

Modular Cooking Range Line thermaline 90 - 40 It Well Freestanding Gas Pasta Cooker, 1 Side, H=800

ITEM #	
MODEL #	
MODEL #	
NAME #	
SIS #	
AIA#	



589451 (MCKFFADDPO)

40lt gas Pasta Cooker, oneside operated

Short Form Specification

Item No.

Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Appliance which can also be used to cook noodles of every kind, rice, dumplings and vegetables. Water basin in 1.4435 (AISI 316L) stainless steel. Integrated drip tray to drain baskets. Safety systems and automatic low-water level shut-off protect against overheating. All-round basin raised edges to protect against soil infiltration. Metal knobs with embedded hygienic silicon ""soft" grip enable easier handling and cleaning.

IPX4 water resistant certification.

Configuration: Freestanding, One-side operated.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "softtouch" grip for easier handling and cleaning.
 The special design of the controls prevents infiltration of liquids or soil into vital components.
- Provided with integrated drip zone on which baskets can be placed for draining purposes.
- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- Easy to clean basin with rounded corners.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Safety systems protect against overtemperature and can be manually reset.
- Safety thermostat and thermostatic control.
- Electrical ignition powered by battery with thermocouple for added safety.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Waterbasin in 1.4435 (AISI 316L) stainless steel is seamlessly welded into the top of the appliance.
- High efficiency burners in AISI 430 stainless steel with flame failure device.
- IPx4 water protection.
- Internal frame for heavy duty sturdiness in stainless steel.

Sustainability



 EnergyControl: unique feature for fine power adjustment to control boiling level and optimize energy consumption.

Optional Accessories

Connecting rail kit, 900mm
 Stainless steel side panel, 900x800mm, freestanding
 Portioning shelf, 400mm width
 Portioning shelf, 400mm width
 PNC 912522 □
 PNC 912522 □
 PNC 912552 □

APPROVAL:






Modular Cooking Range Line thermaline 90 - 40 lt Well Freestanding Gas Pasta Cooker, 1 Side, H=800

	Folding shelf, 300x900mm	PNC 912581		• Endrail kit, flush-fitting, for back-to-back installation, right	PNC 913256	
	Folding shelf, 400x900mm	PNC 912582		Side reinforced panel only in	PNC 913259	
	Fixed side shelf, 200x900mm Fixed side shelf, 300x900mm	PNC 912589 PNC 912590		combination with side shelf, for	1110 710207	
	Fixed side shelf, 400x900mm	PNC 912591		freestanding units		
	Stainless steel front kicking strip, 400mm width	PNC 912594	<u> </u>	 Side reinforced panel only in combination with side shelf, for back-to- back installations, left 	PNC 913277	
•	Stainless steel side kicking strips left and right, freestanding, 900mm width	PNC 912621		Side reinforced panel only in combination with side shelf, for back-to-back installation, right	PNC 913278	
•	Stainless steel side kicking strips left and right, back-to-back, 1810mm width	PNC 912627		Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional	PNC 913673	
•	Stainless steel plinth, freestanding, 400mm width	PNC 912916		thermaline Modular 90 and thermaline C90)		
•	Connecting rail kit: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)	PNC 912975		flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic	PNC 913689	
•	Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC 912976	<u> </u>	 appliances and external appliances - provided that these have at least the same dimensions) Gas mainswitch for modular H800 gas units (factory fitted) 	PNC 913698	
	Endrail kit, flush-fitting, left	PNC 913111		onits (idetory nited)		
	Endrail kit, flush-fitting, right	PNC 913112				
	3 ergonomic baskets for 40lt pasta cooker	PNC 913124				
•	1 square basket for 40lt pasta cooker	PNC 913125				
•	1 ergonomic basket for 40lt pasta cooker	PNC 913126				
•	False bottom for 40lt pasta cooker basket	PNC 913127				
	3 baskets 1/3 GN for 40lt pasta cooker	PNC 913128				
	2 baskets 1/2 GN for 40lt pasta cooker	PNC 913129				
	3 round baskets for 40lt pasta cooker	PNC 913130				
	6 round baskets for 40lt pasta cooker	PNC 913131				
	Grid support for round baskets	PNC 913132				
	Support frame for 6 round baskets 1 basket 1/1 GN for 40lt pasta cooker, ProThermetic braising and pressure braising pans, GN compatible (to be combined with suspension frame)	PNC 913133 PNC 913134				
	Lid for 40lt pasta cooker	PNC 913149				
	Endrail kit (12.5mm) for thermaline 90 units, left					
	Endrail kit (12.5mm) for thermaline 90 units, right		_			
	Stainless steel side panel, left, H=800, flush	PNC 913224				
	Stainless steel side panel, left, H=800, flush	PNC 913225				
	Endrail kit, (12.5mm), for back-to-back installation, left	PNC 913251				
	Endrail kit, (12.5mm), for back-to- back installation, right	PNC 913252				
•	Endrail kit, flush-fitting, for back-to- back installation, left	PNC 913255				





Modular Cooking Range Line thermaline 90 - 40 lt Well Freestanding Gas Pasta Cooker, 1 Side, H=800

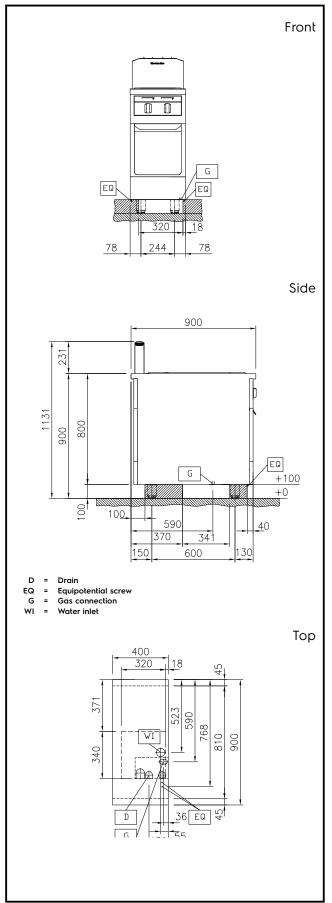

Gas Power: Gas Inlet:	16.5 kW 3/4"
Key Information:	
Number of wells:	1
Usable well dimensions	
(width):	300 mm
Usable well dimensions	
(height):	260 mm
Usable well dimensions	
(depth):	520 mm
Well capacity:	32 lt MIN; 40 lt MAX

Well Capacity (MAX): 40 lt MAX

External dimensions, Width: 400 mm

External dimensions, Depth: 900 mm

External dimensions, Height: 800 mm

Net weight: 73 kg

Gas

73 kg On Base;One-Side

Configuration: Operated

