



Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 90 - Sink unit on closed base, 1 Side with Backsplash

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



589466 (MCZAHBD300)

Sink Unit on Closed Base,
one-side operated with
backsplash

Short Form Specification

Item No. _____

Sink unit on closed base, with a large stainless steel tap, constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: Freestanding, One-side operated with backsplash.

Main Features

- Large stainless steel tap.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- Fitted on a closed base.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com




Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 90 - Sink unit on closed base, 1 Side with Backsplash

Front

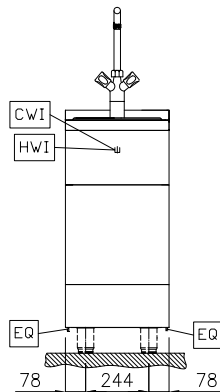


Side

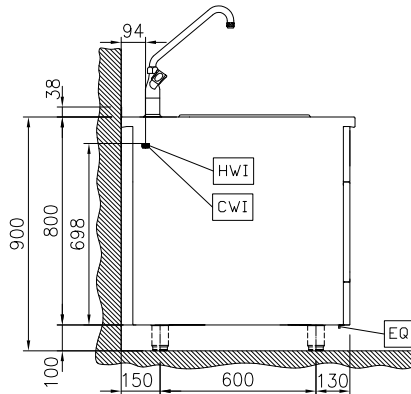

CWI = Cold Water inlet 1 (cleaning)
D = Drain
HWI = Hot water inlet

Top



Water:

Inlet water line size: 3/4"
Drain line size: 1"
Incoming Cold/hot Water line size: 3/4"

Key Information:

External dimensions, Width: 400 mm
External dimensions, Depth: 900 mm
External dimensions, Height: 800 mm
Net weight: 38 kg



Modular Cooking Range Line
thermaline 90 - Sink unit on closed base, 1 Side with Backsplash

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.08.05

Optional Accessories

- | | | | | | |
|---|------------|--------------------------|---|------------|--------------------------|
| • Connecting rail kit for appliances with backsplash, 900mm | PNC 912499 | ☐ | • Side reinforced panel only in combination with side shelf, for against the wall installations, right | PNC 913270 | ☐ |
| • Portioning shelf, 400mm width | PNC 912522 | ☐ | • Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) | PNC 913673 | ☐ |
| • Portioning shelf, 400mm width | PNC 912552 | ☐ | • Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913689 | ☐ |
| • Folding shelf, 300x900mm | PNC 912581 | ☐ | | | |
| • Folding shelf, 400x900mm | PNC 912582 | ☐ | | | |
| • Fixed side shelf, 200x900mm | PNC 912589 | ☐ | | | |
| • Fixed side shelf, 300x900mm | PNC 912590 | ☐ | | | |
| • Fixed side shelf, 400x900mm | PNC 912591 | ☐ | | | |
| • Stainless steel front kicking strip, 400mm width | PNC 912594 | ☐ | | | |
| • Stainless steel side kicking strips left and right, against the wall, 900mm width | PNC 912624 | ☐ | | | |
| • Stainless steel side kicking strips left and right, back-to-back, 1810mm width | PNC 912627 | ☐ | | | |
| • Stainless steel plinth, against wall, 400mm width | PNC 912897 | ☐ | | | |
| • Stainless steel plinth, freestanding, 400mm width | PNC 912916 | ☐ | | | |
| • Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) | PNC 912981 | ☐ | | | |
| • Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) | PNC 912982 | ☐ | | | |
| • Back panel, 400x800mm, for units with backsplash | PNC 913022 | ☐ | | | |
| • Stainless steel panel, 900x800mm, against wall, left side | PNC 913102 | ☐ | | | |
| • Stainless steel panel, 900x800mm, against wall, right side | PNC 913106 | ☐ | | | |
| • Endrail kit, flush-fitting, with backsplash, left | PNC 913117 | ☐ | | | |
| • Endrail kit, flush-fitting, with backsplash, right | PNC 913118 | ☐ | | | |
| • Endrail kit (12.5mm) for thermaline 90 units with backsplash, left | PNC 913208 | ☐ | | | |
| • Endrail kit (12.5mm) for thermaline 90 units with backsplash, right | PNC 913209 | ☐ | | | |
| • U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) | PNC 913226 | ☐ | | | |
| • Insert profile d=900 | PNC 913232 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, left | PNC 913268 | ☐ | | | |