



**Electrolux**  
PROFESSIONAL

**Modular Cooking Range Line  
thermaline 90 - 800 mm Electric  
Warming Cabinet with 2 doors, GN  
conform, 1 Side (H2) - H=550**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**589489 (MC4HDAHOAO)**

Electric Warming Cabinet,  
with 2 doors, one-side  
operated, GN - H2

### Short Form Specification

**Item No.** \_\_\_\_\_

800 mm wide warming cabinet with 2 doors. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Temperature in the cabinet can be set through thermostat, up to a maximum of 110 °C. Cabinet storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

### Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.
- Temperature in the cupboard can be set through a thermostat to suit different requirements. The maximum temperature is 110°C.
- Unit can be installed below modular top appliances, designed to keep plates warm.

### Construction


- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

**APPROVAL:** \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

Front




Side

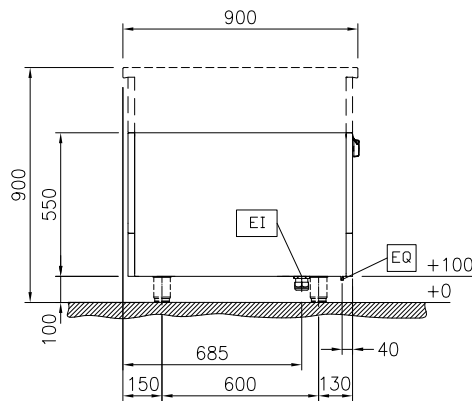

EI = Electrical inlet (power)

Top

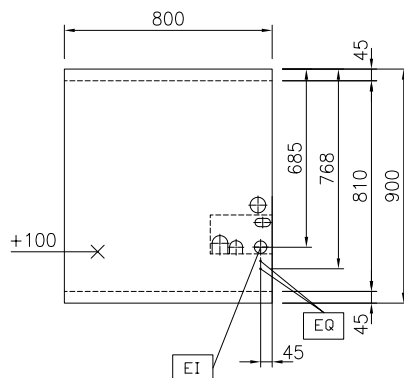

### Key Information:

|                                      |           |
|--------------------------------------|-----------|
| External dimensions, Width:          |           |
| 589489 (MC4HDAHOAO)                  | 800 mm    |
| External dimensions, Depth:          | 900 mm    |
| External dimensions, Height:         | 550 mm    |
| Cupboard Cavity Dimensions (width):  | 580 mm    |
| Cupboard Cavity Dimensions (height): | 330 mm    |
| Cupboard Cavity Dimensions (depth):  | 715 mm    |
| Cabinet temperature range:           | 30-110 °C |
| Net weight:                          | 32 kg     |

### Sustainability

|                      |        |
|----------------------|--------|
| Current consumption: | 5 Amps |
|----------------------|--------|

## Optional Accessories

- |                                                                                                                                                |            |                          |                                                                                                                                                                                                                                                                                 |            |                          |
|------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Stainless steel side panel, 900x800mm, freestanding                                                                                          | PNC 912511 | <input type="checkbox"/> | • Electric main switch 25A 4mm <sup>2</sup> NM for modular H800 electric units (factory fitted)                                                                                                                                                                                 | PNC 913676 | <input type="checkbox"/> |
| • Stainless steel front kicking strip, 800mm width                                                                                             | PNC 912598 | <input type="checkbox"/> | • Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913689 | <input type="checkbox"/> |
| • Stainless steel side kicking strips left and right, freestanding, 900mm width                                                                | PNC 912621 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel side kicking strips left and right, against the wall, 900mm width                                                            | PNC 912624 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel side kicking strips left and right, back-to-back, 1810mm width                                                               | PNC 912627 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel plinth, against wall, 800mm width                                                                                            | PNC 912901 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel plinth, freestanding, 800mm width                                                                                            | PNC 912920 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel panel, 900x800mm, against wall, left side                                                                                    | PNC 913102 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel panel, 900x800mm, against wall, right side                                                                                   | PNC 913106 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Back panel, 800x550mm, for bases one-side operated                                                                                           | PNC 913182 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel side panel, left, H=800, flush                                                                                               | PNC 913224 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel side panel, left, H=800, flush                                                                                               | PNC 913225 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)                       | PNC 913234 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Energy optimizer kit 14A - factory fitted                                                                                                    | PNC 913244 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Side reinforced panel only in combination with side shelf, for freestanding units                                                            | PNC 913259 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, left                                          | PNC 913268 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, right                                         | PNC 913270 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Side reinforced panel only in combination with side shelf, for back-to-back installations, left                                              | PNC 913277 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Side reinforced panel only in combination with side shelf, for back-to-back installation, right                                              | PNC 913278 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated                                                                      | PNC 913281 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |
| • Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) | PNC 913673 | <input type="checkbox"/> |                                                                                                                                                                                                                                                                                 |            |                          |