![Electrolux Professional logo]

Modular Cooking Range Line thermaline 90 - 200 mm Closed base, 1 Side – H=450

589601 (MC3ACOBOOO)   Closed Base, 200mm

Short Form Specification

Item No.

200 mm wide closed base compartment. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Closed base compartment to be installed below modular top units.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
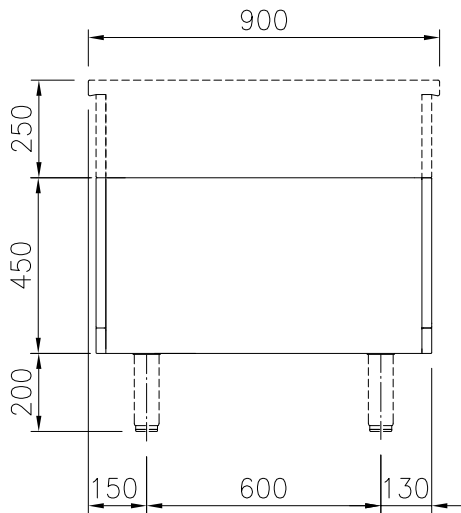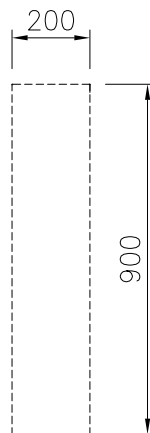- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Front

100

Side

900

250

450

200

150   600   130

Top

200

900

Key Information:

External dimensions, Width:
  589601 (MC3ACOBOOO)   200 mm
External dimensions, Depth: 900 mm
External dimensions, Height: 450 mm
Net weight: 11.5 kg

Modular Cooking Range Line
thermaline 90 - 200 mm Closed base, 1 Side - H=450

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.07.17

Optional Accessories

- Stainless steel side panel, 900x700mm, freestanding | PNC 912512 ❑
- Stainless steel side kicking strip left and right, freestanding, 900mm width | PNC 912657 ❑
- Stainless steel side kicking strips left and right, against the wall, 900mm width | PNC 912660 ❑
- Stainless steel side kicking strip left and right, back-to-back, 1810mm width | PNC 912663 ❑
- Stainless steel plinth, against wall, 200mm width | PNC 912933 ❑
- Stainless steel plinth, freestanding, 200mm width | PNC 912952 ❑
- Stainless steel panel, 900x700mm, against wall, left side | PNC 913101 ❑
- Stainless steel panel, 900x700mm, against wall, right side | PNC 913105 ❑
- Back panel, 200x450mm, for bases one-side operated | PNC 913161 ❑
- Stainless steel side panel, left, H=700 | PNC 913222 ❑
- Stainless steel side panel, right, H=700 | PNC 913223 ❑
- Side reinforced panel only in combination with side shelf, for freestanding units | PNC 913260 ❑
- Side reinforced panel only in combination with side shelf, for against the wall installations, left | PNC 913267 ❑
- Side reinforced panel only in combination with side shelf, for against the wall installations, right | PNC 913269 ❑
- Side reinforced panel only in combination with side shelf, for back-to-back installations, left | PNC 913275 ❑
- Side reinforced panel only in combination with side shelf, for back-to-back installation, right | PNC 913276 ❑
- Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) | PNC 913672 ❑
- Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913688 ❑

2025.07.17