Modular Cooking Range Line thermaline 90 - 200 mm Closed base, 1 Side - H=550

ITEM #

MODEL #

NAME #

SIS #

AIA #

589602 (MC3ADOBOOO)   Closed Base, 200mm

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
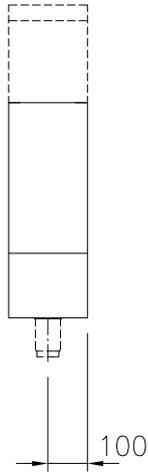- Closed base compartment to be installed below modular top units.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

Short Form Specification

Item No.

200 mm wide closed base compartment. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base.
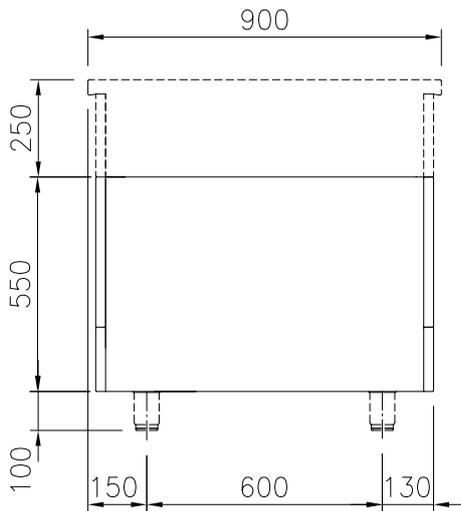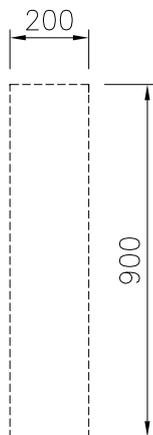
APPROVAL:

Key Information:

External dimensions, Width:
  589602 (MC3ADOBOOO)   200 mm
External dimensions, Depth: 900 mm
External dimensions, Height: 550 mm
Net weight: 11.5 kg

Front

100

Side

900

250

550

100

150   600   130

Top

200

900

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.03.02

Optional Accessories

• Stainless steel side panel, 900x800mm, freestanding	PNC 912511	❑
• Stainless steel side kicking strips left and right, freestanding, 900mm width	PNC 912621	❑
• Stainless steel side kicking strips left and right, against the wall, 900mm width	PNC 912624	❑
• Stainless steel side kicking strips left and right, back-to-back, 1810mm width	PNC 912627	❑
• Stainless steel plinth, against wall, 200mm width	PNC 912895	❑
• Stainless steel plinth, freestanding, 200mm width	PNC 912914	❑
• Stainless steel panel, 900x800mm, against wall, left side	PNC 913102	❑
• Stainless steel panel, 900x800mm, against wall, right side	PNC 913106	❑
• Back panel, 200x550mm, for bases one-side operated	PNC 913176	❑
• Stainless steel side panel, left, H=800, flush	PNC 913224	❑
• Stainless steel side panel, left, H=800, flush	PNC 913225	❑
• Side reinforced panel only in combination with side shelf, for freestanding units	PNC 913259	❑
• Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913268	❑
• Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913270	❑
• Side reinforced panel only in combination with side shelf, for back-to-back installations, left	PNC 913277	❑
• Side reinforced panel only in combination with side shelf, for back-to-back installation, right	PNC 913278	❑
• Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)	PNC 913673	❑
• Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913689	❑

2026.03.02