

Modular Cooking Range Line thermaline 90 - 800 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) -H=450 (Marine)

ITEM #
MODEL #
NAME #
SIS #
AIA #



589906 (MC1JCAHOOM)

Cupboard Base with 2 doors, one-side operated, GN - H3, Marine feet

Short Form Specification

Item No.

800 mm wide cupboard base with 2 doors with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers. IPX5 water resistant certification. Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Cupboard compartment for storage of pots, pans, sheet pans etc.

Construction


- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

Optional Accessories

•	Stainless steel side panel, 900x700mm, freestanding	PNC 912512	
•	Stainless steel front kicking strip, 800mm width	PNC 912634	
•	Stainless steel side kicking strip left and right, freestanding, 900mm width	PNC 912657	
•	Stainless steel side kicking strips left and right, against the wall, 900mm width	PNC 912660	
•	Stainless steel side kicking strip left and right, back-to-back, 1810mm width	PNC 912663	
•	Stainless steel plinth, against wall, 800mm width	PNC 912939	
•	Stainless steel plinth, freestanding, 800mm width	PNC 912958	
•	Stainless steel panel, 900x700mm, against wall, left side	PNC 913101	
•	Stainless steel panel, 900x700mm, against wall, right side	PNC 913105	
•	Back panel, 800x450mm, for bases one-side operated	PNC 913167	
•	Stainless steel side panel, left, H=700	PNC 913222	
•	Stainless steel side panel, right, H=700	PNC 913223	

APPROVAL:








 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913234	
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913260	
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913267	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913269	
 Side reinforced panel only in combination with side shelf, for back- to-back installations, left 	PNC 913275	
 Side reinforced panel only in combination with side shelf, for back- to-back installation, right 	PNC 913276	
 Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated 	PNC 913281	
Stainless steel dividing panel, 900x700mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90)	PNC 913672	
• Stainless steel side panel, 900x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913688	



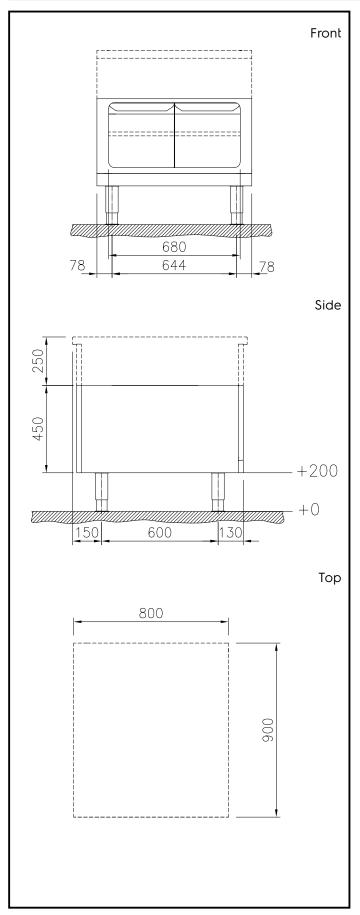

Key Information:

External dimensions, Width:

589906 (MCIJCAHOOM) 800 mm External dimensions, Depth: 900 mm External dimensions, Height: 450 mm

Cupboard Cavity Dimensions

(width): 580 mm

Cupboard Cavity Dimensions

(height): 330 mm Cupboard Cavity Dimensions

 (depth):
 715 mm

 Net weight:
 30 kg

Modular Cooking Range Line
thermaline 90 - 800 mm Cupboard base with 2 doors, GN conform, 1
Side (H2) - H=450 (Marine)
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.