

Pizza counters Bench Type Refrigerated Show Case 1780mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


291214 (ZVRI780H)

 Bench type Refrigerated
 Show Case 1780 mm

Short Form Specification

Item No. _____

Constructed in 304 AISI stainless steel. Designed for use with 1/4GN and 1/2GN containers (not included). Built-in refrigeration unit. Refrigerant R290. Thermostatic temperature control. Temperature range: 0+10°C. CFC and HCFC free.

Main Features

- Complies with main international certification bodies and is CE marked.
- Supplied for use without the protective glass panels (side, back and top) which must be ordered separately as accessories.
- Designed for use with the specific sets of stainless steel 1/4 and 1/2 GN containers (without lids) which are available as accessories.
- Showcase suitable to accommodate ¼ and ½ GN trays available as accessories.
- Tropicalized unit.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Showcase provided with power supply cable exit on left or back sides to suit all type of installations.

Sustainability

- Provided with its own integral, highly efficient refrigeration unit with low noise emission and reduced energy consumption. Temperature thermostatically controlled.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


Optional Accessories

- Glass panels for refrigerated showcase, 1780 mm PNC 291496
- GN containers for refrigerated 1780 mm show case - n. 4x1/4 + n. 2x1/2 h. 150 mm PNC 921850

Recommended Detergents

- S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T PNC 0S2881
- S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity PNC 0S3257

APPROVAL: _____

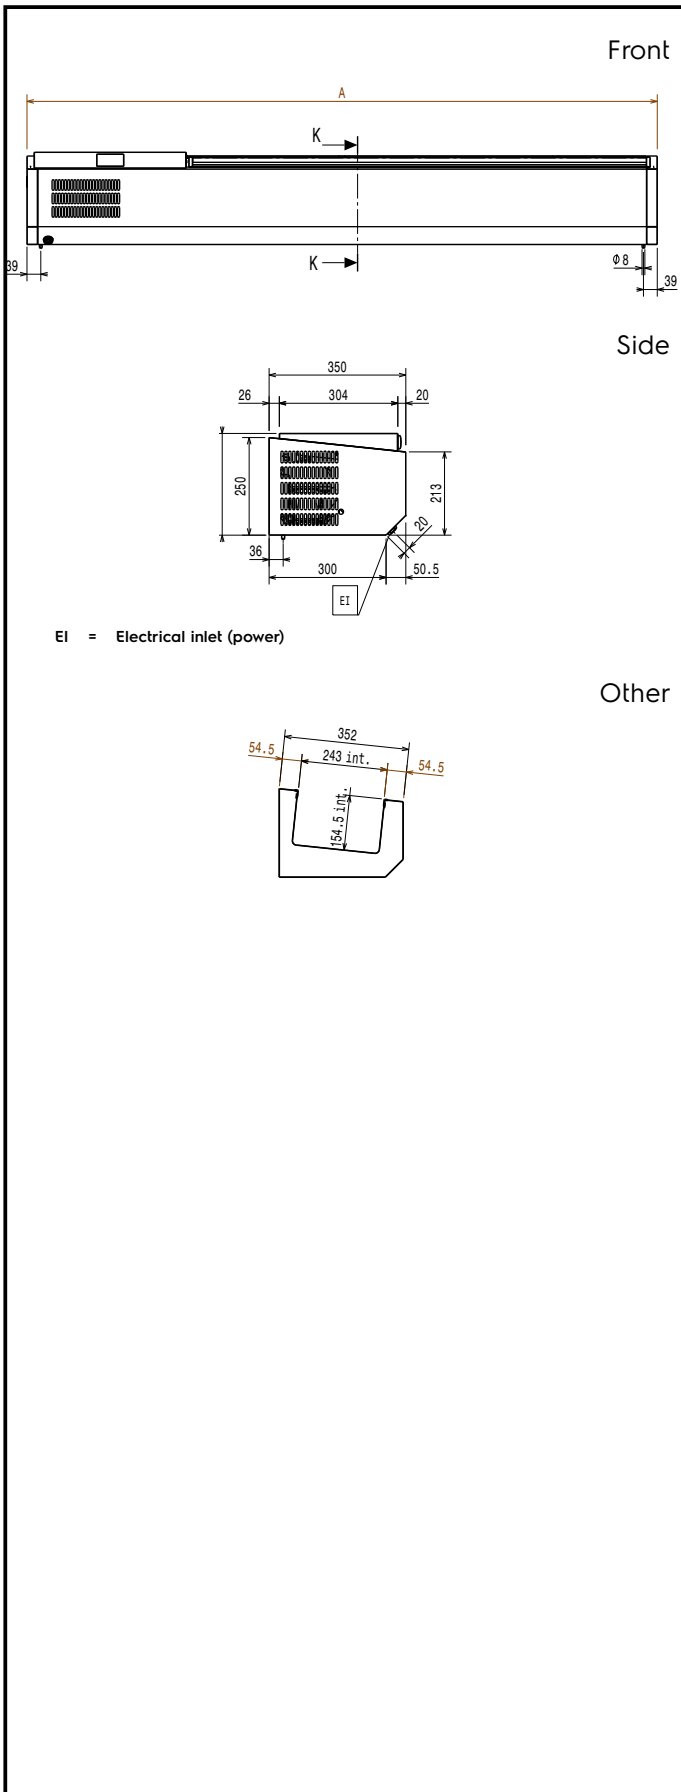

Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Electrical power, max:	0.2 kW

Key Information:

External dimensions, Width:	1780 mm
External dimensions, Depth:	350 mm
External dimensions, Height:	250 mm
Net weight:	42 kg

Refrigeration Data

Control type:	Digital
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C

ISO Certificates

ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
----------------	---

Sustainability

Refrigerant type:	R290
Refrigeration power:	314 W