

Pizza counters Bench Type Refrigerated Show Case 2400mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


291216 (ZVR2400H)

 Bench type Refrigerated
 Show Case 2400 mm

Short Form Specification

Item No. _____

Constructed in 304 AISI stainless steel. Designed for use with 1/4GN and 1/2GN containers (not included). Built-in refrigeration unit. Refrigerant R290. Thermostatic temperature control. Temperature range: 0+10°C. CFC and HCFC free.

Main Features

- Complies with main international certification bodies and is CE marked.
- Supplied for use without the protective glass panels (side, back and top) which must be ordered separately as accessories.
- Designed for use with the specific sets of stainless steel 1/4 and 1/2 GN containers (without lids) which are available as accessories.
- Showcase suitable to accommodate ¼ and ½ GN trays available as accessories.
- Tropicalized unit.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Showcase provided with power supply cable exit on left or back sides to suit all type of installations.

Sustainability

- Provided with its own integral, highly efficient refrigeration unit with low noise emission and reduced energy consumption. Temperature thermostatically controlled.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


Optional Accessories

- Glass panels for refrigerated showcase, 2400 mm PNC 291499
- GN containers for refrigerated 2400 mm show case - n. 6x1/4 + n. 3x1/2 h. 150 mm PNC 921853

Recommended Detergents

- S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T PNC 0S2881
- S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity PNC 0S3257

APPROVAL: _____

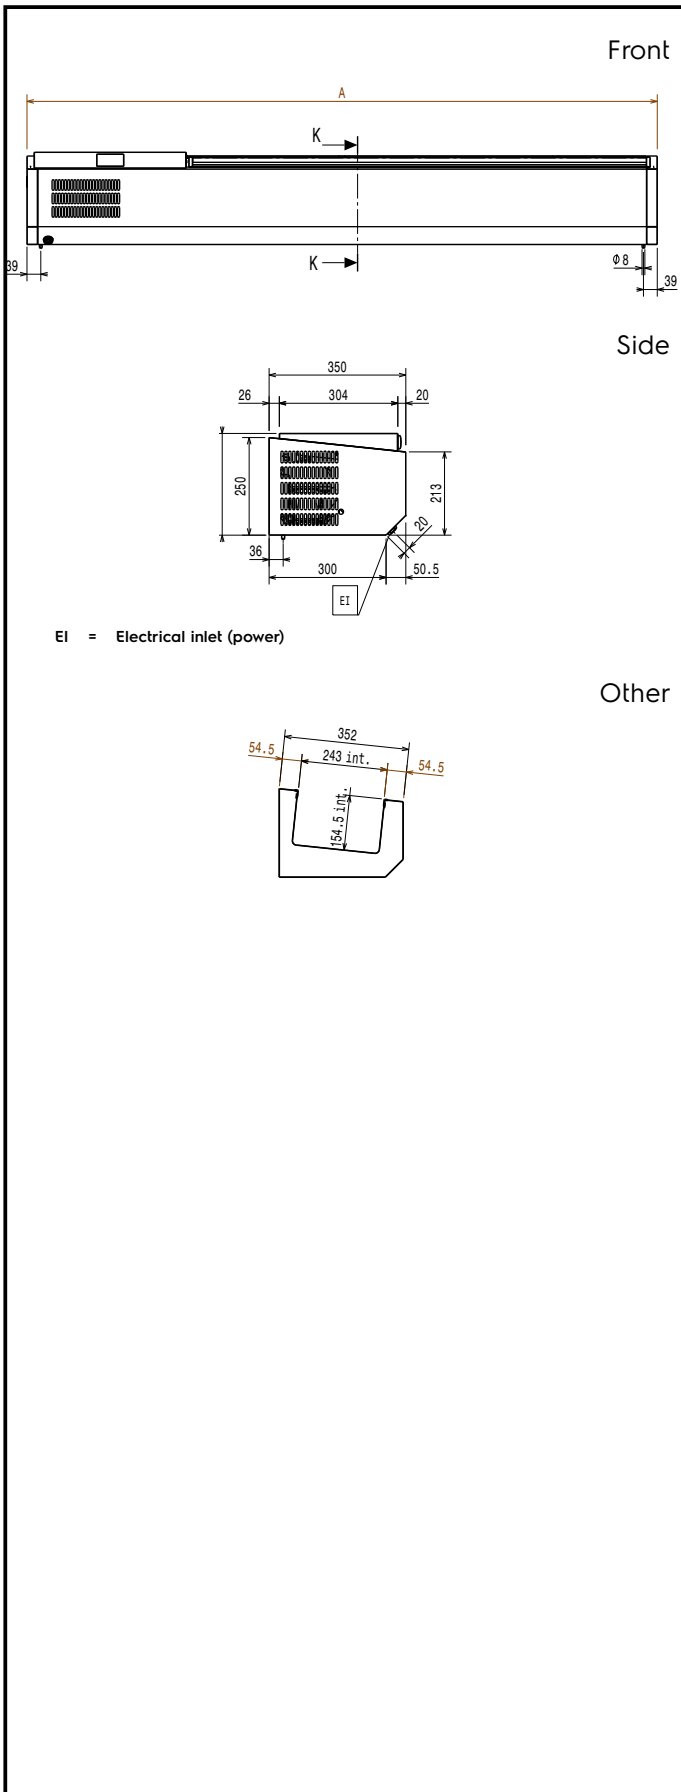

Electric

Supply voltage: 220-240 V/1 ph/50 Hz
 Electrical power, max: 0.24 kW

Key Information:

External dimensions, Width: 2400 mm
 External dimensions, Depth: 350 mm
 External dimensions, Height: 250 mm
 Net weight: 51 kg

Refrigeration Data

Control type: Digital
 Operating temperature min.: 0 °C
 Operating temperature max.: 10 °C

ISO Certificates

ISO Standards: ISO 9001; ISO 14001; ISO 45001; ISO 50001

Sustainability

Refrigerant type: R290
 Refrigeration power: 314 W