

## Drop-In Drop-in refrigerated well, static (2 GN container capacity) with A overshelf

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**341177 (D10C20)**

Drop-in Refrigerated Well, static (2 GN container capacity) with one A type overshelf and LED light

### Short Form Specification

**Item No.** \_\_\_\_\_

Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free. Designed to serve the food in gastronorm containers. Suitable for GN 1/1 containers with a maximum height of 200 mm. Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole. Automatic defrosting guarantees evaporators clearance and efficient well cooling. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. Stylish A type overshelf designed for extra increased visibility on the surface for charming food display. Overshelf equipped with LED lights.

### Main Features

- CB and CE certified by a third party notified body.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with LED lights.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.

### Construction

- Electronic control with temperature display.
- Well bottom is inclined to facilitate water drainage.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled.
- Overshelf in complete AISI 304.

### Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy

**APPROVAL:** \_\_\_\_\_



**Electrolux**  
PROFESSIONAL


**Drop-In  
Drop-in refrigerated well, static (2 GN  
container capacity) with A  
overshelf**

dispersion.


**Drop-In  
Drop-in refrigerated well, static (2 GN container capacity) with A  
overshelf**  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2026.03.09

Front

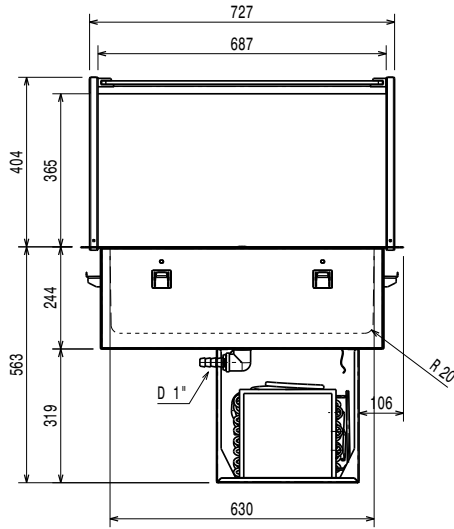


Side

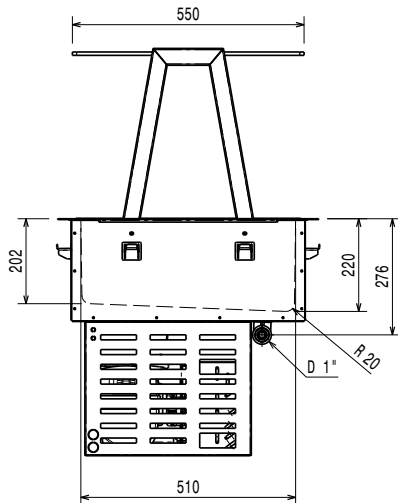

EI = Electrical inlet (power)

Top

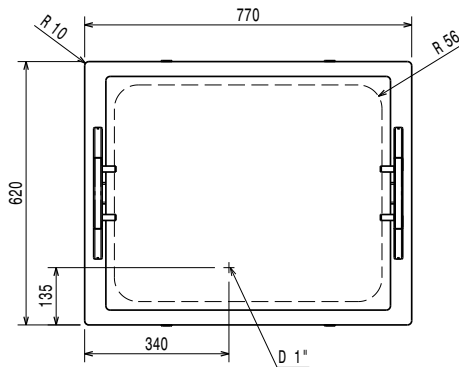

## Electric

Supply voltage: 220-240 V/1N ph/50 Hz  
 Electrical power, max: 0.44 kW

## Water:

Water drain outlet size:

## Key Information:



External dimensions, Width: 770 mm  
 External dimensions, Depth: 620 mm  
 External dimensions, Height: 999 mm  
 Net weight: 57.06 kg  
 Shipping weight: 74 kg  
 Shipping height: 1230 mm  
 Shipping width: 670 mm  
 Shipping depth: 820 mm  
 Shipping volume: 0.68 m<sup>3</sup>  
 Set temperature: -15 / 0 °C

## Refrigeration Data



Refrigerant type: R290

## Sustainability

Noise level: 56 dBA

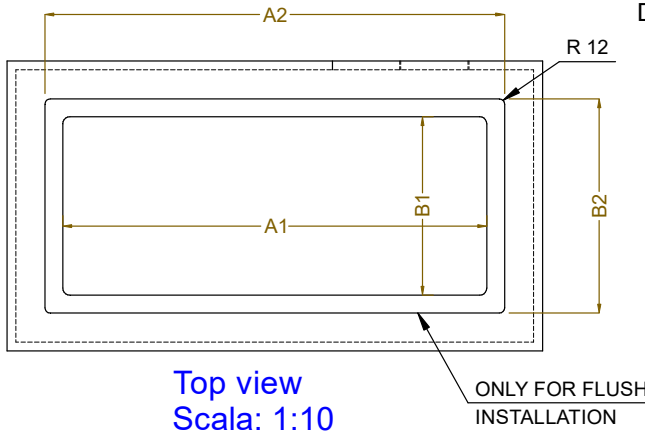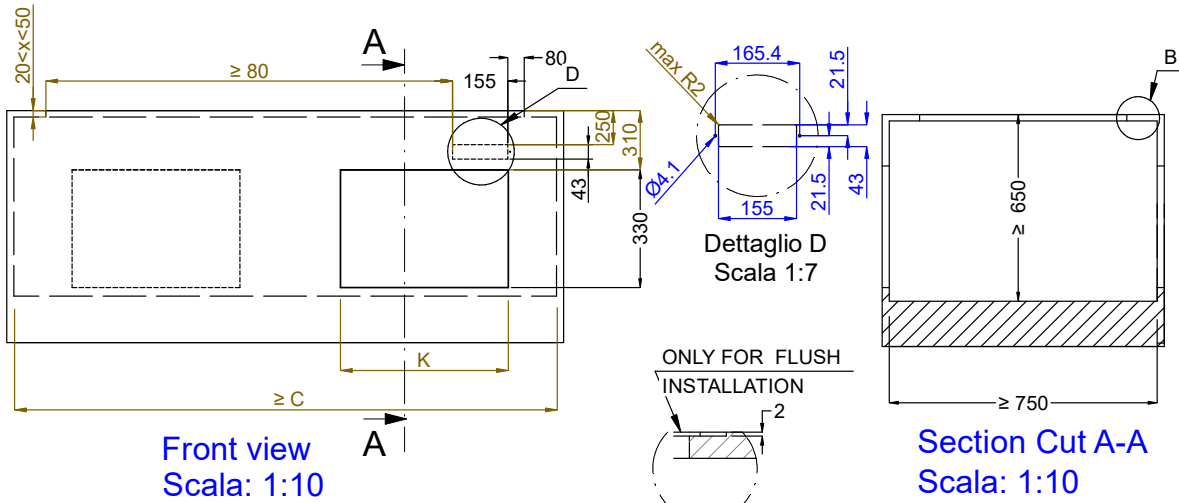

CAPACITY	CUTOUT		LOWERING FOR FLUSH INSTALLATION		C	K
	A1	B1	A2	B2		
2GN	740	580	774	624	880	470
3GN	1070		1104			
4GN	1390		1424			

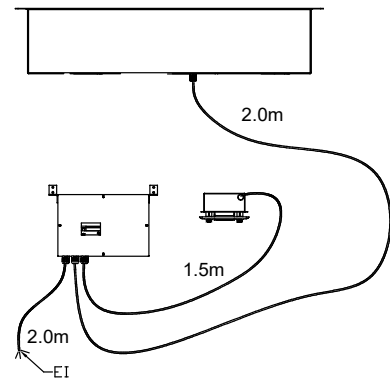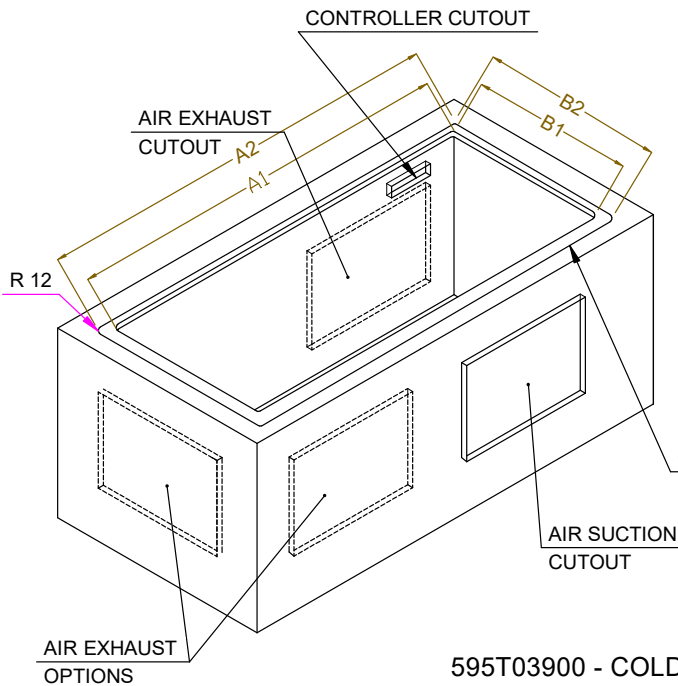

595T03900 - COLD STATIC WELL OVERSH. ON THE FRAME