

## Coffee System PrecisionBrew warmer shuttle single brewer with UK plug

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**600806 (EPBC1W2UK)**

PrecisionBrew Warmer Shuttle Brewer, single - shuttle to be ordered separately - UK plug

### Short Form Specification

**Item No.** \_\_\_\_\_

Single PrecisionBrew warmer shuttle brewer that brews into 5.7lt warmer shuttle. Shuttles® sensor prevents brewing when server is not in place. Digitally controlled with PrecisionBrew™ Technology. Advanced touchscreen digital interface simplifies and streamlines brewing and operation.

Delivered with UK plug.

### Main Features

- Sensor prevents brewing when shuttle is not in place.
- Machine knows if brew basket is installed.
- Digitally controlled with PrecisionBrew™ Technology.
- Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation.
- Reimagined modern design for PrecisionBrew™: single and double sightglass models brew into 5.7 L warmer Shuttle(s)®.

### Included Accessories


- 1 of Stainless steel coffee brew basket PNC 870059

### Optional Accessories


- 5,7 lt Warmer shuttle used with brewers EPBC1W2, EPBC1W2UK, EPBC2W2, EPBC2W2UK PNC 600682
- Remote warmer shuttle stand - UK plug PNC 600813
- Shuttle graphics for warmer Precision Brewers used with shuttle EWS15 PNC 870017
- Filter paper, 35,5x15,2 cm (500 pieces per box) PNC 870024
- Plastic coffee brew basket PNC 870040

**APPROVAL:** \_\_\_\_\_


Side

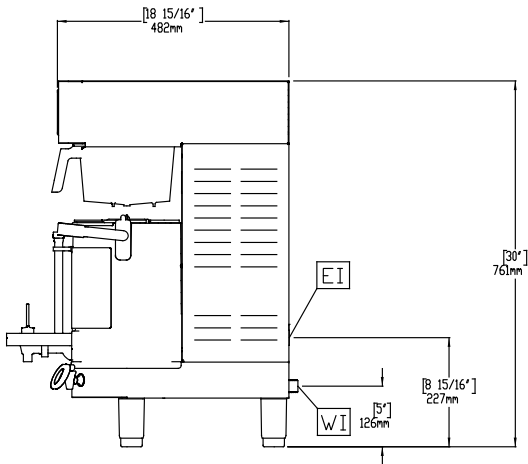

Front



Top

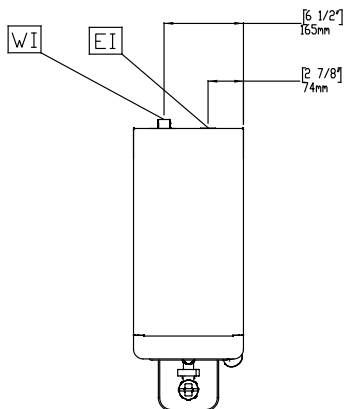

## Electric

Supply voltage:

600806 (EPBC1W2UK) 230 V/1N ph/50/60 Hz

Electrical power max.:

2.3 kW

## Key Information:

External dimensions, Width: 232 mm

External dimensions, Depth: 486 mm

External dimensions, Height: 852 mm

Net weight: 20 kg

Shipping weight: 28 kg

Shipping height: 780 mm

Shipping width: 360 mm

Shipping depth: 650 mm

Shipping volume: 0.18 m<sup>3</sup>