



## Modular Cooking Range Line 900XP 2 Drawer Refrigerated Base (60Hz)

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



391603 (E9TTAPCOMIN)

Refrigerated base with 2 drawers, -2/+10° C, automatic evaporation of defrost condense - R290 (Brazil, Saudi Arabia)

### Short Form Specification

#### Item No.

Refrigerated base with 2 drawers. Built-in refrigerator compressor unit. Operating temperature range from -2°C to 10°C. To be installed below 900XP top units. To be delivered with 50 mm height adjustable feet. Exterior panels in stainless steel with Scotch Brite finish. Suitable to operate with ambient temperature up to +43°C. Constructed to allow flush-fitting junction between units.

### Main Features

- Unit can be easily installed below other 900 line top models.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Designed for modular installation into the cooking block.
- Anti-tilt runners accept GN 1/1 containers.

### Construction

- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

### Sustainability



- CFC and HCFC free (highly ecological refrigerant type: R290).

### Optional Accessories


- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 1200mm PNC 206151 ☐
- Frontal kicking strip, 1200mm (not for refr-freezer base) PNC 206178 ☐
- Rear paneling - 1200mm (700/900) PNC 206376 ☐
- Kit 3 base support for wheels PNC 206430 ☐
- Kit 6 wheels - 3 swivelling with brake PNC 206432 ☐

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

Front

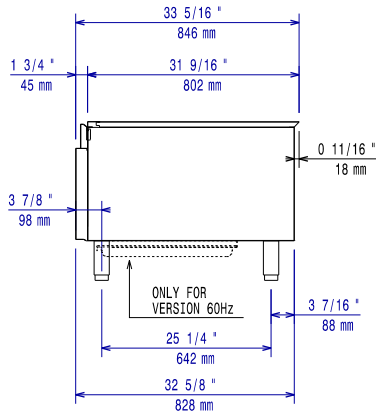


Side

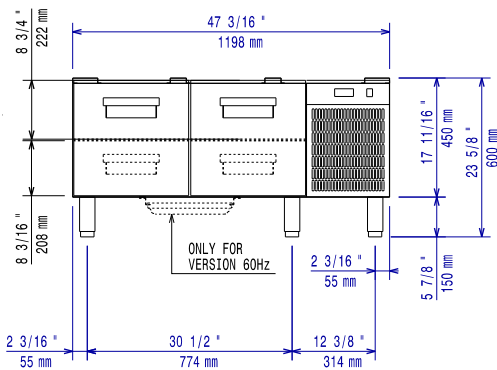

D = Drain  
 EI = Electrical inlet (power)

Top

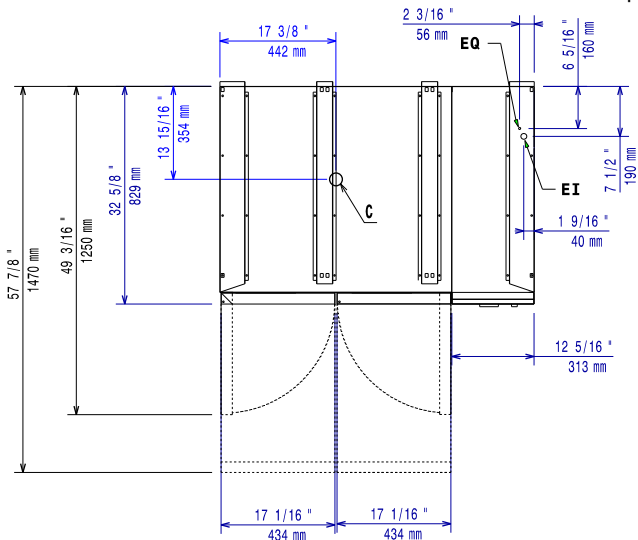

### Electric

|                        |                       |
|------------------------|-----------------------|
| Supply voltage:        | 220-230 V/1N ph/60 Hz |
| Electrical power, max: | 0.4 kW                |
| Total Watts:           | 0.4 kW                |

### Key Information:

|                              |                     |
|------------------------------|---------------------|
| External dimensions, Width:  | 1200 mm             |
| External dimensions, Depth:  | 830 mm              |
| External dimensions, Height: | 600 mm              |
| Net weight:                  | 114 kg              |
| Shipping weight:             | 121 kg              |
| Shipping height:             | 820 mm              |
| Shipping width:              | 1060 mm             |
| Shipping depth:              | 1300 mm             |
| Shipping volume:             | 1.13 m <sup>3</sup> |
| Gross capacity:              | 140 lt              |

### Refrigeration Data

Compressor power:

### Sustainability

|                              |      |
|------------------------------|------|
| Refrigerant type:            | R290 |
| Refrigerant weight (unit 1): | 85 g |