



Electrolux
PROFESSIONAL

Crosswise Convection Gas Convection Oven, 20 GN2/1

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



260704 (FCG202)

Convection Oven Crosswise
20x2/1GN, gas

Short Form Specification

Item No. _____

Main structure in stainless steel, with seamless joints in the oven cavity. Double-glazed door with tempered glass. Cavity lighting. Unique air-flow channel system. Atmospheric burner.

Cooking cycles: air convection, convection with 5 stage humidification. Max. temperature of 300°C.

Functional level: base, manual.

"Cross-wise" pan rack suitable for 20x2/1GN or 40x1/1GN.

Supplied with n. 1 roll-in rack, 60mm pitch, and n. 2 roll-in rack slides.

Main Features

- Racks can be easily removed without the need for special tools.
- Unique air-flow system guarantees perfect distribution of heat throughout the oven cavity.
- Maximum temperature of 300°C.
- Food temperature probe (available as accessory).
- Rapid cooling of oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- 5 Stage humidification control, to ensure perfect pastries and succulent roasts.
- Meets the requirements of CE, VDE and DVGW for safety.

Construction

- Access to all components from the front.
- Stainless steel oven cavity with rounded corners.
- Double-glazed door with tempered glass.
- External access door for electrical connections.
- All connections made on the left side below the oven.
- Integrated drain outlet.
- IPx4 water protection.

Included Accessories

- 1 of 60mm pitch roll-in rack for 20x2/1GN PNC 922204

Optional Accessories

- Water softener with salt for ovens with automatic regeneration of resin PNC 921305 ☐
- Fat filter for gas 10 and 20 1/1 and 2/1 GN ovens (2 filters are necessary for 20-grid ovens) PNC 921700 ☐
- Probe for ovens 20x1/1 and 2/1GN PNC 921704 ☐
- Flue condenser for gas ovens 20x2/1GN PNC 921712 ☐
- Trolley for 20x2/1GN roll-in rack PNC 922134 ☐
- Base for 20x2/1GN roll-in rack PNC 922142 ☐
- External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) PNC 922171 ☐
- Pair of baking tray support PNC 922173 ☐
- Pair of AISI 304 stainless steel grids, GN 2/1 PNC 922175 ☐
- 60mm pitch roll-in rack for 20x2/1GN PNC 922204 ☐
- 80mm pitch roll-in rack for 20x2/1GN PNC 922206 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com



Electrolux
PROFESSIONAL

Crosswise Convection Gas Convection Oven, 20 GN2/1

- Pair of frying baskets PNC 922239 ☐
- Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens PNC 922325 ☐
- Universal skewer rack PNC 922326 ☐
- 6 short skewers PNC 922328 ☐
- Volcano Smoker for lengthwise and crosswise oven PNC 922338 ☐



Crosswise Convection
Gas Convection Oven, 20 GN2/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2024.04.16




Electrolux
PROFESSIONAL

Crosswise Convection Gas Convection Oven, 20 GN2/1

Front

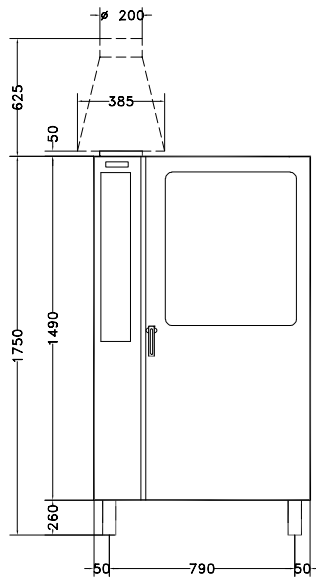


Side

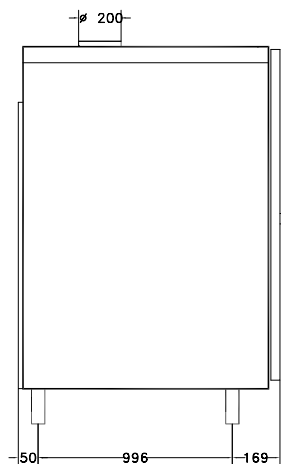

CWI1 = Cold Water inlet 1 (cleaning)
CWI2 = Cold Water Inlet 2 (steam generator)
D = Drain
EI = Electrical inlet (power)

G = Gas connection

Top

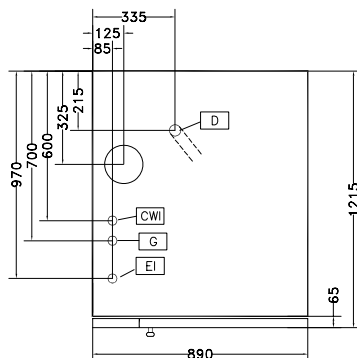

Electric

Supply voltage:
260704 (FCG202) 220-230 V/1 ph/50 Hz
Auxiliary: 1 kW
Electrical power max.: 1 kW

Gas

Gas Power: 50 kW

Capacity:

Shelf capacity: ISO 9001; ISO 14001

Key Information:

External dimensions, Width: 890 mm
External dimensions, Depth: 1215 mm
External dimensions, Height: 1700 mm
Net weight: 311.8 kg
Height adjustment: 80/0 mm
Functional level: Basic
Type of grids: 2/1 Gastronorm
Runners pitch: 60 mm
Cooking cycles - air-convection: 300 °C
Internal dimensions, Width: 590 mm
Internal dimensions, Depth: 760 mm
Internal dimensions, Height: 1350 mm

ISO Certificates

ISO Standards: ISO 9001; ISO 14001; ISO 45001; ISO 50001

Crosswise Convection
Gas Convection Oven, 20 GN2/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.04.16

