

# GRINDMASTER

## Coffee System PrecisionBrew air-heated shuttle single brewer

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



600621 (PBC1A2CE)

PrecisionBrew single air-heated shuttle brewer (shuttle not included)

### Short Form Specification

Item No. \_\_\_\_\_

Single, air-heated PrecisionBrew™ shuttle brewer that brews into 5.7L shuttle. Shuttles® sensor prevents brewing when server is not in place. Java-tate™ technology inside the shuttles gently stirs the brewed coffee at regular short intervals, keeping the drink perfectly blended, and ensuring a consistent flavor profile. Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation. Standard electronic basket lock prevents basket removal during brewing and dripout.

### Main Features

- Reimagined modern design for PrecisionBrew™: single and double virtual sightglass models brew into 5.7 L air-heated Shuttle(s)®.
- Portable Encapsulair Shuttles insulate with air between the internal chambers, maintaining coffee temperature and flavor.
- Java-tate technology inside the shuttles gently stirs the brewed coffee at regular intervals, keeping the coffee perfectly blended, ensuring a consistent flavor profile.
- Customers can see the blending through the virtual sight glass with multi-colored lights, but with no sightglass to clean.
- Sensor prevents brewing when shuttle is not in place.
- Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation.
- Interactive diagnostics through touch display.

### Construction

- Electronic basket lock prevents basket removal during brewing and dripout.
- 12.1 L heating tank per brew head independent water tanks ensure consistent temperature and volume.

### Included Accessories


- 1 of Plastic brew basket for PNC 870040 coffee

APPROVAL: \_\_\_\_\_


# GRINDMASTER

## Coffee System PrecisionBrew air-heated shuttle single brewer


Front



Side

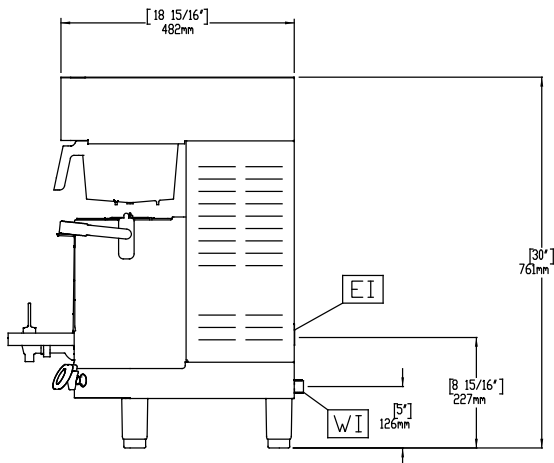

Top

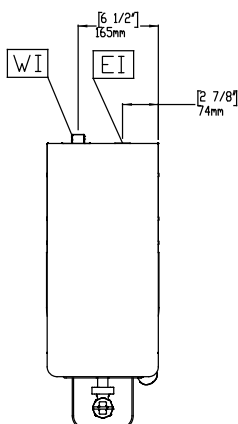

### Electric

Supply voltage:

600621 (PBC1A2CE)

230 V/1 ph/50/60 Hz

Electrical power max.:

2.8 kW

### Key Information:

External dimensions, Width: 232 mm

External dimensions, Depth: 479 mm

External dimensions, Height: 765 mm

Net weight: 18 kg

Shipping weight: 23 kg

Shipping height: 784 mm

Shipping width: 359 mm

Shipping depth: 654 mm

Coffee System

PrecisionBrew air-heated shuttle single brewer

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



2023.03.09