

# GRINDMASTER

## Coffee System PrecisionBrew double warmer shuttle brewer

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



600624 (PBC2W2CE)

PrecisionBrew double warmer shuttle brewer (shuttle not included)

### Short Form Specification

Item No. \_\_\_\_\_

Double PrecisionBrew warmer shuttle brewer that brews into 5.7lt vacuum shuttle. Shuttles® sensor prevents brewing when server is not in place. Digitally controlled with PrecisionBrew™ Technology. Advanced touchscreen digital interface simplifies and streamlines brewing and operation.

### Main Features

- Sensor prevents brewing when shuttle is not in place.
- Machine knows if brew basket is installed.
- Digitally controlled with PrecisionBrew™ Technology.
- Intuitive, icon-driven touchscreen digital interface simplifies and streamlines brewing and operation.
- Reimagined modern design for PrecisionBrew™: single and double sightglass models brew into 5.7 L warmer Shuttle(s)®.
- Interactive diagnostics through touch display.

### Construction

- 12.1 L heating tank per brew head independent water tanks ensure consistent temperature and volume.

### Included Accessories


- 2 of Plastic brew basket for PNC 870040 coffee

APPROVAL: \_\_\_\_\_


# GRINDMASTER

## Coffee System PrecisionBrew double warmer shuttle brewer


Front

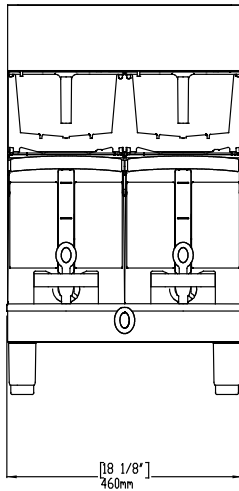

Side

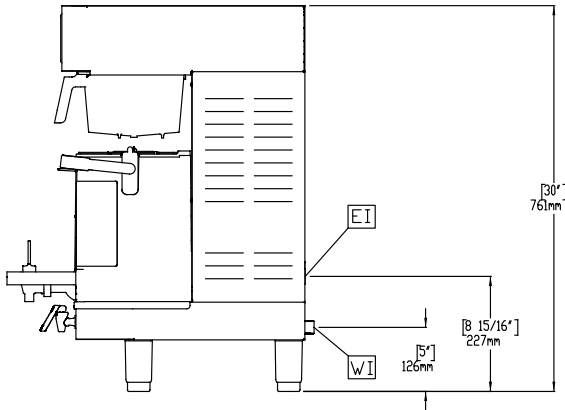

Top

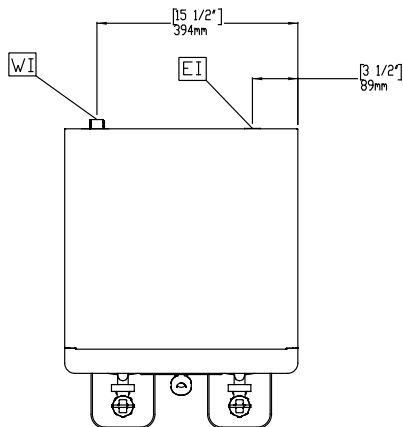

### Electric

Supply voltage:

600624 (PBC2W2CE)

230 V/1 ph/50/60 Hz

Electrical power max.:

2.8 kW

### Key Information:

External dimensions, Width: 460 mm

External dimensions, Depth: 486 mm

External dimensions, Height: 852 mm

Net weight: 34 kg

Shipping weight: 42 kg

Shipping height: 890 mm

Shipping width: 590 mm

Shipping depth: 650 mm

Coffee System  
PrecisionBrew double warmer shuttle brewer

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2023.03.09

