

**Chest Freezer
Sliding Glass Lid Novelty
Freezer 38" Long**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738090 (KCNF073WS)

Sliding Glass Lid Novelty
Freezer 38" Long

Short Form Specification

Item No. _____

Glass lids top chest freezer with internal structure in painted steel and external structure in textured painted steel. Fan cooler condenser and 1/6 HP compressor. Freezer baskets and internal digital control with cabinet temperature display. Locking lids and key to protect the contents in the unit. Equipped with NEMA 5-15P plug.

Basket and NSF®-Certified Temperature Gauge.

Main Features

- Fan cooled condenser to cope with heavy duty conditions
- Mechanical control panel with adjustable temperature
- Basket - Durable and reliable for safety in food storage (1 basket included).
- NSF®-Certified Temperature Gauge - Durable and reliable for safety in food storage.

Construction

- Heavy Duty Castors
- Static Condenser
- Tempered glass sliding lids
- Exterior and Interior finish in white painted steel
- Locking lids and key protect the contents of the unit


Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

Optional Accessories

- Basket for Glass Lid Chest Freezer PNC 882003
16.26x8.66x9.53 in (413x220x242 mm)

APPROVAL: _____

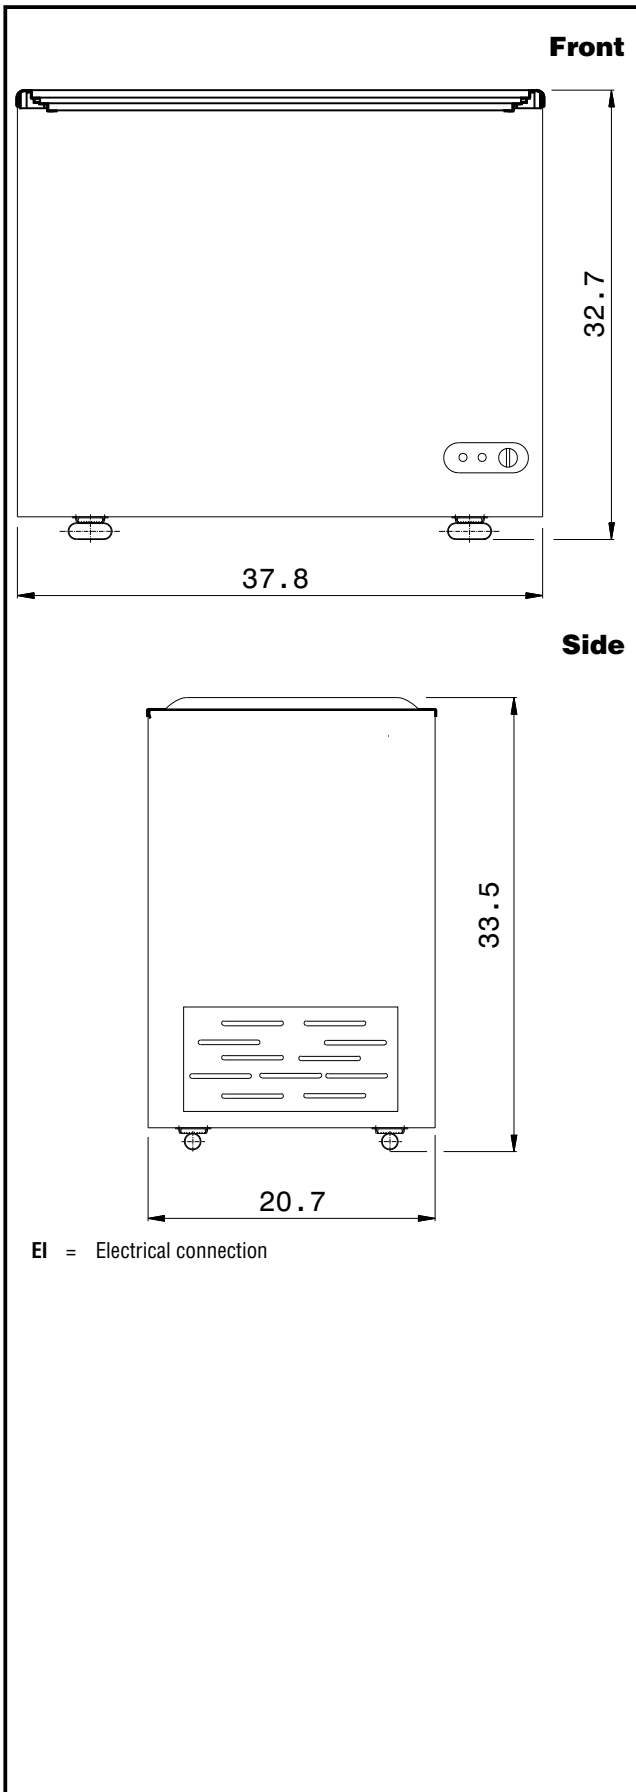

Electric

Supply voltage:	738090 (KCNF073WS)	115 V/1 ph/60 Hz
Electrical power, max:		0.3 kW
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	14.9 cu.feet
-----------------	--------------

Key Information:

External dimensions, Width:	37 13/16" (960 mm)
External dimensions, Depth:	20 11/16" (525 mm)
External dimensions, Height:	33 1/16" (840 mm)
Internal dimensions, Height:	26 " (660.4 mm)
Internal Dimensions (depth):	15 " / (381 mm)
Internal Dimensions (width):	32 " / (812.8 mm)
Net weight:	88 lbs (40 kg)
Shipping width:	23 1/32" (585 mm)
Shipping height:	34 5/8" (880 mm)
Shipping weight:	88 lbs (40 kg)
Shipping volume:	18.27 ft ³ (0.52 m ³)
Approvals	;ETL C&US;ETL SANITATION

Refrigeration Data

Compressor power:	1/6 hp
Operating temperature min.:	-18.4 °F
Operating temperature max.:	3.2 °F

Sustainability

Current consumption:	1.2 Amps
Refrigerant type:	R600a
GWP Index:	3
Refrigerant weight:	25 g