

**Refrigeration Equipment  
1-Door Full Height Freezer 27  
" Long**



738244 (KCHRI27R1DFE)

1-Door Full Height Freezer 27  
" Long

**Short Form Specification**

**Item No.**

1 full door freezer with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing door with Lock and Key. On-site reversible door feature, with required left side door hinge.

Cabinet capable of accepting a full-size sheet pan (18X26).

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

**ITEM #** \_\_\_\_\_  
**MODEL #** \_\_\_\_\_  
**NAME #** \_\_\_\_\_  
**SIS #** \_\_\_\_\_  
**AIA #** \_\_\_\_\_

**Main Features**

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting a full-size sheet pan (18X26)

**Construction**

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Door reversible on site

**Sustainability**

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- 60 mm insulation for energy saving.

**Optional Accessories**

- 1 ADJUSTABLE FOOT PNC 206445
- Shelf for 27" Reach-In (Solid Door) PNC 880590
- Shelf clips (4-pack) PNC 880611
- Sheet Pan Rack Fits KCHRI Models PNC 880622


**APPROVAL:**

Part of




Electrolux  
Professional  
Group


**Kelvinator Commercial**  
[www.kelvinatorcommercial.com](http://www.kelvinatorcommercial.com)

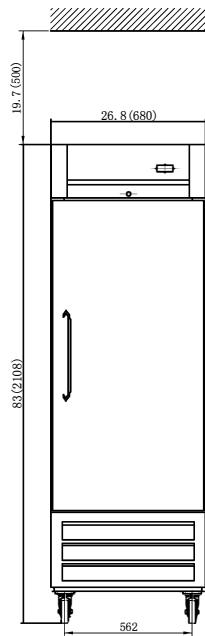

**Front**

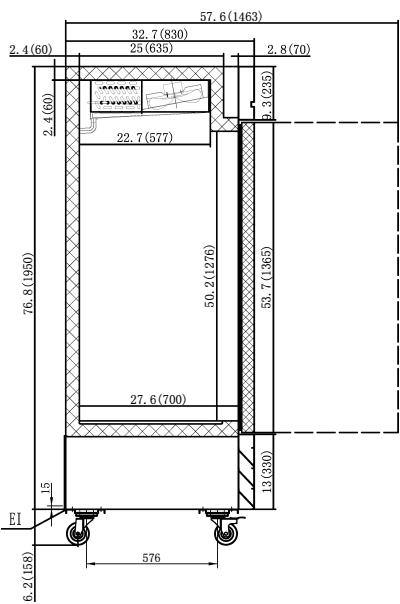

**Side**

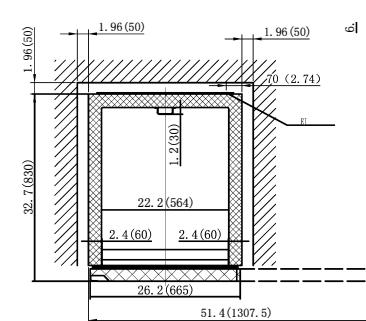

**Top**

**E1** = Electrical connection

## Electric

**Supply voltage:** 115 V/1 ph/60 Hz  
**Electrical power, max:** 0.83 kW  
**Plug type:** USA NEMA 5-15P

## Capacity:

**Gross capacity:** 21 cu.feet

## Key Information:

**Number and type of grids (included):** 3 - Vinyl-Coated steel  
**Warranty:** 3 / 5 years  
**Door hinges:** Right Side  
**External dimensions, Width:** 26 3/4" (680 mm)  
**External dimensions, Depth:** 32 11/16" (830 mm)  
**External dimensions, Height:** 83 " (2108 mm)  
**Number and type of doors:** 1 Full  
**Internal Dimensions (depth):** 27 1/2" / (698.5 mm)  
**Internal Dimensions (height):** 50 3/16" / (1275.08 mm)  
**Internal Dimensions (width):** 22 3/16" / (563.88 mm)  
**Shipping height:** 84 5/8" (2150 mm)  
**Shipping weight:** 328 lbs (149 kg)  
**Shipping volume:** 49.91 ft<sup>3</sup> (1.41 m<sup>3</sup>)  
**Type of external material:** Stainless Steel  
**Type of internal material:** 304 AISI

## Approvals

3 - Vinyl-Coated steel  
3 / 5 years  
Right Side  
26 3/4" (680 mm)  
32 11/16" (830 mm)  
83 " (2108 mm)  
1 Full  
27 1/2" / (698.5 mm)  
50 3/16" / (1275.08 mm)  
22 3/16" / (563.88 mm)  
84 5/8" (2150 mm)  
328 lbs (149 kg)  
49.91 ft<sup>3</sup> (1.41 m<sup>3</sup>)  
Stainless Steel  
304 AISI  
ENERGY STAR;ETL C&US;ETL SANITATION

## Refrigeration Data

**Condenser type:** Fin & tube  
**Operating temperature min.:** -10.01 °F  
**Compressor power:** 1 hp  
**Operating temperature max.:** 0 °F  
**Defrost type:** Auto Defrost

## Sustainability

**Current consumption:** 8 Amps  
**Refrigerant type:** R290  
**GWP Index:** 3  
**Refrigerant weight:** 110 g

**Refrigeration Equipment**  
**1-Door Full Height Freezer 27" Long**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

