



COMMERCIAL

Refrigeration Equipment 2-Door Full Height Freezer 54 " Long

ITEM #

MODEL #

NAME #

SIS #

AIA #



738245 (KCHRI54R2DFE)

2-Door Full Height Freezer 54
" Long

Short Form Specification

Item No.

2 full doors freezer with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel.

Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- shelf for 54" and 81" (left/right) reach- in PNC 880591 ☐
- shelf clips PNC 880611 ☐
- SHEET PAN RACK FITS KCHRI MODELS PNC 880622 ☐

APPROVAL:


Part of




Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

Front

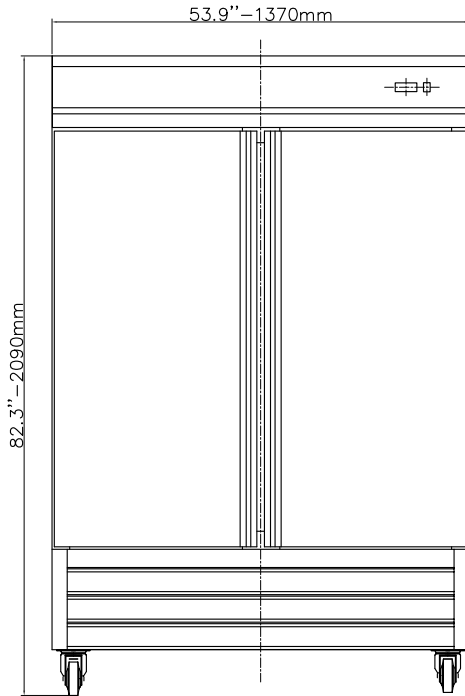

Side

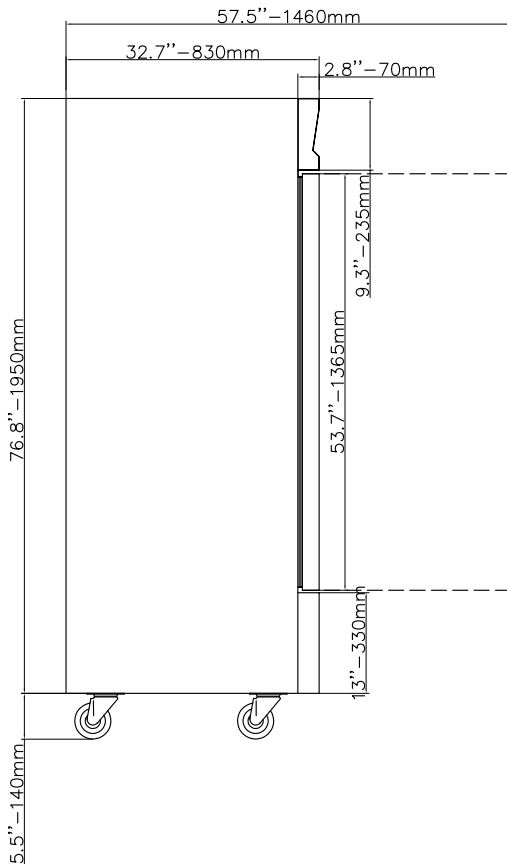

El = Electrical connection

Electric

Supply voltage:

738245 (KCHRI54R2DFE)

115 V/1 ph/60 Hz

Electrical power, max:

0.9 kW

Plug type:

USA NEMA 5-15P

Key Information:

Capacity (Cu. Ft.)

42

Door hinges:

1 Left+1 Right

External dimensions, Width:

53 15/16" (1370 mm)

External dimensions, Depth:

32 11/16" (830 mm)

External dimensions, Height:

82 1/4" (2090 mm)

Number and type of doors:

2 Full

Internal Dimensions (depth):

27 1/16"

Internal Dimensions (height):

60 1/4"

Internal Dimensions (width):

49 7/16"

Shipping height:

84 5/8" (2150 mm)

Shipping weight:

514 lbs (233 kg)

Shipping volume:

92.27 ft³ (2.61 m³)

Number and type of grids (included):

6 - Vinyl - Coated Steel

Type of external material:

430 AISI

Type of internal material:

304 AISI

Warranty:

3 / 5 years

Refrigeration Data

Compressor Horsepower:

1

Operating temperature min.:

-7.6 °F

Operating temperature max.:

-4 °F

Condenser type:

Fin & tube

Defrost type:

Auto Defrost

Sustainability

Current consumption:

9 Amps

Refrigerant type:

R290

Refrigerant weight:

150 g