

COMMERCIAL

Refrigeration Equipment 3-Door Full Height Freezer 81 " Long



738246 (KCHRI81R3DF)

3-Door Full Height Freezer 81 " Long

Short Form Specification

<u>Item No.</u>

3 full door freezer with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key.

R290 gas in the refrigeration circuit.

- ETL Safety and Sanitation certifications.
- 3/5 Years warranty.

ITEM #
MODEL #
NAME #
SIS #
AIA #

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories


- 1 ADJUSTABLE FOOT PNC 206445
- Shelf for 54" and 81" (left/right) PNC 880591 Reach-In (Solid Door)
- Middle Shelf for 81" Reach-Ins PNC 880592
- Shelf clips (4-pack) PNC 880611
- Sheet Pan Rack Fits KCHRI Models PNC 880622 🗅

APPROVAL:





Refrigeration Equipment 3-Door Full Height Freezer 81 " Long

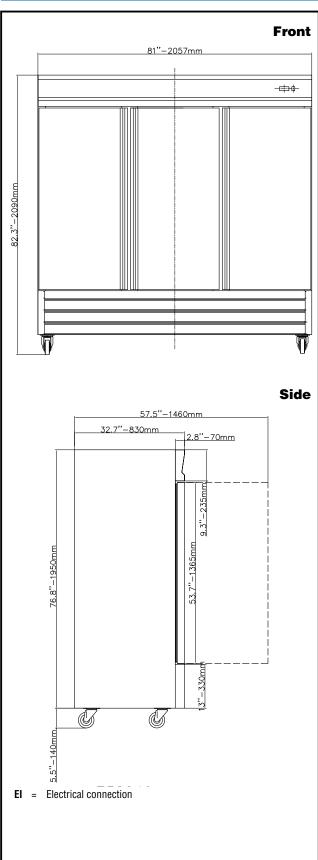

.

125/250 NEMA-L14-20P

Æb

Intertek

(E)|

Intertek

Electric

Gross capacity:72 cu.feetKey Information:Door hinges:1 Left+2 RightExternal dimensions, Width:81 " (2057 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Height:83 " (2108 mm)Number and type of doors:3 FullInternal Dimensions (depth):27 1/2" / (698.5 mm)Internal Dimensions (height):50 3/16" / (1275.08 mm)Internal Dimensions (width):76 3/8" / (1940.56 mm)Shipping height:84 5/8" (2150 mm)Shipping height:84 5/8" (2150 mm)Shipping weight:809 lbs (367 kg)Shipping volume:139.55 ft³ (3.95 m³)Number and type of grids (included):9 - Coated SteelType of external material:Stainless SteelXuper of internal material:304 AISIWarranty:3 / 5 yearsApprovalsETL C&USETL SANITATIONRefrigeration DataCompressor power:1 ½ hpOperating temperature min.:-10.01 °FOperating temperature max.:0 °FCondenser type:Fin & tubeDefrost type:Auto DefrostSustainability9 AmpsRefrigerant type:R290GWP Index:3	738246 (KCHRI81R3DF) Electrical power, max: Plug type: Capacity: Capacity: Capacity: Key Information: Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (depth): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material:	1 kW USA NEMA L14-20P 72 cu.feet 1 Left+2 Right 81 " (2057 mm) 32 11/16" (830 mm) 83 " (2108 mm) 3 Full 27 1/2" / (698.5 mm) 50 3/16" / (1275.08 mm) 76 3/8" / (1940.56 mm) 84 5/8" (2150 mm) 809 lbs (367 kg)
Key Information:Door hinges:1 Left+2 RightExternal dimensions, Width:81 " (2057 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Height:83 " (2108 mm)Summer and type of doors:3 FullInternal Dimensions (depth):27 1/2" / (698.5 mm)Internal Dimensions (height):50 3/16" / (1275.08 mm)Internal Dimensions (height):50 3/16" / (1275.08 mm)Internal Dimensions (width):76 3/8" / (1940.56 mm)Shipping height:80 lbs (367 kg)Shipping weight:809 lbs (367 kg)Shipping volume:139.55 ft³ (3.95 m³)Number and type of grids (included):9 - Coated SteelType of external material:Stainless SteelType of internal material:304 AISIApprovalsETL C&USETL SANITATIONRefrigeration DataCompressor power:1 ½ hpO °FCondenser type:Fin & tubeDefrost type:Auto DefrostSustainabilityO AmpsRefrigerant type:R290GWP Index:3	Gross capacity: Key Information: Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material:	1 Left+2 Right 81 " (2057 mm) 32 11/16" (830 mm) 83 " (2108 mm) 3 Full 27 1/2" / (698.5 mm) 50 3/16" / (1275.08 mm) 76 3/8" / (1940.56 mm) 84 5/8" (2150 mm) 809 lbs (367 kg)
Key Information:Door hinges:1 Left+2 RightExternal dimensions, Width:81 " (2057 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Height:83 " (2108 mm)Number and type of doors:3 FullInternal Dimensions (depth):27 1/2" / (698.5 mm)Internal Dimensions (depth):50 3/16" / (1275.08 mm)Internal Dimensions (height):50 3/16" / (1275.08 mm)Internal Dimensions (width):76 3/8" / (1940.56 mm)Shipping height:809 lbs (367 kg)Shipping weight:809 lbs (367 kg)Shipping volume:139.55 ft³ (3.95 m³)Number and type of grids (included):9 - Coated SteelType of external material:Stainless SteelType of internal material:304 AISIWarranty:3 / 5 yearsApprovalsETL C&USETL SANITATIONRefrigeration DataCompressor power:Compressor power:1 ½ hpOperating temperature max.:0 °FCondenser type:Fin & tubeDefrost type:Auto DefrostSustainability9 AmpsRefrigerant type:R290GWP Index:3	Key Information: Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material:	1 Left+2 Right 81 " (2057 mm) 32 11/16" (830 mm) 83 " (2108 mm) 3 Full 27 1/2" / (698.5 mm) 50 3/16" / (1275.08 mm) 76 3/8" / (1940.56 mm) 84 5/8" (2150 mm) 809 lbs (367 kg)
Door hinges:1 Left+2 RightExternal dimensions, Width:81 " (2057 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Height:83 " (2108 mm)Number and type of doors:3 FullInternal Dimensions (depth):27 1/2" / (698.5 mm)Internal Dimensions (height):50 3/16" / (1275.08 mm)Internal Dimensions (width):76 3/8" / (1940.56 mm)Shipping height:84 5/8" (2150 mm)Shipping weight:809 lbs (367 kg)Shipping volume:139.55 ft³ (3.95 m³)Number and type of grids (included):9 - Coated SteelType of external material:Stainless SteelType of internal material:3/ 5 yearsApprovalsETL C&USETL SANITATIONRefrigeration Data0 °FCongressor power:1 ½ hpOperating temperature min.:-10.01 °FOperating temperature max.:0 °FCondenser type:Fin & tubeDefrost type:Auto DefrostSustainability9 AmpsCurrent consumption:9 AmpsRefrigerant type:R290GWP Index:3	Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material:	81 " (2057 mm) 32 11/16" (830 mm) 83 " (2108 mm) 3 Full 27 1/2" / (698.5 mm) 50 3/16" / (1275.08 mm) 76 3/8" / (1940.56 mm) 84 5/8" (2150 mm) 809 lbs (367 kg)
External dimensions, Width:81 " (2057 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Height:83 " (2108 mm)Number and type of doors:3 FullInternal Dimensions (depth):27 1/2" / (698.5 mm)Internal Dimensions (height):50 3/16" / (1275.08 mm)Internal Dimensions (width):76 3/8" / (1940.56 mm)Shipping height:84 5/8" (2150 mm)Shipping weight:809 lbs (367 kg)Shipping volume:139.55 ft³ (3.95 m³)Number and type of grids (included):9 - Coated SteelType of external material:304 AISIWarranty:3 / 5 yearsApprovalsETL C&USETL SANITATIONRefrigeration Data1½ hpOperating temperature min.:-10.01 °FOperating temperature max.:0 °FCondenser type:Fin & tubeDefrost type:Auto DefrostSustainability9 AmpsRefrigerant type:9 AmpsRefrigerant type:3 3	External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material:	81 " (2057 mm) 32 11/16" (830 mm) 83 " (2108 mm) 3 Full 27 1/2" / (698.5 mm) 50 3/16" / (1275.08 mm) 76 3/8" / (1940.56 mm) 84 5/8" (2150 mm) 809 lbs (367 kg)
Refrigeration Data Compressor power: 1 ½ hp Operating temperature min.: -10.01 °F Operating temperature max.: 0 °F Condenser type: Fin & tube Defrost type: Auto Defrost Sustainability 9 Amps Refrigerant type: R290 GWP Index: 3	-	9 - Coated Steel Stainless Steel 304 AISI 3 / 5 years
Compressor power:1 ½ hpOperating temperature min.:-10.01 °FOperating temperature max.:0 °FCondenser type:Fin & tubeDefrost type:Auto DefrostSustainability9 AmpsRefrigerant type:9 AmpsGWP Index:3		ETL C&USETL SANITATION
Current consumption:9 AmpsRefrigerant type:R290GWP Index:3	Compressor power: Operating temperature min.: Operating temperature max.: Condenser type:	-10.01 °F 0 °F Fin & tube
Refrigerant type:R290GWP Index:3	Sustainability	
	Refrigerant type: GWP Index:	R290 3

The company

Refrigeration Equipment 3-Door Full Height Freezer 81" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.