

COMMERCIAL

Refrigeration Equipment 1-Hinged Glass Door Full Height Merchandiser Refrigerator 25" Long



TEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- · Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Lockable door.
- Electronic control to select temperatures.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- PNC 880611 🛛
- Shelf for 12" Merchandiser (Glass PNC 880619 Door)

APPROVAL:

Part of

Kelvinator Commercial www.kelvinatorcommercial.com

• Shelf clips (4-pack)



Refrigeration Equipment 1-Hinged Glass Door Full Height Merchandiser Refrigerator 25" Long

115 V/1 ph/60 Hz

USA NEMA 5-15P

0.31 kW

12 cu.feet

3 - 458x503

Right Side

1 Glass

25 " (635 mm) 26 " (660 mm)

65 15/16" (1674 mm)

39 "/(990.6 mm)

247 lbs (112 kg) 30.57 ft³ (0.87 m³)

3 / 5 years

1/5 hp 32 °F

41 °F

Fin & tube Auto Defrost

3 Amps

R290

85 g

3

20 3/8" / (518.16 mm)


68 11/16" (1745 mm)

Black Prepainted Steel

White Prepainted Aluminium

ETL C&US; ETL SANITATION

21 11/16" / (551.18 mm)

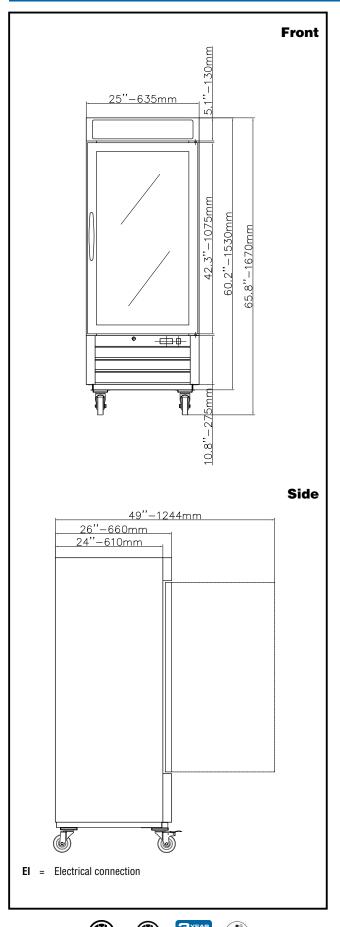

Capacity: Gross capacity: Number and type of grids (included): Key Information:

Electric

Plug type:

Supply voltage:

738247 (KCHGM12R)

Electrical power, max:

Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material: Warranty: Approvals

Refrigeration Data

Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type:

Sustainability

Current consumption: Refrigerant type: GWP Index: Refrigerant weight:



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.

15A 125V

Interte