

COMMERCIAL

Refrigeration Equipment 1-Hinged Glass Door Full Height Merchandiser Refrigerator 28.5 " Long



Short Form Specification

Item No.

1-glass door refrigerator with exterior back panel, bottom panel, and top panel in galvanized steel, exterior side panels in painted steel; interior back, side, and top panels in painted aluminum, and internal bottom panel in 304 stainless steel. Durable and easy to clean for daily commercial use. Control with cabinet temperature display. Self-closing door feature lock and key.

Electronic control.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Lockable door.
- Electronic control to select temperatures.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- Shelf for 26" Merchandiser PNC 880593 (Glass Door) PNC 880593
- Shelf clips (4-pack) PNC 880611 🗆


APPROVAL:



Kelvinator Commercial www.kelvinatorcommercial.com



Refrigeration Equipment 1-Hinged Glass Door Full Height Merchandiser Refrigerator 28.5" Long

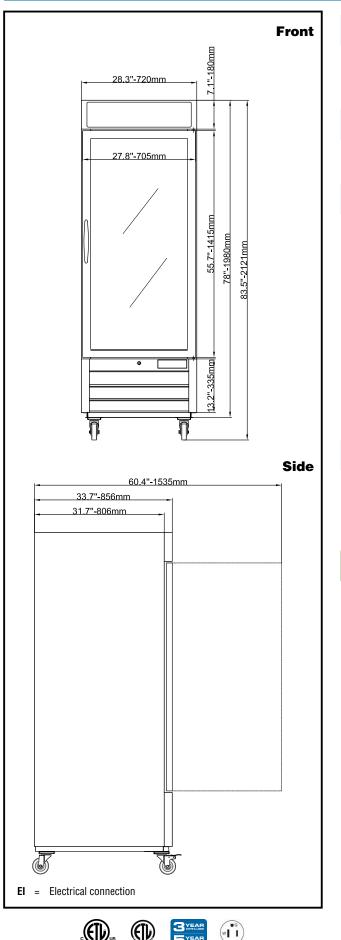

Intertek

Intertek

15A 125V NEMA 5-15P

Electric

Supply voltage: 738248 (KCHGM26R) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.31 kW USA NEMA 5-15P
Capacity:	
Gross capacity: Number and type of grids (included):	23 cu.feet 4 - 588x664
Key Information:	
Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Type of external material: Type of internal material: Warranty: Approvals	Right Side 28 3/8" (720 mm) 33 11/16" (856 mm) 83 11/16" (2126 mm) 1 Glass 29 3/8" / (746.76 mm) 52 3/8" / (1330.96 mm) 23 13/16" / (604.52 mm) 85 13/16" (2180 mm) 377 lbs (171 kg) Black Prepainted Steel White Prepainted Aluminium 3 / 5 years ETL C&USETL SANITATION

Refrigeration Data

Compressor power:	1/5 hp
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost
Our a baile a bailithea	

Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	85 g

Refrigeration Equipment 1-Hinged Glass Door Full Height Merchandiser Refrigerator 28.5" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.