



COMMERCIAL

## Refrigeration Equipment 1-Door Full Height Reach In Back Room Refrigerator 31" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738251 (KCHRI25R1DRE)

1-Door Full Height Reach In  
Back Room Refrigerator 31  
" Long

### Short Form Specification

Item No. \_\_\_\_\_

1 full door refrigerator with door and bottom panel in 430 stainless steel, exterior back, side and top panels in prepainted steel; interior back, side, top and bottom panels in white High Impact Polystyrene. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key. Temperature range: 32 °F min / 46 °F max.

R290 gas in the refrigeration circuit.  
ETL Safety and Sanitation certifications.  
3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- PVC shelves.

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

### Optional Accessories

- shelf clips PNC 880611

APPROVAL: \_\_\_\_\_


Part of




Electrolux  
Professional  
Group

**Kelvinator Commercial**  
www.kelvinatorcommercial.com

**Front**

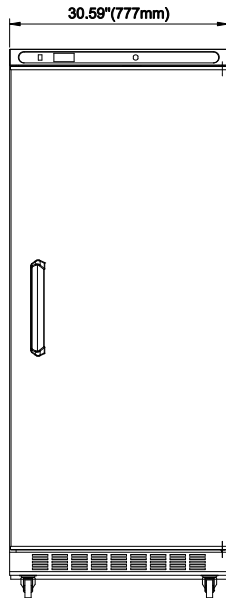


**Side**

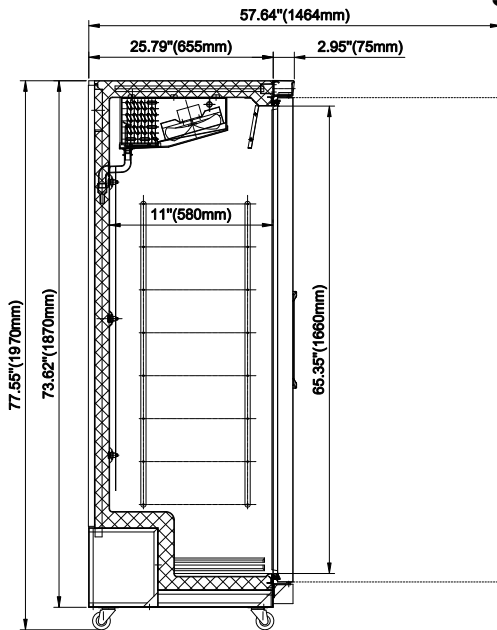

EI = Electrical connection

**Top**



## Electric

Supply voltage:

738251 (KCHRI25R1DRE)

115 V/1 ph/60 Hz

Plug type:

USA NEMA 5-15P

## Key Information:

Door hinges:	Right Side
Capacity (Cu. Ft.)	25
External dimensions, Width:	30 9/16" (776.99 mm)
External dimensions, Depth:	28 3/4" (730 mm)
External dimensions, Height:	77 9/16" (1970 mm)
Number and type of doors:	1 ; Full
Internal Dimensions (depth):	22 3/4"
Internal Dimensions (height):	65 3/8"
Internal Dimensions (width):	26 3/8"
Shipping height:	82 11/16" (2100 mm)
Shipping weight:	267 lbs (121 kg)
Shipping volume:	47.95 ft <sup>3</sup> (1.36 m <sup>3</sup> )
Number and type of grids (included):	3 - Vinyl-Coated steel
Type of external material:	Prepainted Steel
Type of internal material:	White Polystyrene
External Door material:	430 AISI
Warranty:	3 / 5 years

## Refrigeration Data

Compressor Horsepower:	1/6
Operating temperature min.:	ISO 9001 °F
Operating temperature max.:	46.4 °F
Condenser type:	Fin & tube
Defrost type:	auto defrost

## Sustainability

Current consumption:	4 Amps
Refrigerant type:	;R290