

## Refrigeration Equipment 1-Door Pizza Prep Table 48 " Long 6-1/3 Pan

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738252 (KCHPT50.6)

1-Door Pizza Prep Table 48  
" Long 6-1/3 Pan

### Short Form Specification

**Item No.** \_\_\_\_\_

1-door pizza refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 47.3x17.7x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing door with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

### Construction

- Holds 6 1/3 pans.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories

- Drawer Kit for KCHPT50.6 PNC 880694   
(738252) Pizza Table

APPROVAL: \_\_\_\_\_

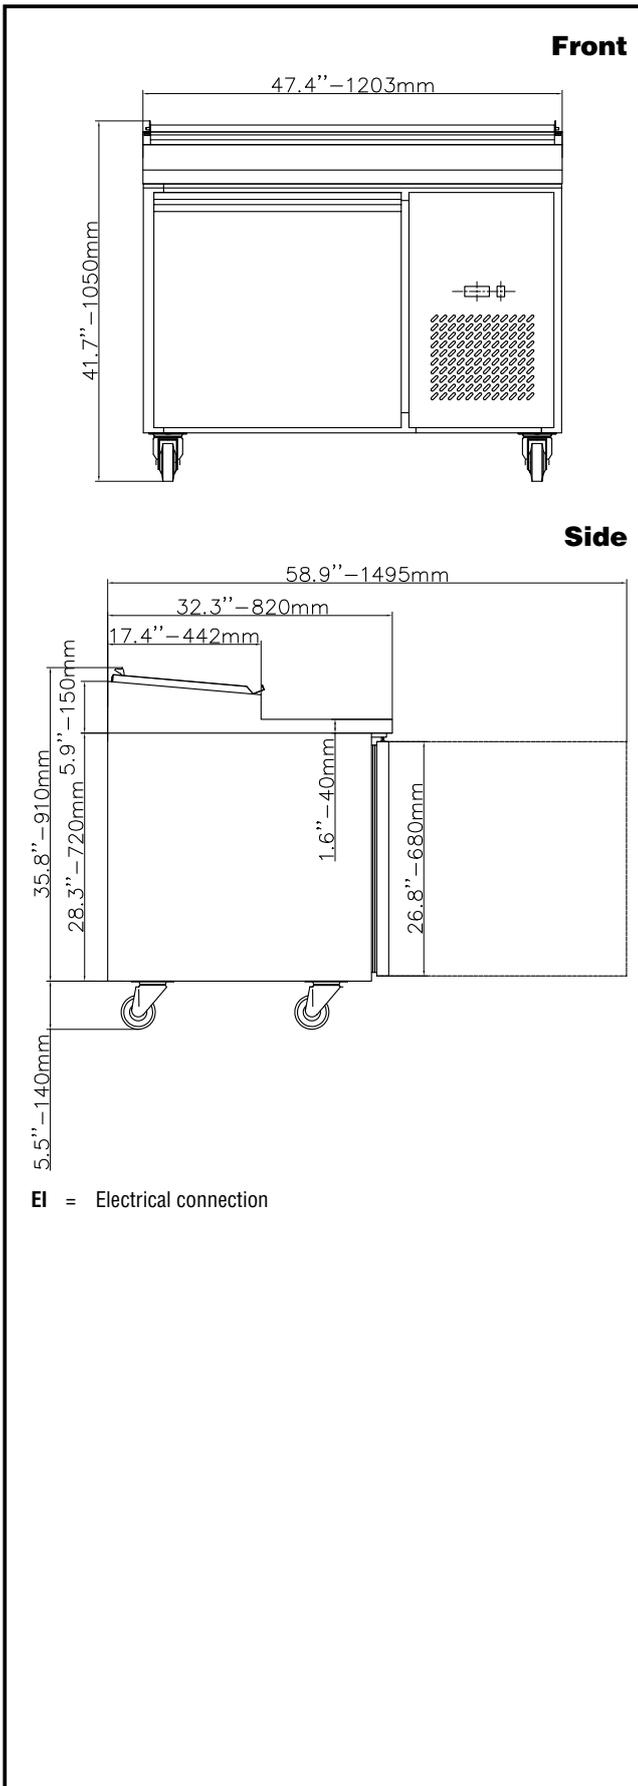

## Electric

|                        |                  |
|------------------------|------------------|
| Supply voltage:        | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.72 kW          |
| Plug type:             | NEMA 5-15        |

## Capacity:

|                                      |             |
|--------------------------------------|-------------|
| Number and type of grids (included): | 1 - 638x634 |
| Gross capacity:                      | 12 cu.feet  |

## Key Information:

|                               |  |
|-------------------------------|--|
| Warranty:                     | 3 / 5 years                                  |
| Door hinges:                  | Left   |
| External dimensions, Width:   | 47 3/8" (1203 mm)                            |
| External dimensions, Depth:   | 32 1/4" (820 mm)                             |
| External dimensions, Height:  | 41 5/16" (1050 mm)                           |
| Number and type of doors:     | 1 Full                                       |
| Internal Dimensions (depth):  | 27 1/2" / (698.5 mm)                         |
| Internal Dimensions (height): | 23 " / (584.2 mm)                            |
| Internal Dimensions (width):  | 25 1/2" / (647.7 mm)                         |
| Shipping height:              | 44 1/2" (1130 mm)                            |
| Shipping weight:              | 291 lbs (132 kg)                             |
| Shipping volume:              | 43.24 ft <sup>3</sup> (1.22 m <sup>3</sup> ) |
| Type of external material:    | Stainless Steel                              |
| Type of internal material:    | 304 AISI                                     |
| Approvals                     | ETL C&US;ETL SANITATION                      |

## Refrigeration Data

|                             |              |
|-----------------------------|--------------|
| Condenser type:             | Fin & tube   |
| Operating temperature min.: | 32 °F        |
| Compressor power:           | 1/3 hp       |
| Operating temperature max.: | 41 °F        |
| Defrost type:               | Auto Defrost |

## Sustainability

|                      |        |
|----------------------|--------|
| Current consumption: | 5 Amps |
| Refrigerant type:    | R290   |
| GWP Index:           | 3      |
| Refrigerant weight:  | 105 g  |

