

Refrigeration Equipment 2-Door Pizza Prep Table 71 " Long 9-1/3 Pan

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738253 (KCHPT72.9)

2-Door Pizza Prep Table 71
" Long 9-1/3 Pan

Short Form Specification

Item No. _____

2-door pizza refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 70.79 x17.7x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing door with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 9 1/3 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- Drawer Kit for KCHPT72.9 PNC 880695
(738253) Pizza Table

APPROVAL: _____

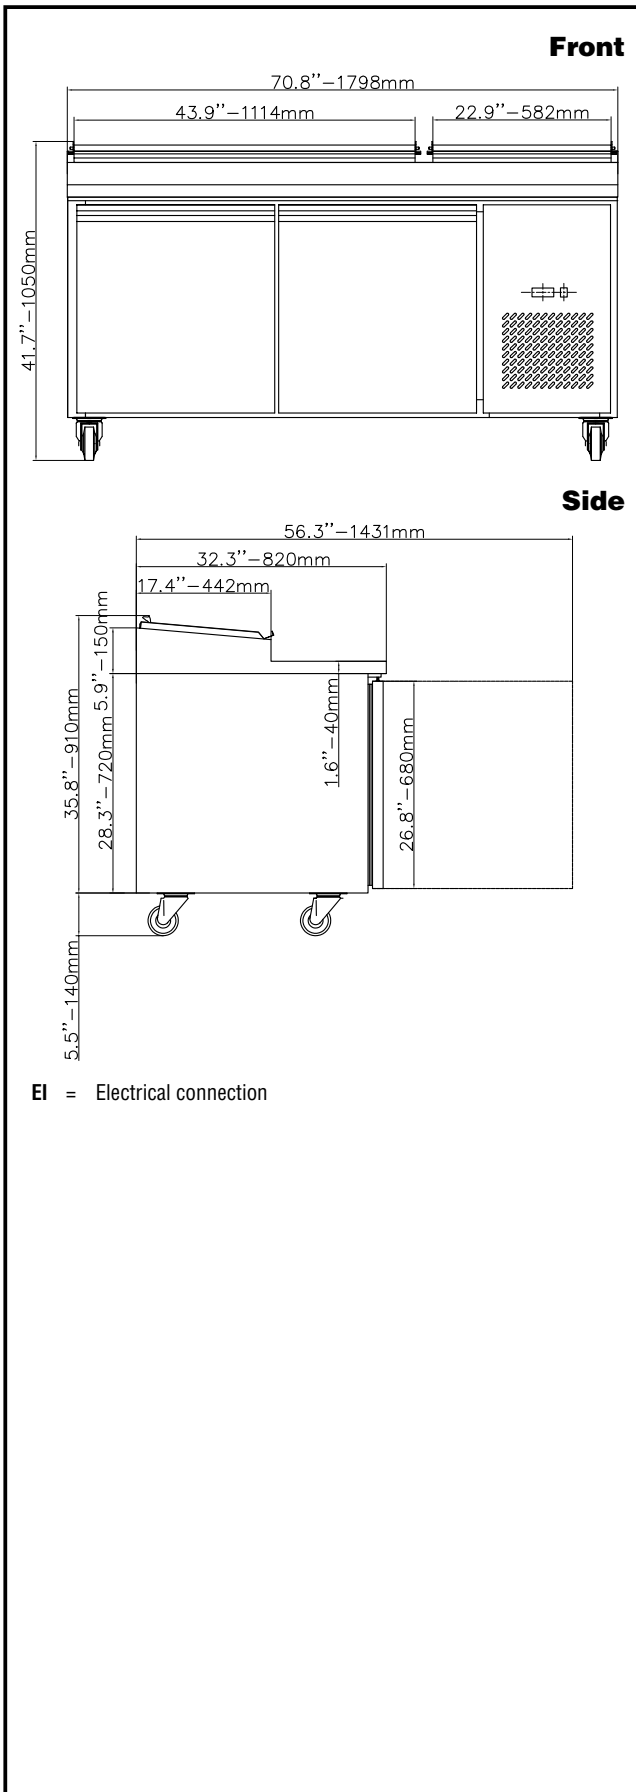

Electric

| | | |
|------------------------|--------------------|------------------|
| Supply voltage: | 738253 (KCHPT72.9) | 115 V/1 ph/60 Hz |
| Electrical power, max: | | 0.78 kW |
| Plug type: | | NEMA 5-15 |

Capacity:

| | |
|--------------------------------------|-------------|
| Gross capacity: | 22 cu.feet |
| Number and type of grids (included): | 2 - 611x634 |

Key Information:

| | |
|-------------------------------|---|
| Door hinges: | 1 Left+1 Right |
| External dimensions, Width: | 70 13/16" (1798 mm) |
| External dimensions, Depth: | 32 1/4" (820 mm) |
| External dimensions, Height: | 41 5/16" (1050 mm) |
| Number and type of doors: | 2 Full |
| Internal Dimensions (depth): | 27 1/2" / (698.5 mm) |
| Internal Dimensions (height): | 23 " / (584.2 mm) |
| Internal Dimensions (width): | 49 " / (1244.6 mm) |
| Shipping height: | 44 1/2" (1130 mm) |
| Shipping weight: | 397 lbs (180 kg) |
| Shipping volume: | 63.65 ft ³ (1.8 m ³) |
| Type of external material: | Stainless Steel |
| Type of internal material: | 304 AISI |
| Warranty: | 3 / 5 years |
| Approvals | ETL C&US;ETL SANITATION |

Refrigeration Data

| | |
|-----------------------------|--------------|
| Compressor power: | 1/3 hp |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Auto Defrost |

Sustainability

| | |
|----------------------|--------|
| Current consumption: | 5 Amps |
| Refrigerant type: | R290 |
| GWP Index: | 3 |
| Refrigerant weight: | 105 g |

