

## Refrigeration Equipment 2-Door Pizza Prep Table 71 " Long 9-1/3 Pan

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738253 (KCHPT72.9)

2-Door Pizza Prep Table 71  
" Long 9-1/3 Pan

### Short Form Specification

#### Item No.

2-door pizza refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 70.79 x 17.7 x 0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing door with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

### Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 9 1/3 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories

- Drawer Kit for KCHPT72.9 PNC 880695 ☐  
(738253) Pizza Table

APPROVAL: \_\_\_\_\_

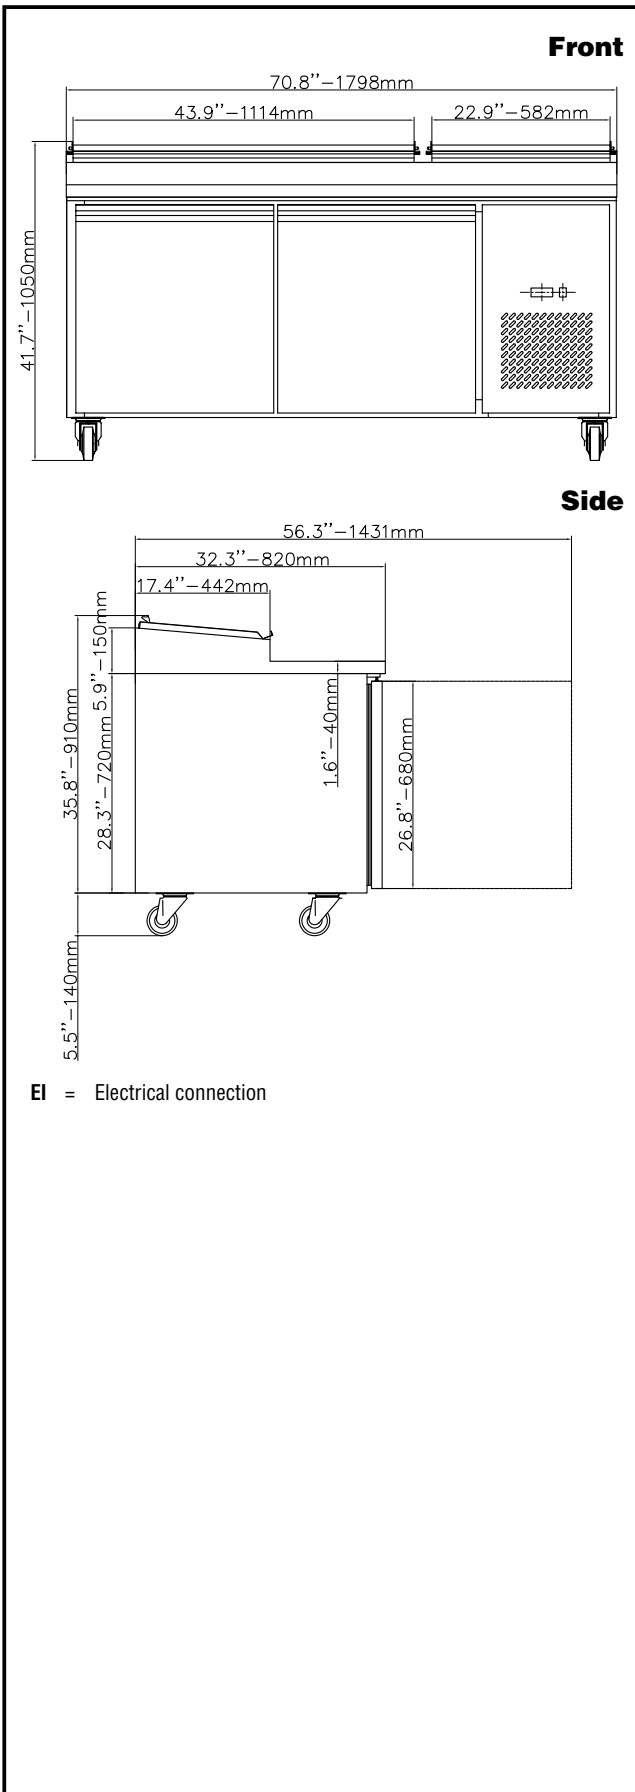

### Electric

Supply voltage:	115 V/1 ph/60 Hz
738253 (KCHPT72.9)	
Electrical power, max:	0.78 kW
Plug type:	NEMA 5-15

### Capacity:

Gross capacity:	22 cu.feet
Number and type of grids (included):	2 - 611x634

### Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Width:	70 13/16" (1798 mm)
External dimensions, Depth:	32 1/4" (820 mm)
External dimensions, Height:	41 5/16" (1050 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	27 1/2" / (698.5 mm)
Internal Dimensions (height):	23 " / (584.2 mm)
Internal Dimensions (width):	49 " / (1244.6 mm)
Shipping height:	44 1/2" (1130 mm)
Shipping weight:	397 lbs (180 kg)
Shipping volume:	63.65 ft <sup>3</sup> (1.8 m <sup>3</sup> )
Type of external material:	Stainless Steel
Type of internal material:	304 AISI
Warranty:	3 / 5 years
Approvals	ETL C&US;ETL SANITATION

### Refrigeration Data

Compressor power:	1/3 hp
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

### Sustainability

Current consumption:	5 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	105 g