

Refrigeration Equipment
3-Door Pizza Prep Table 94
" Long 12-1/3 Pan



738254 (KCHPT92.12) 3-Door Pizza Prep Table 94
" Long 12-1/3 Pan

Short Form Specification

Item No.

3-door pizza refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 91.81 x17.7x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing door with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Side-mounted refrigeration system improves airflow, reduces heat buildup behind the unit, and allows easy service access
- Integrated polyethylene (PE) cutting board included for food-safe, durable prep surface

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Holds 12 1/3 pans.
- Insulated lid maintains food freshness.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Self-closing door with 90-degree stay-open feature.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 58 mm insulation for energy saving

Optional Accessories


- Drawer Kit for KCHPT92.12 (738254) PNC 880696
- Pizza Table for Left or Right Section
- Drawer Kit for KCHPT92.12 (738254) PNC 880697
- Pizza Table for Center Section

APPROVAL:

Part of



Kelvinator Commercial
www.kelvinatorcommercial.com

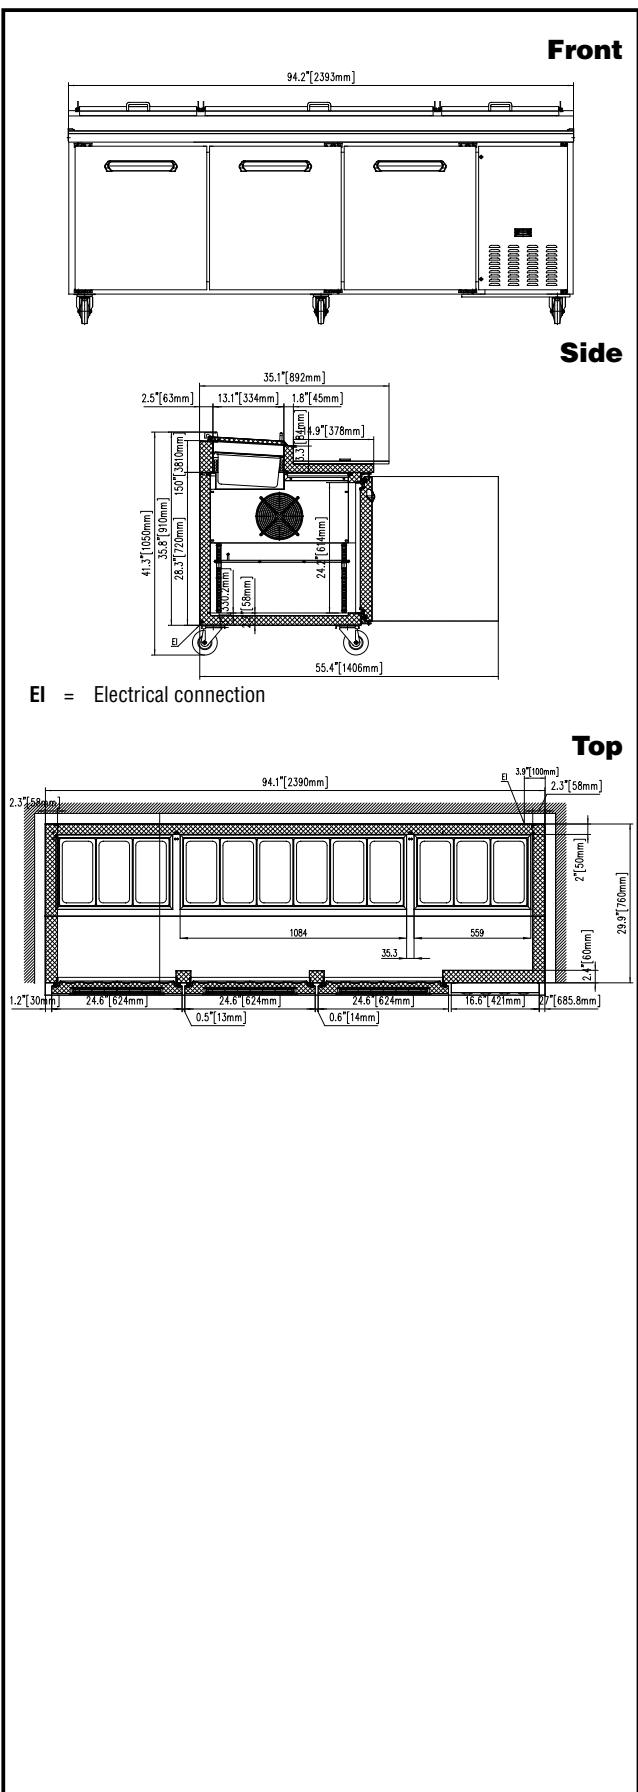

Electric

Supply voltage: 115 V/1 ph/60 Hz
Electrical power, max: 0.93 kW
Plug type: NEMA 5-15

Capacity

Gross capacity: 32 cu.feet

Key Information:

Number and type of grids (included): 3 - Vinyl-Coated steel
Number and type of pans (included): 12 - Plastic
Number and type of cutting board (included): 1 - Polyethylene (PE)
Warranty: 3 / 5 years
Door hinges: 1 Left+2 Right
External dimensions, Width: 94 3/16" (2393 mm)
External dimensions, Depth: 32 1/4" (820 mm)
External dimensions, Height: 41 5/16" (1050 mm)
Number and type of doors: 3 Full
Internal Dimensions (depth): 27 1/2" / (698.5 mm)
Internal Dimensions (height): 23 " / (584.2 mm)
Internal Dimensions (width): 72 1/2" / (1841.5 mm)
Shipping height: 44 1/2" (1130 mm)
Shipping weight: 551 lbs (250 kg)
Shipping volume: 84.07 ft³ (2.38 m³)
Type of external material: Stainless Steel
Type of internal material: 304 AISI
Approvals: ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type: Fin & tube
Operating temperature min.: 32 °F
Compressor power: 1/2 hp
Operating temperature max.: 41 °F
Defrost type: Auto Defrost

Sustainability

Current consumption: 5.5 Amps
Refrigerant type: R290
GWP Index: 3
Refrigerant weight: 105 g

