



## Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 48" Long 12-1/6 Pan



738256 (KCHST48.12)

2-Door Sandwich/Salad Prep  
Table 48" Long 12-1/6 Pan

### Short Form Specification

#### Item No.

2-door sandwich/salad refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 48x11.4x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Integrated polyethylene (PE) cutting board included for food-safe, durable prep surface

### Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- White polystyrene interior side panels, for high impact resistance
- Holds 12 1/6 pans.
- Insulated lid maintains food freshness.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- 58 mm insulation for energy saving

### Optional Accessories


- Drawer Kit for 48" Mega Top, Salad Top, Undercounter and L/R section of 70" Salad & Mega Top and 72" Undercounter PNC 880616

### APPROVAL:


Part of



**Kelvinator Commercial**  
[www.kelvinatorcommercial.com](http://www.kelvinatorcommercial.com)

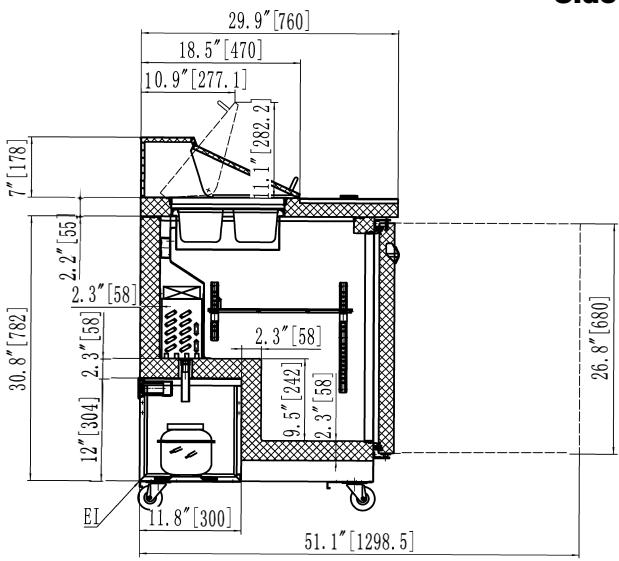

**EI** = Electrical connection

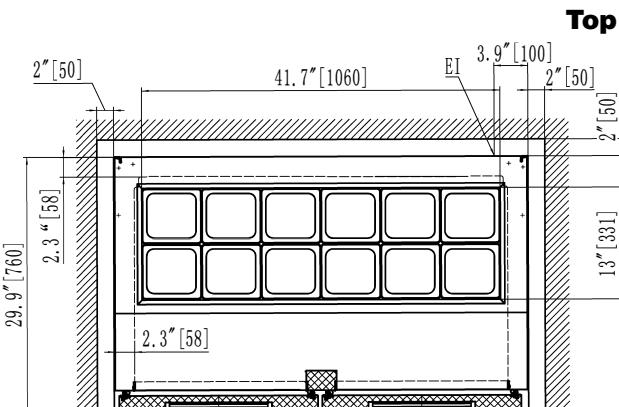

## Electric

**Supply voltage:** 115 V/1 ph/60 Hz  
**Electrical power, max:** 0.72 kW  
**Plug type:** USA NEMA 5-15P

## Capacity:

**Gross capacity:** 12 cu.feet

## Key Information:

**Number and type of grids (included):** 2 - Vinyl-Coated steel  
**Number and type of pans (included):** 12 - Plastic  
**Number and type of cutting board (included):** 1 - Polyethylene (PE)  
**Warranty:** 3 / 5 years  
**Door hinges:** 1 Left+1 Right  
**External dimensions, Width:** 48 1/4" (1225 mm)  
**External dimensions, Depth:** 29 15/16" (760 mm)  
**External dimensions, Height:** 43 5/16" (1100 mm)  
**Number and type of doors:** 2 Full  
**Internal Dimensions (depth):** 23 13/16" / (605 mm)  
**Internal Dimensions (height):** 23 1/2" / (597 mm)  
**Internal Dimensions (width):** 42 13/16" / (1088 mm)  
**Shipping height:** 47 1/4" (1200 mm)  
**Shipping weight:** 333 lbs (151 kg)  
**Shipping volume:** 42.88 ft<sup>3</sup> (1.21 m<sup>3</sup>)  
**Type of external material:** Stainless Steel  
**Type of internal material:** Polystyrene  
**Approvals:** ETL C&US;ETL SANITATION

## Refrigeration Data

**Condenser type:** Fin & tube  
**Operating temperature min.:** 32 °F  
**Compressor power:** 1/3 hp  
**Operating temperature max.:** 41 °F  
**Defrost type:** Auto Defrost

## Sustainability

**Current consumption:** 4.3 Amps  
**Refrigerant type:** R290  
**GWP Index:** 3  
**Refrigerant weight:** 90 g