

COMMERCIAL

### Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 61" Long 16-1/6 Pan



738257 (KCHST60.16)

2-Door Sandwich/Salad Prep Table 61" Long 16-1/6 Pan

# **Short Form Specification**

#### Item No.

2-door sandwich/salad refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 61x11.4x0.5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door

gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

## **Main Features**

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- · Heavy duty Vinyl coated steel shelves.
- · Heavy duty Vinyl coated steel shelves.

# Construction

- · Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 16 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### **Sustainability**

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.

# **Optional Accessories**

• Drawer Kit for 60" Mega Top & PNC 880617 Undercounter

**APPROVAL:** 

Part of



43.3"[1100]

# Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 61" Long 16-1/6 Pan




Front

61.2 "[1555]

115 V/1 ph/60 Hz
0.78 kW
USA NEMA 5-15P
15.5 cu.feet
Vinyl-Coated steel
3 / 5 years
1 Left+1 Right
61 1/4" (1555 mm)
29 15/16" (760 mm)
43 5/16" (1100 mm)
2 Full
23 13/16" / (605 mm)
23 1/2" / (597 mm)
56 1/4" / (1429 mm)
47 1/4" (1200 mm)
392 lbs (178 kg)
54.07 ft <sup>3</sup> (1.53 m <sup>3</sup> )
Stainless Steel
Polystyrene
ETL C&USETL SANITATION

# **Refrigeration Data**

Current absorbed:	
738257 (KCHST60.16)	4.3 Amps
Condenser type:	Fin & tube
Operating temperature min.:	32 °F
Compressor power:	1/3 hp
Operating temperature max.:	41 °F
Defrost type:	Auto Defrost
Sustainability	
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	90 g

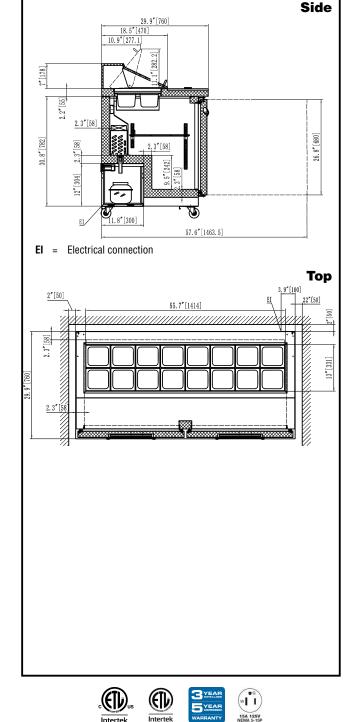

Intertek

Intertek

Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 61" Long 16-1/6 Pan

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.