

## Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 61" Long 16-1/6 Pan

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738257 (KCHST60.16)

2-Door Sandwich/Salad Prep  
Table 61" Long 16-1/6 Pan

### Short Form Specification

#### Item No.

2-door sandwich/salad refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 61x11.4x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- Heavy duty Vinyl coated steel shelves.

### Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 16 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories

- Drawer Kit for 60" Mega Top & Undercounter PNC 880617 ☐

APPROVAL: \_\_\_\_\_

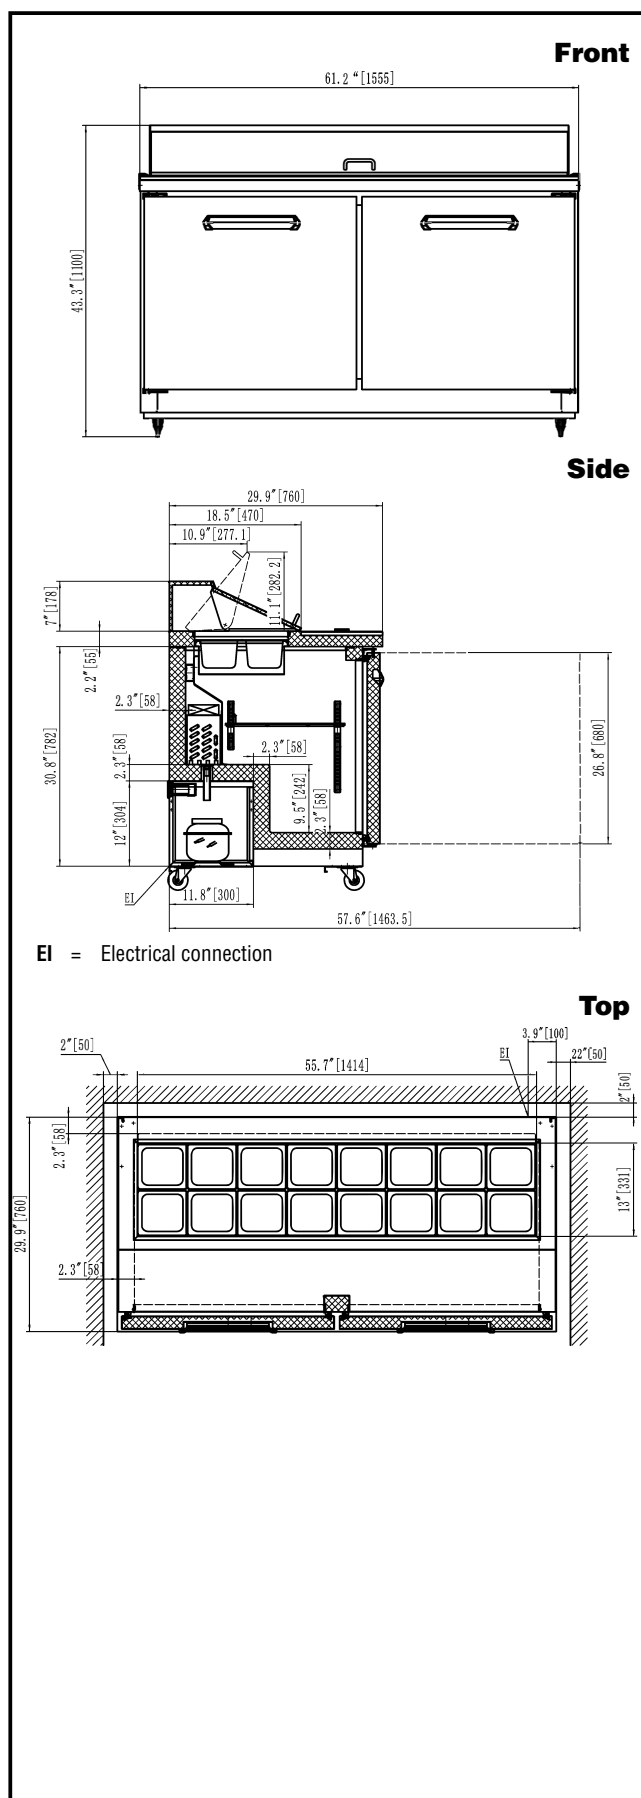

## Electric

|                               |                  |
|-------------------------------|------------------|
| <b>Supply voltage:</b>        | 115 V/1 ph/60 Hz |
| <b>Electrical power, max:</b> | 0.78 kW          |
| <b>Plug type:</b>             | USA NEMA 5-15P   |

### Capacity:

**Gross capacity:** 15.5 cu.feet

### Key Information:

|                               |                         |
|-------------------------------|-------------------------|
| Type of grids (included):     | Vinyl-Coated steel      |
| Warranty:                     | 3 / 5 years             |
| Door hinges:                  | 1 Left+1 Right          |
| External dimensions, Width:   | 61 1/4" (1555 mm)       |
| External dimensions, Depth:   | 29 15/16" (760 mm)      |
| External dimensions, Height:  | 43 5/16" (1100 mm)      |
| Number and type of doors:     | 2 Full                  |
| Internal Dimensions (depth):  | 23 13/16" / (605 mm)    |
| Internal Dimensions (height): | 23 1/2" / (597 mm)      |
| Internal Dimensions (width):  | 56 1/4" / (1429 mm)     |
| Shipping height:              | 47 1/4" (1200 mm)       |
| Shipping weight:              | 392 lbs (178 kg)        |
| Shipping volume:              | 54.07 ft³ (1.53 m³)     |
| Type of external material:    | Stainless Steel         |
| Type of internal material:    | Polystyrene             |
| Approvals                     | ETL C&US;ETL SANITATION |

## Refrigeration Data

|                                    |              |
|------------------------------------|--------------|
| <b>Current absorbed:</b>           |              |
| <b>738257 (KCHST60.16)</b>         | 4.3 Amps     |
| <b>Condenser type:</b>             | Fin & tube   |
| <b>Operating temperature min.:</b> | 32 °F        |
| <b>Compressor power:</b>           | 1/3 hp       |
| <b>Operating temperature max.:</b> | 41 °F        |
| <b>Defrost type:</b>               | Auto Defrost |

## Sustainability

|                     |      |
|---------------------|------|
| Refrigerant type:   | R290 |
| GWP Index:          | 3    |
| Refrigerant weight: | 90 g |

