



Refrigeration Equipment 3-Door Sandwich/Salad Prep Table 72" Long 18-1/6 Pan



738258 (KCHST70.18)

3-Door Sandwich/Salad Prep
Table 72" Long 18-1/6 Pan

Short Form Specification

Item No.

3-door sandwich/salad refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 71x11.4x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Integrated polyethylene (PE) cutting board included for food-safe, durable prep surface

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- White polystyrene interior side panels, for high impact resistance
- Holds 18 1/6 pans.
- Insulated lid maintains food freshness.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Self-closing door with 90-degree stay-open feature.
- Stainless steel worktop, durable functionality

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- 58 mm insulation for energy saving

Optional Accessories


- Drawers Kit for L/R section of 48" & 72" Mega Top, Salad Top, Undercounter Refrigerator, and Work Top Refrigerator PNC 880616
- Drawers Kit for Center section of 72" Mega Top, Salad Top, Undercounter Refrigerator, and Work Top Refrigerator PNC 880699

APPROVAL:

Part of



Kelvinator Commercial
www.kelvinatorcommercial.com

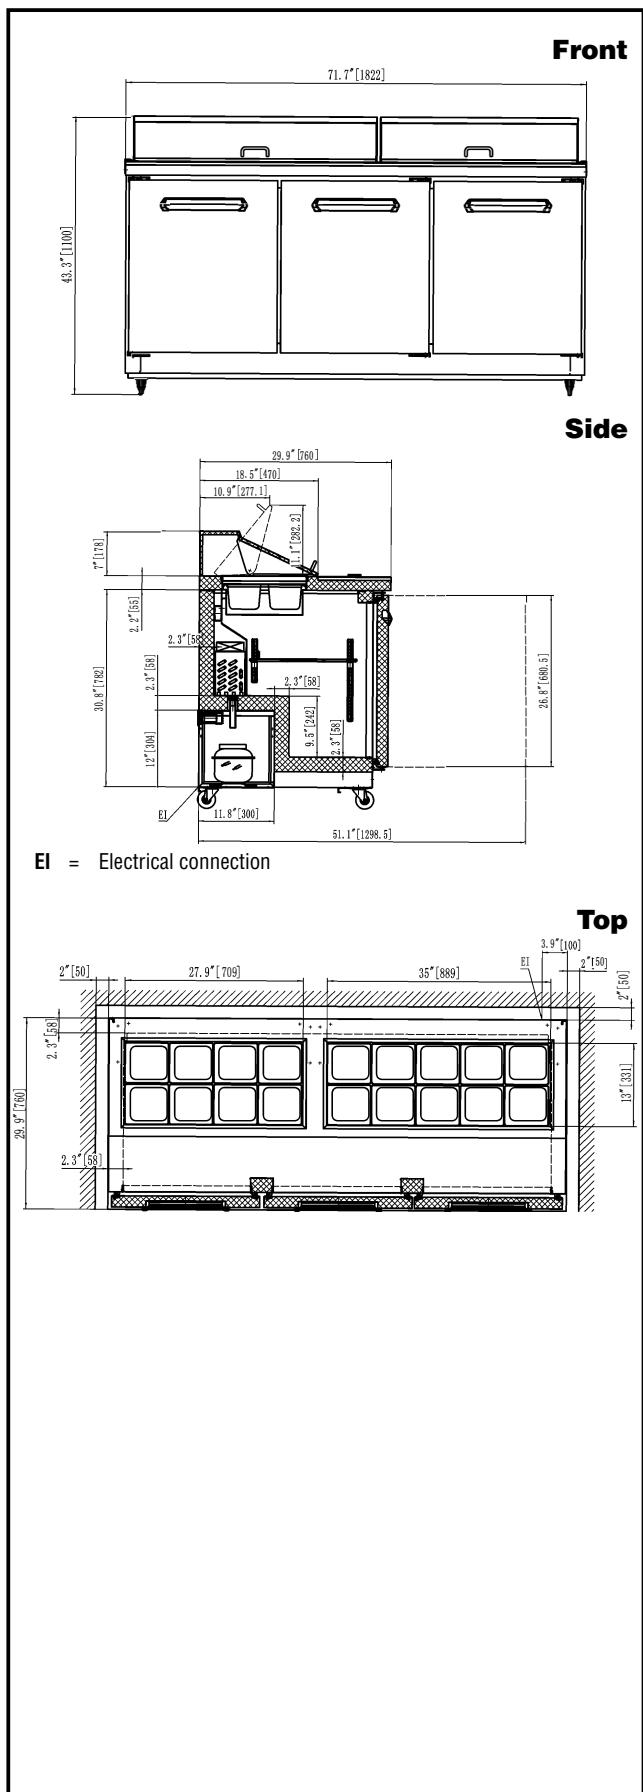

Electric

Supply voltage: 115 V/1 ph/60 Hz
Electrical power, max: 0.72 kW
Plug type: NEMA 5-15

Capacity:

Gross capacity: 18 cu.feet

Key Information:

Number and type of grids (included): 3 - Vinyl-Coated steel
Number and type of pans (included): 18 - Plastic
Number and type of cutting board (included): 1 - Polyethylene (PE)
Warranty: 3 / 5 years
Door hinges: 1 Left+2 Right
External dimensions, Width: 71 3/4" (1822 mm)
External dimensions, Depth: 29 15/16" (760 mm)
External dimensions, Height: 43 5/16" (1100 mm)
Number and type of doors: 3 Full
Internal Dimensions (depth): 23 13/16" / (605 mm)
Internal Dimensions (height): 23 1/2" / (597 mm)
Internal Dimensions (width): 66 7/16" / (1687 mm)
Shipping height: 47 1/4" (1200 mm)
Shipping weight: 443 lbs (201 kg)
Shipping volume: 63.12 ft³ (1.79 m³)
Type of external material: Stainless Steel
Type of internal material: Polystyrene
Approvals: ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type: Fin & tube
Operating temperature min.: 32 °F
Compressor power: 1/3 hp
Operating temperature max.: 41 °F
Defrost type: Auto Defrost

Sustainability

Current consumption: 4.3 Amps
Refrigerant type: R290
GWP Index: 3
Refrigerant weight: 95 g

