

## Refrigeration Equipment 2-Door Mega Top Prep 48 " Long 18-1/6 Pan

ITEM #

MODEL #

NAME #

SIS #

AIA #



738260 (KCHMT48.18)

2-Door Mega Top Prep 48  
" Long 18-1/6 Pan

### Short Form Specification

#### Item No.

2-door mega top refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 48x9x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

### Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 18 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.


### Optional Accessories

- Drawer Kit for 48" Mega Top, Salad PNC 880616 ☐ Top, Undercounter and L/R section of 70" Salad & Mega Top and 72" Undercounter

APPROVAL:

## Refrigeration Equipment

### 2-Door Mega Top Prep 48" Long 18-1/6 Pan

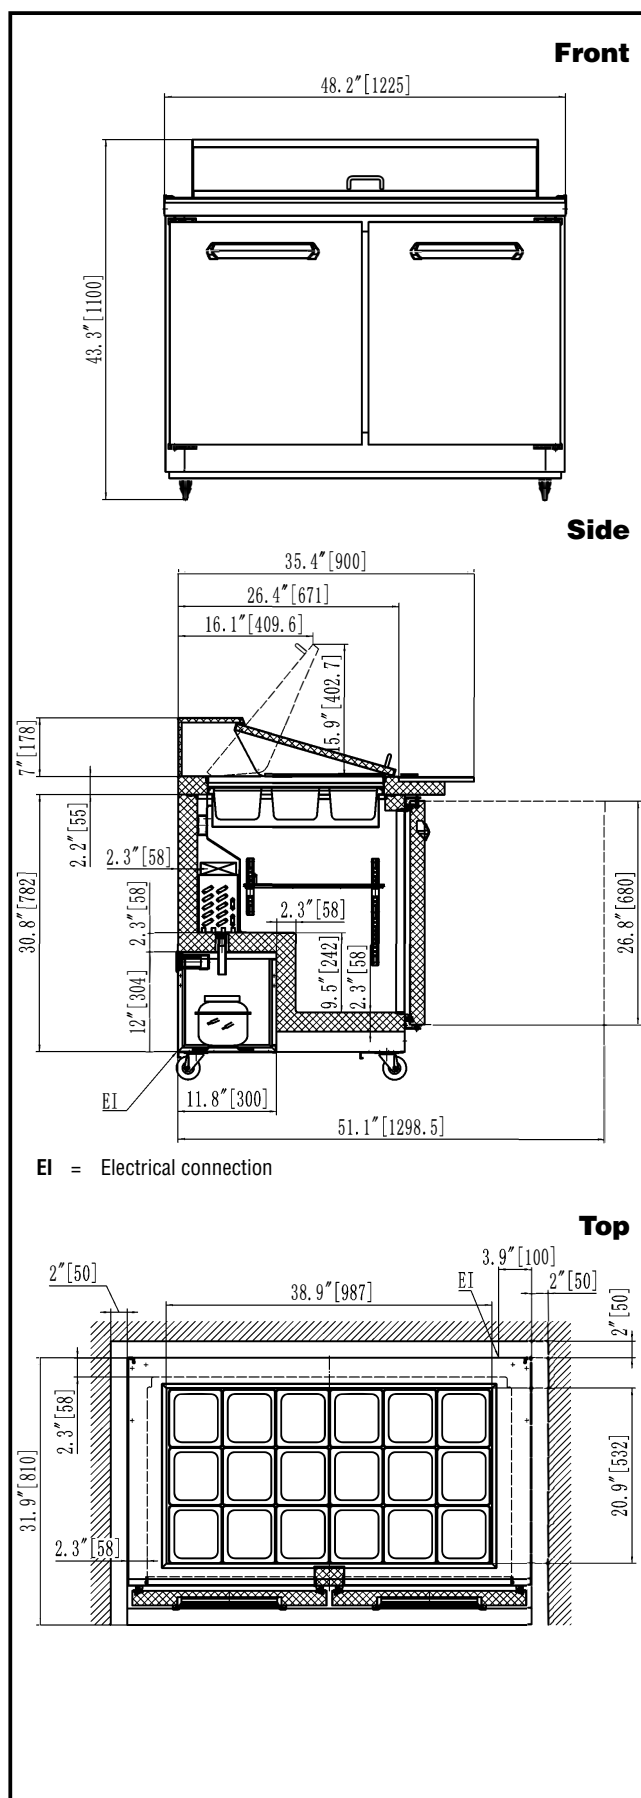

## Electric

<b>Supply voltage:</b>	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.72 kW
<b>Plug type:</b>	USA NEMA 5-15P

### Capacity:

**Gross capacity:** 12 cu.feet

### Key Information:

<b>Number and type of grids (included):</b>	2 - Vinyl-Coated Steel
<b>Warranty:</b>	3 / 5 years
<b>Door hinges:</b>	1 Left+1 Right
<b>External dimensions, Width:</b>	48 1/4" (1225 mm)
<b>External dimensions, Depth:</b>	35 7/16" (900 mm)
<b>External dimensions, Height:</b>	43 5/16" (1100 mm)
<b>Number and type of doors:</b>	2 Full
<b>Internal Dimensions (depth):</b>	23 13/16" / (605 mm)
<b>Internal Dimensions (height):</b>	23 1/2" / (597 mm)
<b>Internal Dimensions (width):</b>	42 13/16" / (1088 mm)
<b>Shipping height:</b>	47 1/4" (1200 mm)
<b>Shipping weight:</b>	337 lbs (153 kg)
<b>Shipping volume:</b>	48.78 ft <sup>3</sup> (1.38 m <sup>3</sup> )
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Current absorbed:</b>	
<b>738260 (KCHMT48.18)</b>	4.3 Amps
<b>Condenser type:</b>	Fin & tube
<b>Operating temperature min.:</b>	32 °F
<b>Compressor power:</b>	1/3 hp
<b>Operating temperature max.:</b>	41 °F
<b>Defrost type:</b>	Auto Defrost

## Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	90 g