



COMMERCIAL

Refrigeration Equipment 1-Door Under Counter Freezer 27" Long

ITEM #

MODEL #

NAME #

SIS #

AIA #



738265 (KCHUC27F)

1-Door Under Counter Freezer
27" Long

Short Form Specification

Item No.

1-door freezer counter top with exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel.

Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- shelf for 27" undercounter PNC 880599 ☐
- shelf clips PNC 880611 ☐

APPROVAL:


Part of




Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

Front

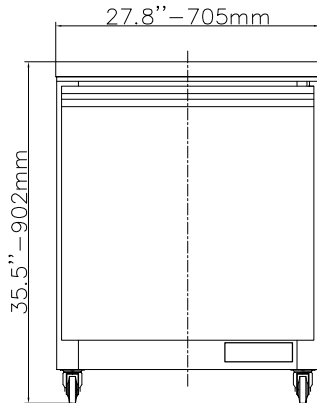

Side

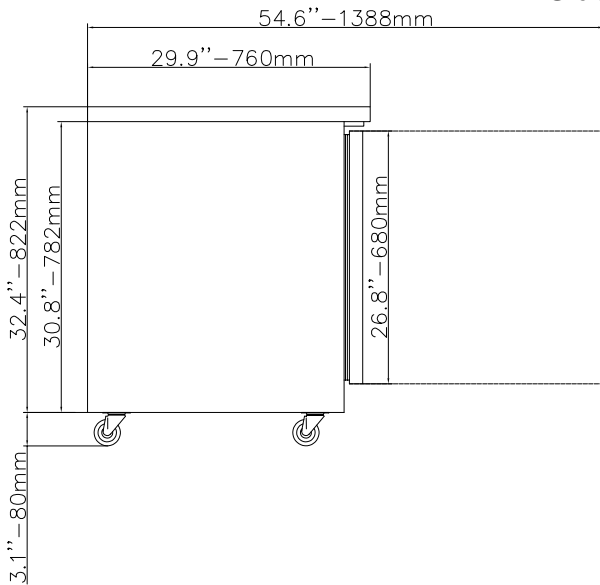

El = Electrical connection

Electric

Supply voltage:

738265 (KCHUC27F)

115 V/1 ph/60 Hz

Electrical power, max:

0.2 kW

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity:

8.2 cu.feet

Key Information:

Door hinges:

Right Side

Capacity:

8.19903 cu.ft.

External dimensions, Width:

27 3/4" (705 mm)

External dimensions, Depth:

29 15/16" (760 mm)

External dimensions, Height:

35 1/2" (902 mm)

Number and type of doors:

1 Full

Internal Dimensions (depth):

22 13/16"

Internal Dimensions (height):

23 1/2"

Internal Dimensions (width):

22 1/4"

Shipping height:

38 3/16" (970 mm)

Shipping weight:

172 lbs (78 kg)

Shipping volume:

20.41 ft³ (0.58 m³)

Number and type of grids (included):

1 - Vinyl-Coated Steel

Type of external material:

Stainless Steel

Type of internal material:

304 AISI

Warranty:

3 / 5 years

Refrigeration Data

Compressor Horsepower:

1/5

Operating temperature min.:

-9.4 °F

Operating temperature max.:

8.6 °F

Condenser type:

Fin & tube

Defrost type:

Auto Defrost

Sustainability

Current consumption:

1.9 Amps

Refrigerant type:

R290

Refrigerant weight:

110 g