

COMMERCIAL

Refrigeration Equipment Bottle Cooler with Slide Top, 13 cu.ft, 50" (R600a)



738267 (KCHBC50)

Slide Top Bottle Cooler 50 " Long

Short Form Specification

Item No.

Bottle cooler with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control.

Vinyl-coated steel adjustable dividers and locking lids.

R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking doors.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Locking lids.

Construction

- CFC and HCFC free (ecological refrigerant type: R600a).
- · Pre-wired heavy duty power cord.
- Electronic control to select temperatures.


Sustainability


• High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL:



Refrigeration Equipment Bottle Cooler with Slide Top, 13 cu.ft, 50" (R600a)

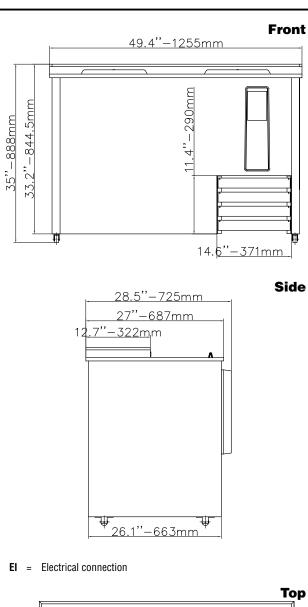

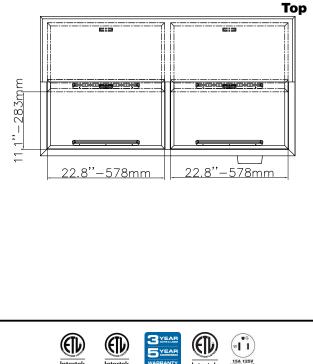

Intertel

Intertek

15A 125V NEMA 5-15P

Intertek

Electric

Electric	
Supply voltage: 738267 (KCHBC50) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.3 kW USA NEMA 5-15P
Capacity:	
Gross capacity:	17.1 cu.feet
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material: Warranty:	49 7/16" (1255 mm) 28 9/16" (725 mm) 34 15/16" (888 mm) 26 1/16" 22 15/16" 45 3/8" 39 3/4" (1010 mm) 298 lbs (135 kg) 34.04 ft ³ (0.96 m ³) Black Prepainted Steel Stainless Steel 3 / 5 years
Refrigeration Data	
Compressor Horsepower: Operating temperature min.: Operating temperature max.: Condenser type:	1/6 32 °F 41 °F Fin & tube
Sustainability	
Current consumption: Refrigerant type: Refrigerant weight:	3 Amps R600a 60 g

Refrigeration Equipment Bottle Cooler with Slide Top, 13 cu.ft, 50" (R600a)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.