

Refrigeration Equipment 2-Solid Door Back Bar Refrigerator Black 61" Long



738270 (KCHBB60S)

2-Solid Door Back Bar
Refrigerator Black 61" Long

Short Form Specification

Item No.

2-door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

ITEM #
MODEL #
NAME #
SIS #
AIA #

Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors protect the contents of the unit
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Shallow depth body, for narrow footprint
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting 378 standard 12-ounce long-neck bottles
- Cabinet capable of accepting 672 standard 12-ounce beverage cans

Construction

- Painted black steel exterior, for durable and sleek modern finish
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality
- Heavy-duty castors provided for durable support and easy repositioning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- 40 mm insulation for energy saving


APPROVAL:

Part of




Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

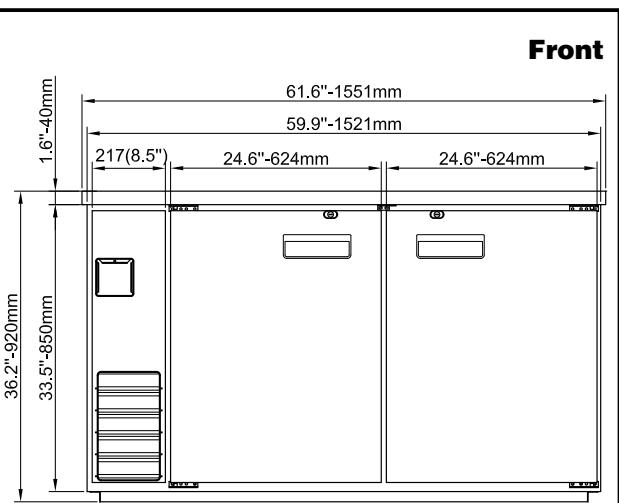

Front

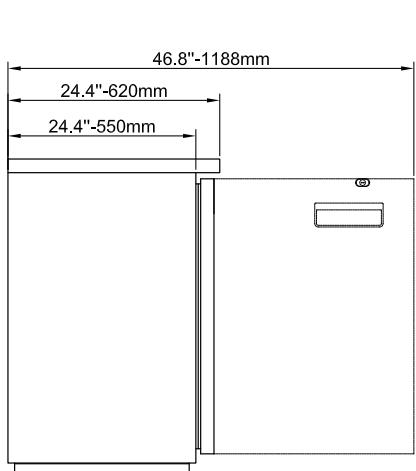

Side

E1 = Electrical connection

Electric

Supply voltage: 115 V/1 ph/60 Hz
Electrical power, max: 0.31 kW
Plug type: USA NEMA 5-15P

Capacity:

Gross capacity: 16.6 cu.feet

Key Information:

Number and type of grids (included): 4 - Vinyl-Coated Steel
Warranty: 3 / 5 years
Door hinges: 1 Left+1 Right
External dimensions, Width: 61 1/16" (1551 mm)
External dimensions, Depth: 24 7/16" (620 mm)
External dimensions, Height: 36 1/4" (920 mm)
Number and type of doors: 2 Full
Internal Dimensions (depth): 20 " / (508 mm)
Internal Dimensions (height): 28 " / (711.2 mm)
Internal Dimensions (width): 47 1/2" / (1206.5 mm)
Shipping height: 41 5/16" (1050 mm)
Shipping weight: 295 lbs (134 kg)
Shipping volume: 40.11 ft³ (1.14 m³)
Type of external material: Black Prepainted Steel
Type of internal material: Stainless Steel
Approvals ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type: Fin & tube
Operating temperature min.: 32 °F
Compressor power: 1/5 hp
Operating temperature max.: 41 °F
Defrost type: Auto Defrost

Sustainability

Current consumption: 3 Amps
Refrigerant type: R290
GWP Index: 3
Refrigerant weight: 110 g



Refrigeration Equipment 2-Solid Door Back Bar Refrigerator Black 61" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.