

## Refrigeration Equipment 2-Glass Door Back Bar Refrigerator Black 49" Long

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738272 (KCHBB48G)

2-Glass Door Back Bar  
Refrigerator Black 49" Long

### Short Form Specification

#### Item No.

2-glass door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

### Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.


### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Interior LED light to save energy and for best internal visibility.

APPROVAL: \_\_\_\_\_

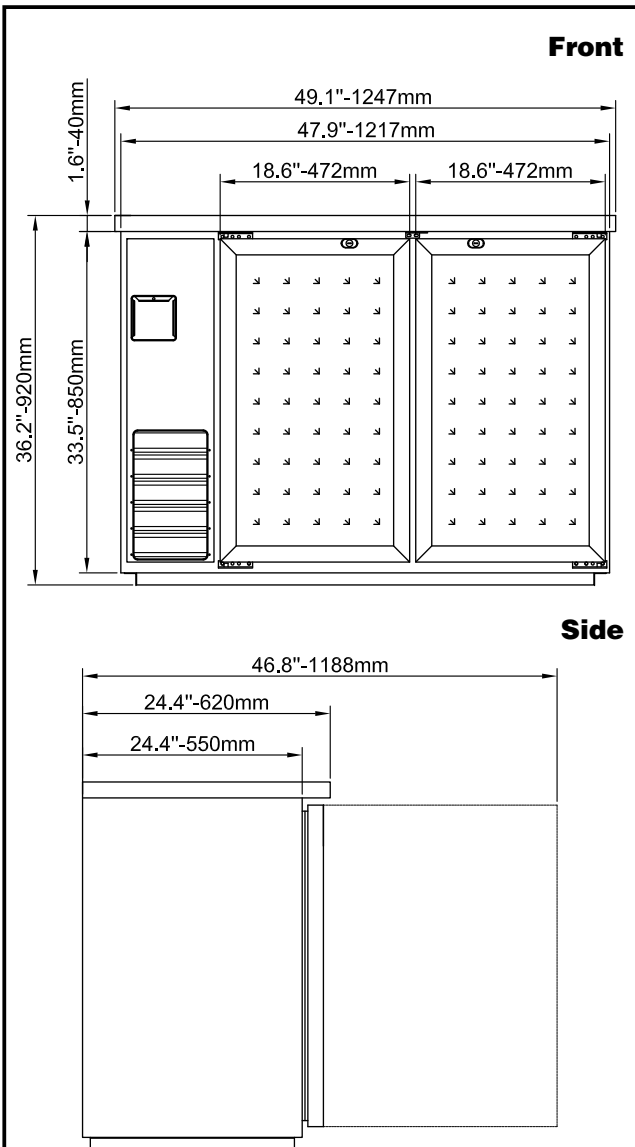

EI = Electrical connection

## Electric

|                        |                  |
|------------------------|------------------|
| Supply voltage:        | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.31 kW          |
| Plug type:             | USA NEMA 5-15P   |

## Capacity:

|                 |              |
|-----------------|--------------|
| Gross capacity: | 12.5 cu.feet |
|-----------------|--------------|

## Key Information:

|                                      |                                              |
|--------------------------------------|----------------------------------------------|
| Number and type of grids (included): | 4 - Vinyl-Coated Steel                       |
| Warranty:                            | 3 / 5 years                                  |
| Door hinges:                         | 1 Left+1 Right                               |
| External dimensions, Width:          | 49 1/16" (1247 mm)                           |
| External dimensions, Depth:          | 24 7/16" (620 mm)                            |
| External dimensions, Height:         | 36 1/4" (920 mm)                             |
| Number and type of doors:            | 2 Glass                                      |
| Internal Dimensions (depth):         | 20 " / (508 mm)                              |
| Internal Dimensions (height):        | 28 " / (711.2 mm)                            |
| Internal Dimensions (width):         | 36 " / (914.4 mm)                            |
| Shipping height:                     | 41 5/16" (1050 mm)                           |
| Shipping weight:                     | 284 lbs (129 kg)                             |
| Shipping volume:                     | 32.45 ft <sup>3</sup> (0.92 m <sup>3</sup> ) |
| Type of external material:           | Black Prepainted Steel                       |
| Type of internal material:           | Stainless Steel                              |
| Approvals                            | ETL C&US;ETL SANITATION                      |

## Refrigeration Data

|                             |              |
|-----------------------------|--------------|
| Condenser type:             | Fin & tube   |
| Operating temperature min.: | 32 °F        |
| Compressor power:           | 1/5 hp       |
| Operating temperature max.: | 41 °F        |
| Defrost type:               | Auto Defrost |

## Sustainability

|                      |        |
|----------------------|--------|
| Current consumption: | 3 Amps |
| Refrigerant type:    | R290   |
| GWP Index:           | 3      |
| Refrigerant weight:  | 110 g  |