

Refrigeration Equipment 3-Glass Door Back Bar Refrigerator Black 73" Long



738274 (KCHBB72G)

3-Glass Door Back Bar
Refrigerator Black 73" Long

Short Form Specification

Item No.

3-glass door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- External digital temperature display.
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors protect the contents of the unit
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Shallow depth body, for narrow footprint
- On/off switch controls interior LED lights
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting 504 standard 12-ounce long-neck bottles
- Cabinet capable of accepting 882 standard 12-ounce beverage cans

Construction

- Painted black steel exterior, for durable and sleek modern finish
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality
- Heavy-duty castors provided for durable support and easy repositioning.

Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Interior LED light to save energy and for best internal visibility.
- 40 mm insulation for energy saving

APPROVAL:


Part of



Kelvinator Commercial
www.kelvinatorcommercial.com

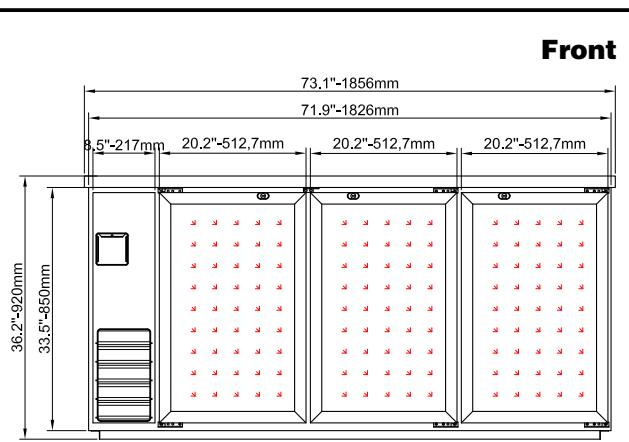

Front

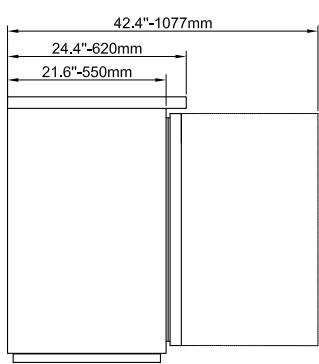

Side

El = Electrical connection

Electric

Supply voltage: 115 V/1 ph/60 Hz
Electrical power, max: 0.31 kW
Plug type: USA NEMA 5-15P

Capacity:

Gross capacity: 20.8 cu.feet

Key Information:

Number and type of grids (included):	6 - Vinyl-Coated Steel
Warranty:	3 / 5 years
Door hinges:	1 Left+2 Right
External dimensions, Width:	73 1/16" (1856 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 1/4" (920 mm)
Number and type of doors:	3 Glass
Internal Dimensions (depth):	20 " / (508 mm)
Internal Dimensions (height):	28 " / (711.2 mm)
Internal Dimensions (width):	60 " / (1524 mm)
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	397 lbs (180 kg)
Shipping volume:	47.8 ft ³ (1.35 m ³)
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	32 °F
Compressor power:	1/5 hp
Operating temperature max.:	41 °F
Defrost type:	Auto Defrost

Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	130 g



Refrigeration Equipment 3-Glass Door Back Bar Refrigerator Black 73" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.