

## Refrigeration Equipment 1-Door Full Height Reach In Back Room Freezer 31" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738279 (KCHRI25R1DFE)

1-Door Full Height Reach In  
Back Room Freezer 31" Long

### Short Form Specification

**Item No.** \_\_\_\_\_

1 full door freezer with door in 430 stainless steel, exterior back and bottom panels in galvanized steel, exterior side and top panels in prepainted steel; interior back, side, top and bottom panels in white High Impact Polystyrene. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key. Temperature range: - 8 °F min / 5 °F max.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- PVC shelves.

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

### Included Accessories


- 3 of Shelf for 25" Reach-In PNC 880678

### Optional Accessories


- Shelf clips (4-pack) PNC 880611
- Shelf for 25" Reach-In PNC 880678

APPROVAL: \_\_\_\_\_

**Front**

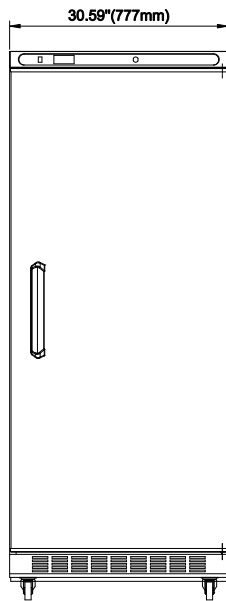


**Side**

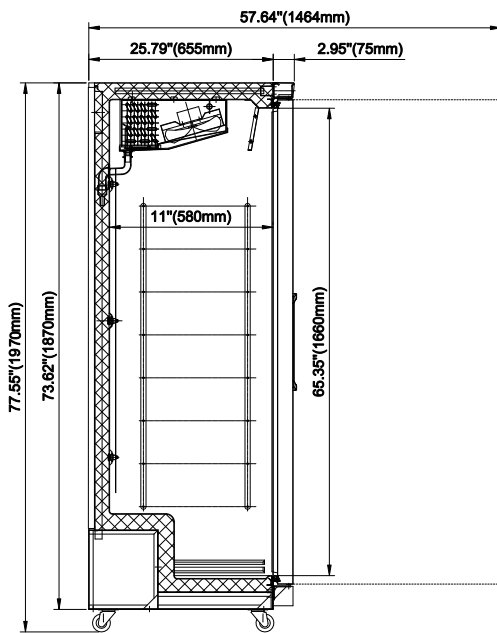

EI = Electrical connection

**Top**



## Electric

**Supply voltage:**

738279 (KCHRI25R1DFE) 115 V/1 ph/60 Hz

**Electrical power, max:**

0.407 kW

**Plug type:**

USA NEMA 5-15P

## Capacity:

**Gross capacity:** 22.7 cu.feet

## Key Information:

<b>Door hinges:</b>	Right Side
<b>External dimensions, Width:</b>	30 9/16" (777 mm)
<b>External dimensions, Depth:</b>	28 3/4" (730 mm)
<b>External dimensions, Height:</b>	77 3/16" (1960 mm)
<b>Number and type of doors:</b>	1 Full
<b>Internal Dimensions (depth):</b>	22 3/4" / (578 mm)
<b>Internal Dimensions (height):</b>	65 3/8" / (1660 mm)
<b>Internal Dimensions (width):</b>	26 3/8" / (670 mm)
<b>Shipping height:</b>	82 11/16" (2100 mm)
<b>Shipping weight:</b>	284 lbs (129 kg)
<b>Shipping volume:</b>	47.34 ft <sup>3</sup> (1.34 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	3 - Vinyl-Coated steel
<b>Type of external material:</b>	Prepainted Steel
<b>Type of internal material:</b>	High Impact White Polystyrene
<b>Warranty:</b>	3 / 5 years
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Compressor power:</b>	3/4 hp
<b>Operating temperature min.:</b>	-10.01 °F
<b>Operating temperature max.:</b>	0 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	auto defrost

## Sustainability

<b>Current consumption:</b>	8 Amps
<b>Refrigerant type:</b>	R290
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	119 g



Refrigeration Equipment  
1-Door Full Height Reach In Back Room Freezer 31" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.