



COMMERCIAL

Refrigeration Equipment 4-Half Door Full Height Refrigerator 54" Long

ITEM #

MODEL #

NAME #

SIS #

AIA #



738282 (KCHRI54R4HDR)

4-Half Door Full Height
Refrigerator 54" Long

Short Form Specification

Item No.

4-half door refrigerator with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- shelf for 54" and 81" (left/right) reach- PNC 880591 ☐
- shelf clips PNC 880611 ☐

APPROVAL:


Part of




Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

Front

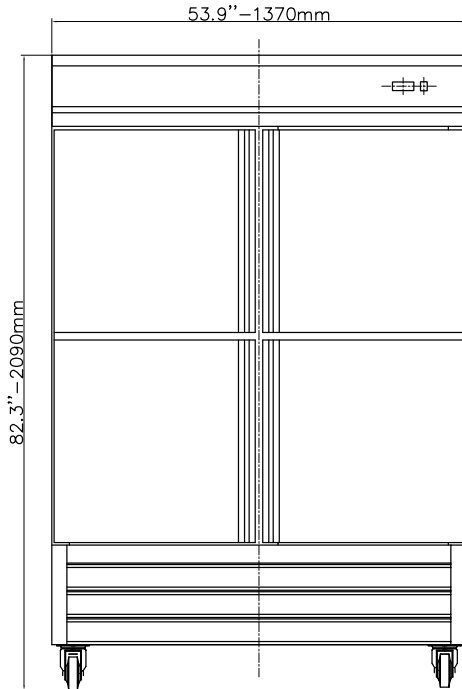

Side

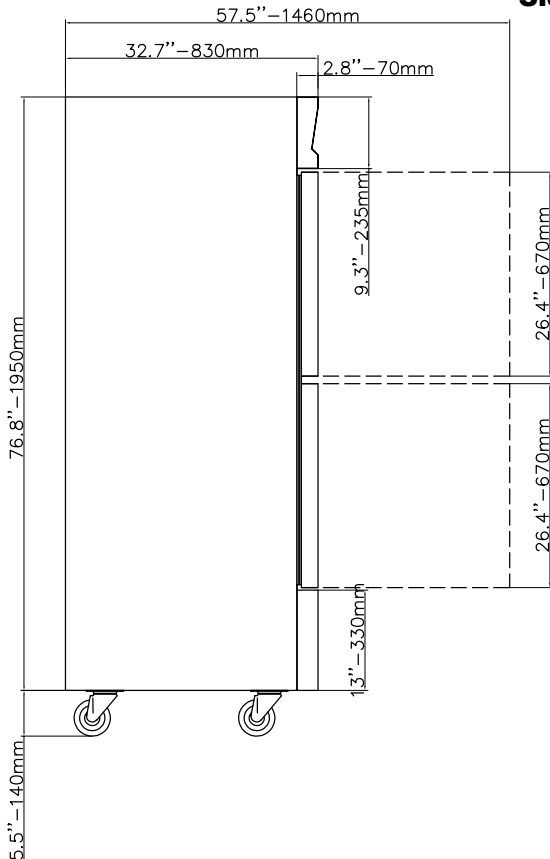

El = Electrical connection

Electric

Supply voltage:

738282 (KCHRI54R4HDR)

115 V/1 ph/60 Hz

Electrical power, max:

0.5 kW

Plug type:

USA NEMA 5-15P

Key Information:

Capacity (Cu. Ft.)	49
Door hinges:	Right Side
External dimensions, Width:	53 15/16" (1370 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	82 1/4" (2090 mm)
Number and type of doors:	4 Full
Internal Dimensions (depth):	27 1/16"
Internal Dimensions (height):	60 1/4"
Internal Dimensions (width):	24 7/16"
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	492 lbs (223 kg)
Shipping volume:	92.27 ft ³ (2.61 m ³)
Number and type of grids (included):	6 - Vinyl-Coated Steel
Type of external material:	430 AISI
Type of internal material:	304 AISI
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	3/4
Operating temperature min.:	ISO 9001 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Current consumption:	4.5 Amps
Refrigerant type:	R290
Refrigerant weight:	105 g



Refrigeration Equipment
4-Half Door Full Height Refrigerator 54" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.05.14