

## Refrigeration Equipment 2-Half Door Full Height Freezer 27" Long

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738285 (KCHRI27R2HDF)

2-Half Door Full Height  
Freezer 27" Long

### Short Form Specification

#### Item No.

2 half door freezer with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self closing and on-site reversible door feature with lock and key. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

### Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

### Optional Accessories


- 1 ADJUSTABLE FOOT PNC 206445 ☐
- Shelf for 27" Reach-In (Solid Door) PNC 880590 ☐
- Shelf clips (4-pack) PNC 880611 ☐

APPROVAL: \_\_\_\_\_

## Front

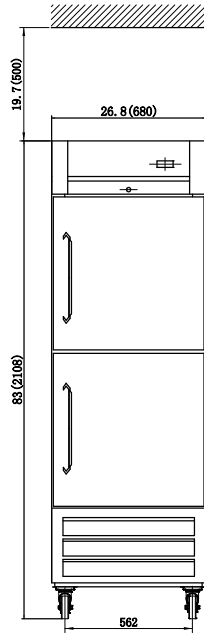


## Side

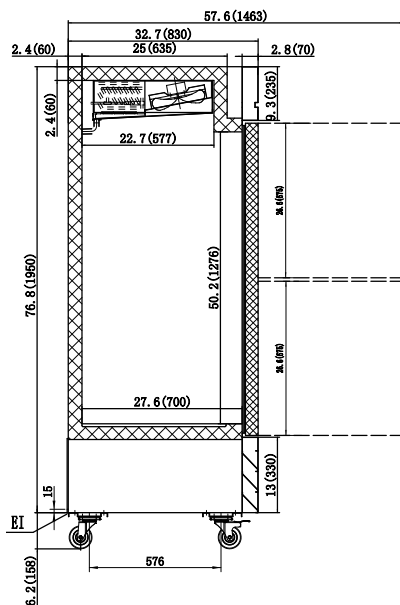

EI = Electrical connection

## Top



## Electric

|                        |                  |
|------------------------|------------------|
| Supply voltage:        | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.83 kW          |
| Plug type:             | USA NEMA 5-15P   |

## Capacity:

|                 |            |
|-----------------|------------|
| Gross capacity: | 21 cu.feet |
|-----------------|------------|

## Key Information:

|                                      |                         |
|--------------------------------------|-------------------------|
| Number and type of grids (included): | 3 - Vinyl-Coated Steel  |
| Warranty:                            | 3 / 5 years             |
| Door hinges:                         | Right Side              |
| External dimensions, Width:          | 26 3/4" (680 mm)        |
| External dimensions, Depth:          | 32 11/16" (830 mm)      |
| External dimensions, Height:         | 83 " (2108 mm)          |
| Number and type of doors:            | 2 Full                  |
| Internal Dimensions (depth):         | 27 1/2" / (698.5 mm)    |
| Internal Dimensions (height):        | 50 3/16" / (1275.08 mm) |
| Internal Dimensions (width):         | 22 3/16" / (563.88 mm)  |
| Shipping height:                     | 84 5/8" (2150 mm)       |
| Shipping weight:                     | 331 lbs (150 kg)        |
| Shipping volume:                     | 49.91 ft³ (1.41 m³)     |
| Type of external material:           | Stainless Steel         |
| Type of internal material:           | 304 AISI                |
| Approvals                            | ETL C&US;ETL SANITATION |

## Refrigeration Data

|                             |              |
|-----------------------------|--------------|
| Condenser type:             | Fin & tube   |
| Operating temperature min.: | -10.01 °F    |
| Compressor power:           | 3/4 hp       |
| Operating temperature max.: | 0 °F         |
| Defrost type:               | Auto Defrost |

## Sustainability

|                      |        |
|----------------------|--------|
| Current consumption: | 8 Amps |
| Refrigerant type:    | R290   |
| GWP Index:           | 3      |
| Refrigerant weight:  | 110 g  |