

## Refrigeration Equipment 4-Drawer Mega Top Prep Table 61" Long 24-1/6 Pan

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738288 (KCHMT60.24.4D)

4-Drawer Mega Top Prep  
Table 61" Long 24-1/6 Pan

### Short Form Specification

#### Item No.

4-drawer mega top refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 61x9x0,5 in. Control panel, and removable drawer gaskets. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.  
ETL Safety and Sanitation certifications.  
3/5 Years warranty.

### Main Features

- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.



### Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: \_\_\_\_\_

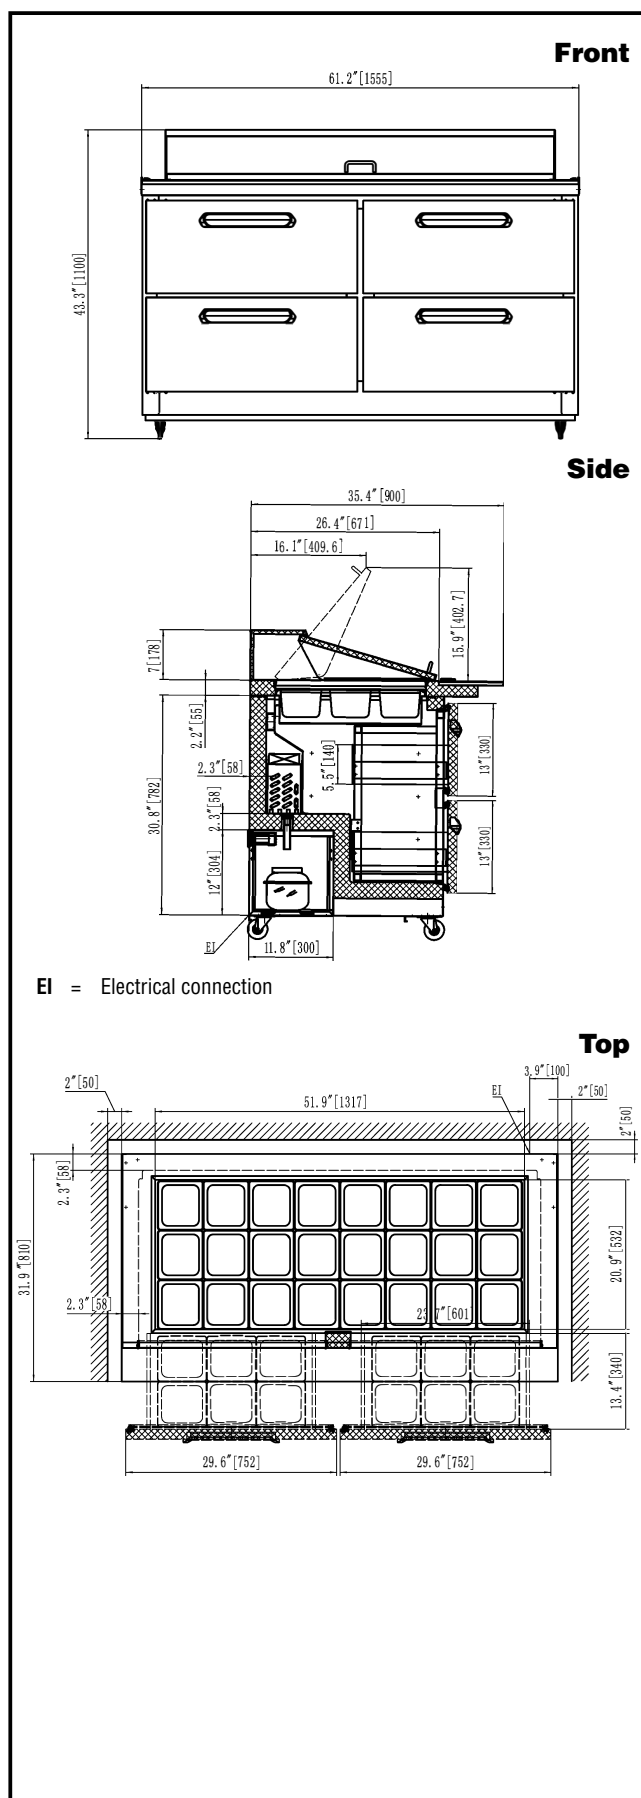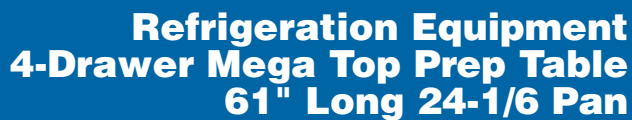

## Electric

<b>Supply voltage:</b>	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.78 kW
<b>Plug type:</b>	USA NEMA 5-15P

### Capacity:

<b>Gross capacity:</b>	15.5 cu.feet
------------------------	--------------

### Key Information:

<b>Warranty:</b>	3 / 5 years
<b>Capacity:</b>	15.5 cu.ft.
<b>External dimensions, Width:</b>	61 1/4" (1555 mm)
<b>External dimensions, Depth:</b>	35 7/16" (900 mm)
<b>External dimensions, Height:</b>	43 5/16" (1100 mm)
<b>Internal Dimensions (depth):</b>	23 13/16" / (605 mm)
<b>Internal Dimensions (height):</b>	23 1/2" / (597 mm)
<b>Internal Dimensions (width):</b>	56 1/4" / (1429 mm)
<b>Shipping height:</b>	47 1/4" (1200 mm)
<b>Shipping weight:</b>	518 lbs (235 kg)
<b>Shipping volume:</b>	61.5 ft³ (1.74 m³)
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Approvals</b>	ETL C&US;ETL SANITATION
<b>N° of drawers:</b>	4

## Refrigeration Data

<b>Condenser type:</b>	Fin & tube
<b>Operating temperature min.:</b>	32 °F
<b>Compressor power:</b>	1/3 hp
<b>Operating temperature max.:</b>	41 °F
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Current consumption:</b>	4.3 Amps
<b>Refrigerant type:</b>	R290
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	90 g

