

Refrigeration Equipment 3-Door Under Counter Refrigerator 72" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738292 (KCHUC72R)

3-Door Under Counter
Refrigerator 72" Long

Short Form Specification

Item No. _____

3-door refrigerator counter top, 35.5 inches tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display. R290 gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.


Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

APPROVAL: _____

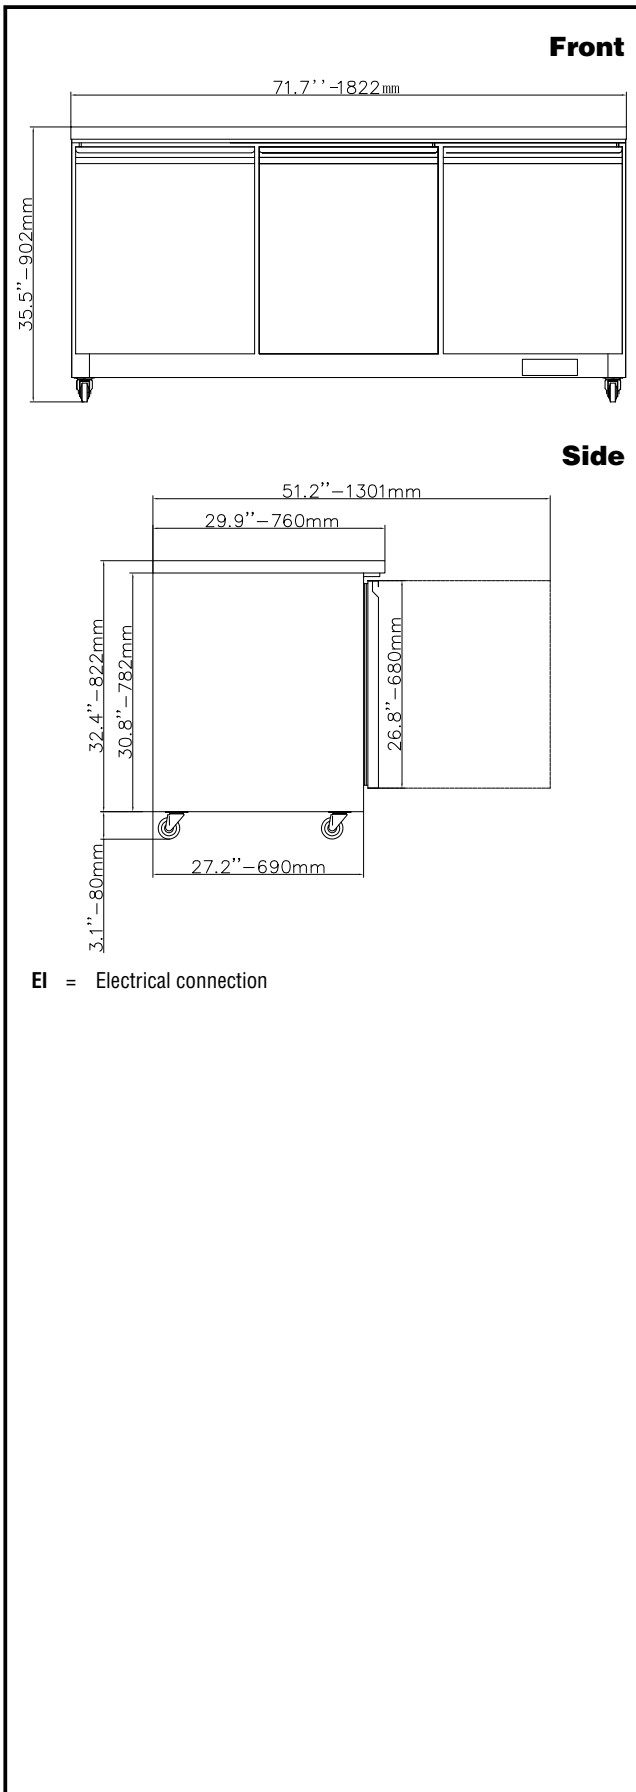

Optional Accessories

- 1 ADJUSTABLE FOOT PNC 206445
- Drawer Kit for 48" Mega Top, Salad Top, Undercounter and L/R section of 70" Salad & Mega Top and 72" Undercounter PNC 880616
- Drawer Kit for Center Section of 70" Salad, Mega Top Prep Table & 72" Undercounter PNC 880699

Electric

Supply voltage:	738292 (KCHUC72R)	115 V/1 ph/60 Hz
Electrical power, max:		0.36 kW
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	18 cu.feet
Number and type of grids (included):	3 - 538x425/580x425

Key Information:

Door hinges:	1 Left+2 Right
Capacity:	17.9999 cu.ft.
External dimensions, Width:	71 3/4" (1822 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	35 1/2" (902 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	24 13/16" / (630 mm)
Internal Dimensions (height):	24 7/16" / (620 mm)
Internal Dimensions (width):	66 15/16" / (1700 mm)
Shipping height:	38 3/16" (970 mm)
Shipping weight:	335 lbs (152 kg)
Shipping volume:	51.02 ft ³ (1.44 m ³)
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Warranty:	3 / 5 years
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Current absorbed:	3.5 Amps
Compressor power:	1/5 hp
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Refrigerant type:	R290
--------------------------	------

GWP Index: 3
Refrigerant weight: 130 g