

Refrigeration Equipment Slide Top Bottle Cooler 95 " Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738293 (KCHBC95)

Slide Top Bottle Cooler 95
" Long

Short Form Specification

Item No. _____

95" wide Bottle Cooler with 3 sliding tops. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior side panels in 430 stainless steel, interior back panel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control.

Vinyl-coated steel adjustable dividers and locking lids.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking doors.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Locking lids.


Construction

- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

APPROVAL: _____

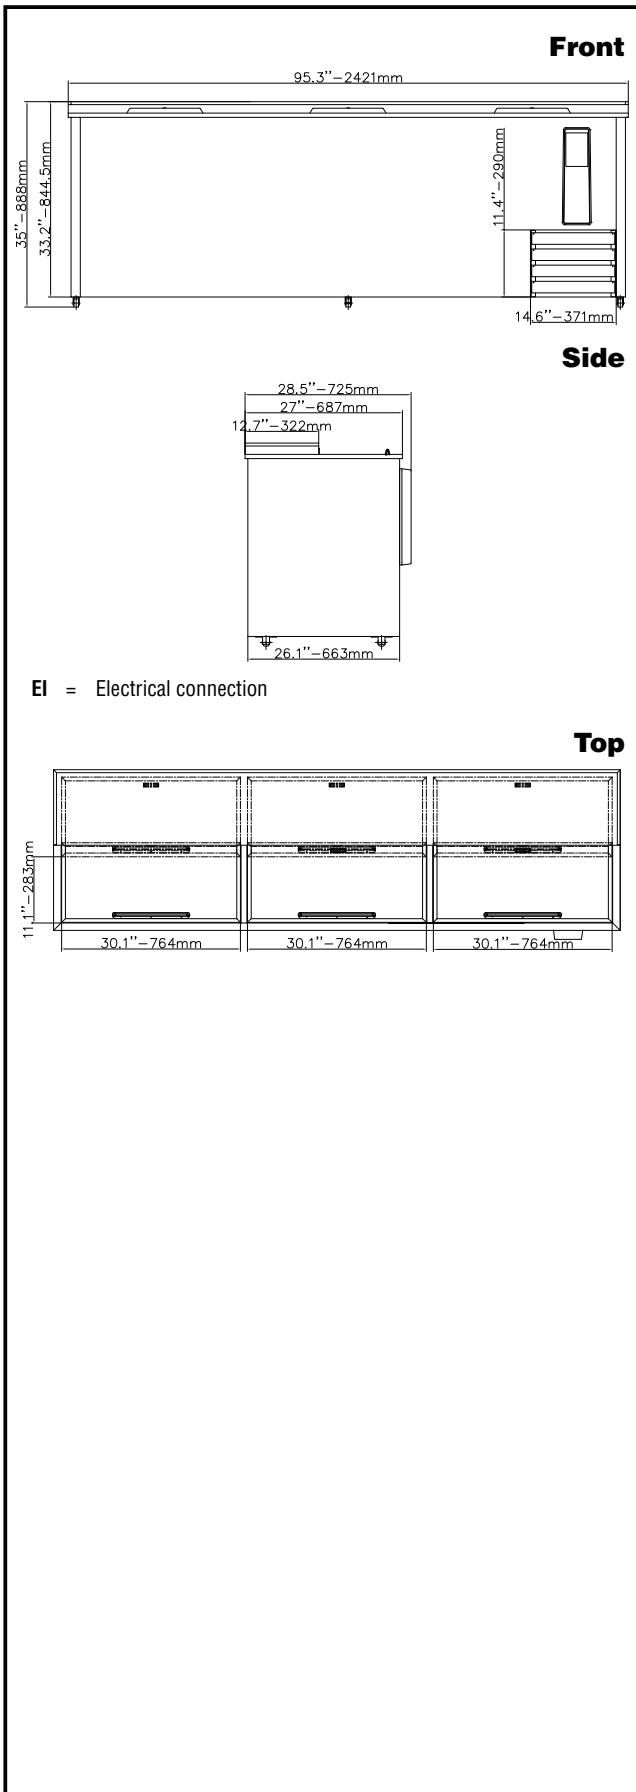

Electric

| | |
|------------------------|------------------|
| Supply voltage: | 115 V/1 ph/60 Hz |
| 738293 (KCHBC95) | |
| Electrical power, max: | 0.31 kW |
| Plug type: | USA NEMA 5-15P |

Capacity:

| | |
|--------------------------------------|--------------|
| Gross capacity: | 29.1 cu.feet |
| Number and type of grids (included): | 3 - 513x605 |

Key Information:

| | |
|-------------------------------|--|
| External dimensions, Width: | 95 5/16" (2421 mm) |
| External dimensions, Depth: | 28 9/16" (725 mm) |
| External dimensions, Height: | 34 15/16" (888 mm) |
| Number and type of doors: | 3 |
| Internal Dimensions (depth): | 26 1/16" / (662 mm) |
| Internal Dimensions (height): | 22 15/16" / (583 mm) |
| Internal Dimensions (width): | 60 3/8" / (1534 mm) |
| Shipping height: | 39 3/4" (1010 mm) |
| Shipping weight: | 381 lbs (173 kg) |
| Shipping volume: | 64.92 ft ³ (1.84 m ³) |
| Type of external material: | Black Prepainted Steel |
| Type of internal material: | Stainless Steel |
| Warranty: | 3 / 5 years |
| Approvals | ETL C&US;ETL SANITATION |

Refrigeration Data

| | |
|-----------------------------|--------------|
| Compressor power: | 1/5 hp |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Auto Defrost |

Sustainability

| | |
|----------------------|--------|
| Current consumption: | 3 Amps |
| Refrigerant type: | R290 |
| GWP Index: | 3 |
| Refrigerant weight: | 100 g |

