

Refrigeration Equipment Slide Top Bottle Cooler Black 95" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738293 (KCHBC95)

Slide Top Bottle Cooler Black
95" Long

Short Form Specification

Item No. _____

95" wide Bottle Cooler with 3 sliding tops. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior side panels in 430 stainless steel, interior back panel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control.

Vinyl-coated steel adjustable dividers and locking lids.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Locking lids protect the contents of the unit.
- Bottle opener & cap catcher included, for clean and efficient bar area
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting 792 standard 12-ounce long-neck bottles


Construction

- Painted black steel exterior, for durable and sleek modern finish
- Pre-wired heavy duty power cord.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Electronic control to select temperatures.
- Smooth rolling wheels, for effortless mobility
- Stainless steel worktop, durable functionality

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Interior LED light to save energy and for best internal visibility.
- 40 mm insulation for energy saving

APPROVAL: _____

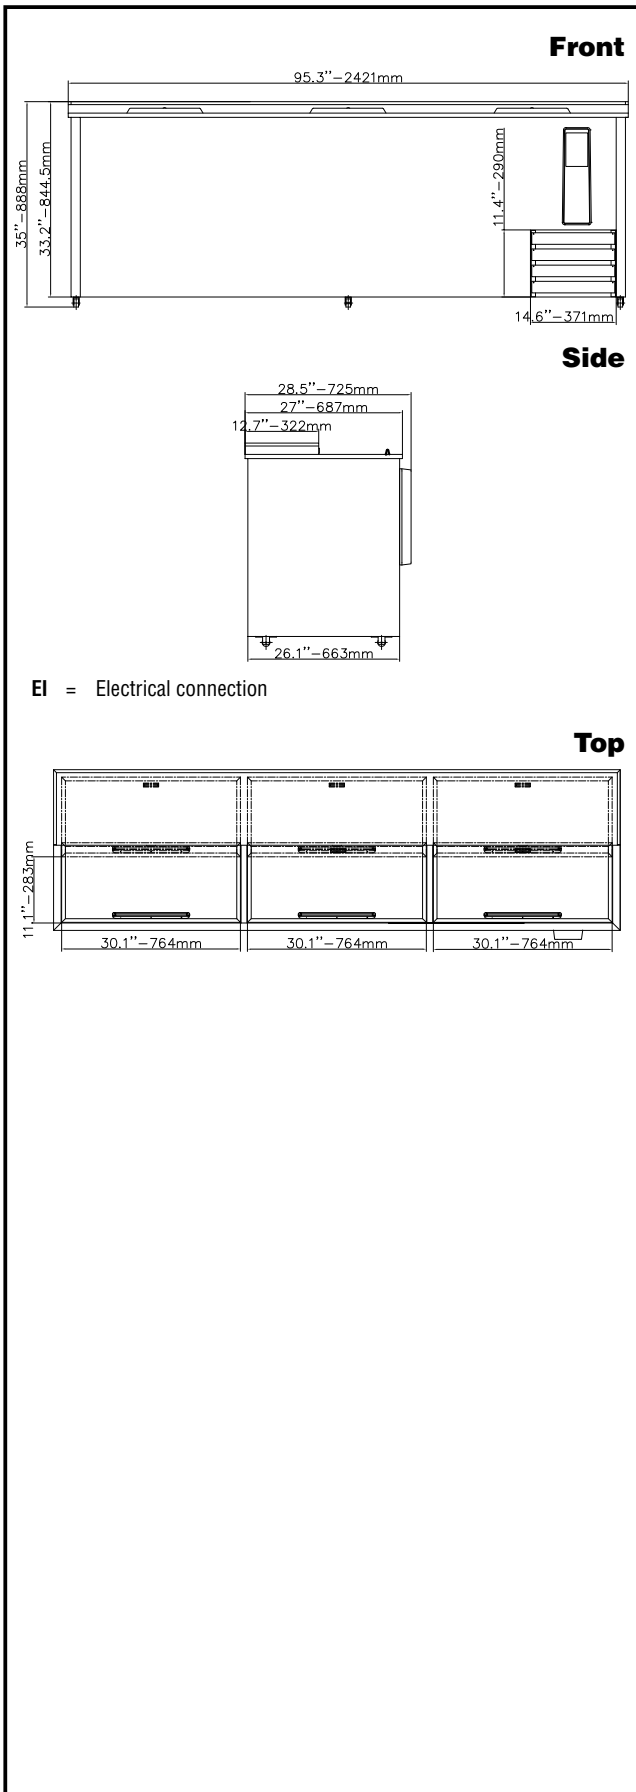

Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.31 kW
Plug type:	USA NEMA 5-15P

Capacity:

Number and type of grids (included):	3 - 513x605
Gross capacity:	29.1 cu.feet

Key Information:

Warranty:	3 / 5 years
External dimensions, Width:	95 5/16" (2421 mm)
External dimensions, Depth:	28 9/16" (725 mm)
External dimensions, Height:	34 15/16" (888 mm)
Number and type of doors:	3
Internal Dimensions (depth):	26 1/16" / (662 mm)
Internal Dimensions (height):	22 15/16" / (583 mm)
Internal Dimensions (width):	60 3/8" / (1534 mm)
Shipping height:	39 3/4" (1010 mm)
Shipping weight:	381 lbs (173 kg)
Shipping volume:	64.92 ft ³ (1.84 m ³)
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	32 °F
Compressor power:	1/5 hp
Operating temperature max.:	41 °F
Defrost type:	Auto Defrost

Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	100 g

