

## Refrigeration Equipment 2-Door 2-Tower Draft Box Black 49" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738297 (KCHBBD2D2T)

2-Door 2-Tower Draft Box  
Black 49" Long

### Short Form Specification

Item No. \_\_\_\_\_

2-door Beer dispenser with 2 columns. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments.

Automatic Defrost Cooling System and temperature control.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

### Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors protect the contents of the unit
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Shallow depth body, for narrow footprint
- Refrigerated towers
- Remote CO2 connection setup for streamlined gas management
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting (2) half-barrel, (3) slim quarter-barrel, (4) quarter-barrel, and (6) sixth-barrel kegs

### Construction

- Painted black steel exterior, for durable and sleek modern finish
- Self-closing door with 90-degree stay-open feature.
- Lockable door.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Heavy duty casters.
- Internal drain for easy clean out.
- Stainless steel worktop, durable functionality
- Heavy gauge reinforced steel exterior bottom panel


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 40 mm insulation for energy saving

### Optional Accessories

- Draft Tower; Double Faucet PNC 880677

APPROVAL: \_\_\_\_\_

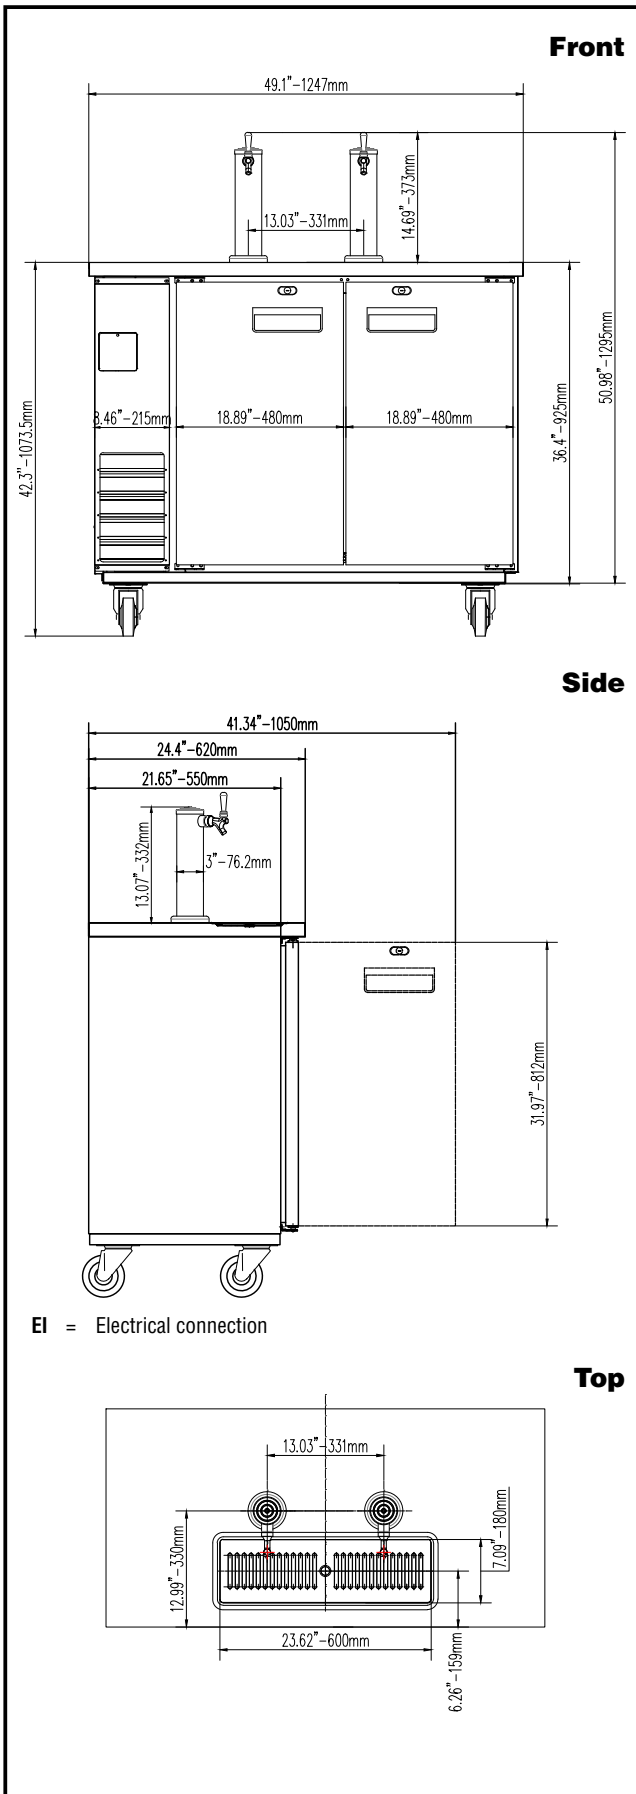

## Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.31 kW
Plug type:	USA NEMA 5-15P

## Capacity:

Gross capacity:	12.5 cu.feet
-----------------	--------------

## Key Information:

Number and type of grids (included):	4 - Vinyl-Coated Steel
Warranty:	3 / 5 years
Door hinges:	1 Left+1 Right
External dimensions, Width:	49 1/16" (1247 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	56 15/16" (1446.5 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	20 " / (508 mm)
Internal Dimensions (height):	28 " / (711.2 mm)
Internal Dimensions (width):	36 " / (914.4 mm)
Shipping height:	58 11/16" (1490 mm)
Shipping weight:	269 lbs (122 kg)
Shipping volume:	56.92 ft <sup>3</sup> (1.61 m <sup>3</sup> )
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Approvals	ETL C&US;ETL SANITATION

## Refrigeration Data

Current absorbed:	
738297 (KCHBBD2D2T)	3 Amps
Condenser type:	Fin & tube
Operating temperature min.:	32 °F
Compressor power:	1/5 hp
Operating temperature max.:	41 °F
Defrost type:	Auto Defrost

## Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	110 g