

Refrigeration Equipment 3-Door 2-Tower Draft Box Black 73" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738298 (KCHBBD3D2T)

3-Door 2-Tower Draft Box
Black 73" Long

Short Form Specification

Item No. _____

3-door Beer dispenser with 2 columns. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments.

Automatic Defrost Cooling System and temperature control.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors protect the contents of the unit
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Shallow depth body, for narrow footprint
- Refrigerated towers
- Remote CO2 connection setup for streamlined gas management
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting (3) half-barrel, (6) slim quarter-barrel, (6) quarter-barrel, and (12) sixth-barrel kegs

Construction

- Painted black steel exterior, for durable and sleek modern finish
- Self-closing door with 90-degree stay-open feature.
- Lockable door.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Heavy duty casters.
- Internal drain for easy clean out.
- Stainless steel worktop, durable functionality
- Heavy gauge reinforced steel exterior bottom panel


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 40 mm insulation for energy saving

Optional Accessories

- Draft Tower; Double Faucet PNC 880677

APPROVAL: _____

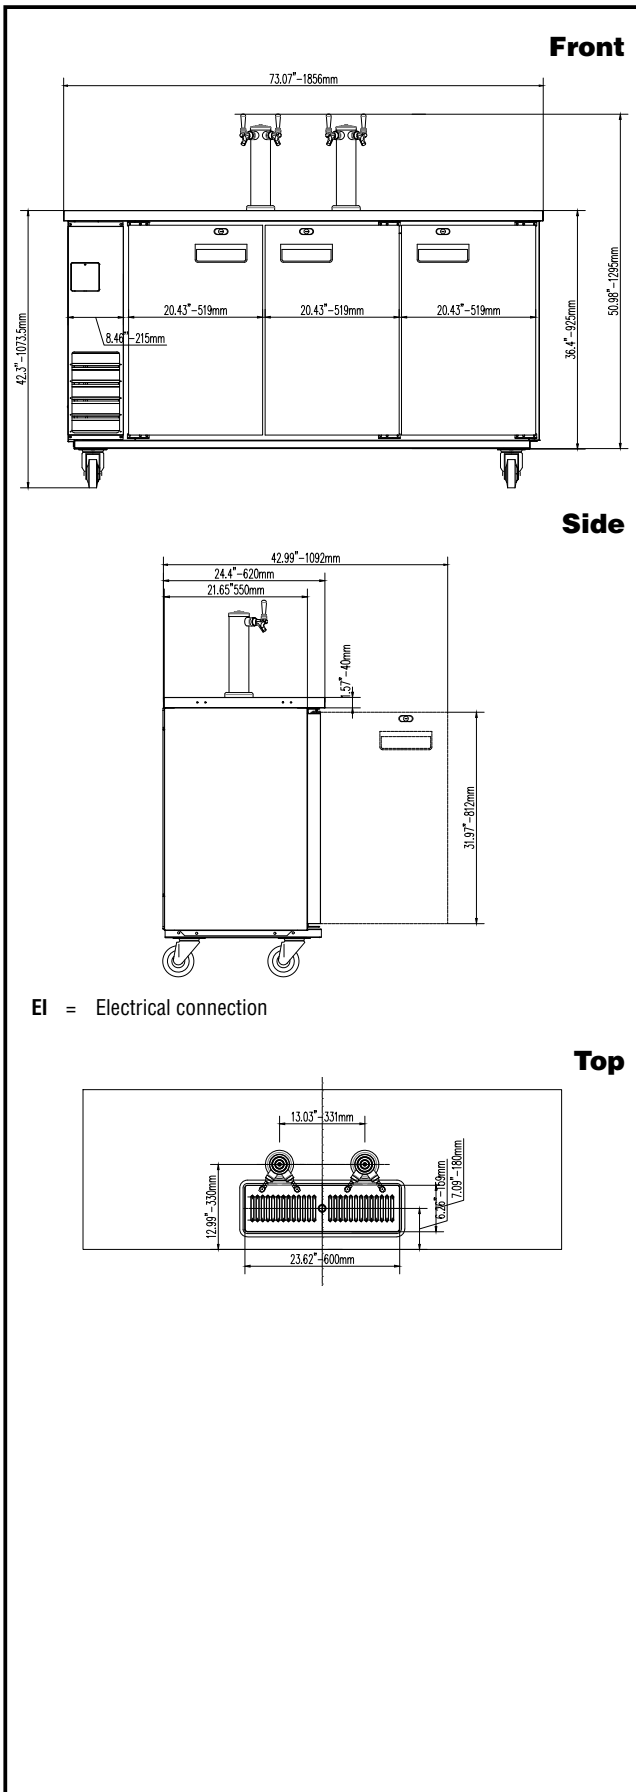

Electric

| | |
|------------------------|------------------|
| Supply voltage: | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.31 kW |
| Plug type: | USA NEMA 5-15P |

Capacity:

| | |
|-----------------|--------------|
| Gross capacity: | 20.8 cu.feet |
|-----------------|--------------|

Key Information:

| | |
|--------------------------------------|--|
| Number and type of grids (included): | 4 - Vinyl-Coated Steel |
| Warranty: | 3 / 5 years |
| Door hinges: | 1 Left+2 Right |
| External dimensions, Width: | 73 1/16" (1856 mm) |
| External dimensions, Depth: | 24 7/16" (620 mm) |
| External dimensions, Height: | 56 15/16" (1446.5 mm) |
| Number and type of doors: | 3 Full |
| Internal Dimensions (depth): | 20 " / (508 mm) |
| Internal Dimensions (height): | 28 " / (711.2 mm) |
| Internal Dimensions (width): | 60 " / (1524 mm) |
| Shipping height: | 58 11/16" (1490 mm) |
| Shipping weight: | 375 lbs (170 kg) |
| Shipping volume: | 67.83 ft ³ (1.92 m ³) |
| Type of external material: | Black Prepainted Steel |
| Type of internal material: | Stainless Steel |
| Approvals | ETL C&US;ETL SANITATION |

Refrigeration Data

| | | |
|-----------------------------|---------------------|--------------|
| Current absorbed: | 738298 (KCHBBD3D2T) | 3 Amps |
| Condenser type: | | Fin & tube |
| Operating temperature min.: | | 32 °F |
| Compressor power: | | 1/5 hp |
| Operating temperature max.: | | 41 °F |
| Defrost type: | | Auto Defrost |

Sustainability

| | |
|---------------------|-------|
| Refrigerant type: | R290 |
| GWP Index: | 3 |
| Refrigerant weight: | 130 g |

