

**Refrigeration Equipment  
3-Hinged Glass Door Full Height  
Merchandiser Freezer 81" Long**



738310 (KCHGM72F)

3-Hinged Glass Door Full Height Merchandiser Freezer 81" Long

**Short Form Specification**

**Item No.**

3-glass door freezer with exterior back panel, bottom panel, and top panel in galvanized steel, exterior side panels in painted steel; interior back, side, and top panels in painted aluminum, and internal bottom panel in 304 stainless steel. Durable and easy to clean for daily commercial use. Electronic control with cabinet temperature display. Self-closing door feature lock and key.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

**ITEM #** \_\_\_\_\_

**MODEL #** \_\_\_\_\_

**NAME #** \_\_\_\_\_

**SIS #** \_\_\_\_\_

**AIA #** \_\_\_\_\_

**Main Features**

- External temperature display.
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Adjustable shelves for flexible storage
- Decorative illuminated header, customizable for enhanced branding capability
- On/off switch controls interior LED lights
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Removable rubber bumper guards for airflow spacing and shock absorption

**Construction**

- Painted black steel exterior, for durable and sleek modern finish
- Self closing doors.
- White aluminum interior, bright and clean polished look for elevated presentation
- Lockable door.
- Electronic control to select temperatures.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.

**Sustainability**

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- 60 mm insulation for energy saving.

**Optional Accessories**

• Shelf for 48" and 72" (left/right) Merchandiser (Glass Door)	PNC 880594	<input type="checkbox"/>
• Middle Shelf for 72" Merchandiser (Glass Door)	PNC 880595	<input type="checkbox"/>
• Shelf clips (4-pack)	PNC 880611	<input type="checkbox"/>


**APPROVAL:** \_\_\_\_\_

Part of




Electrolux  
Professional  
Group


**Kelvinator Commercial**  
[www.kelvinatorcommercial.com](http://www.kelvinatorcommercial.com)

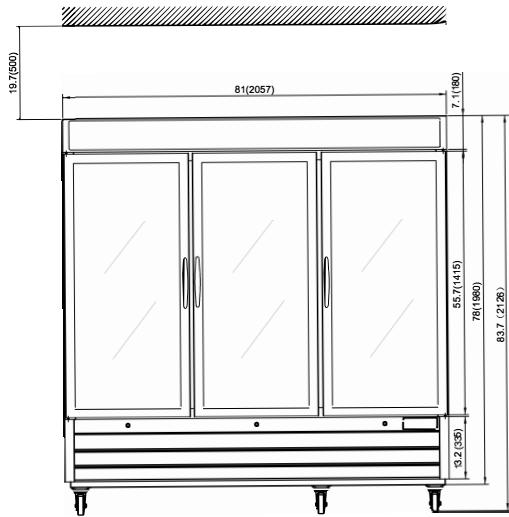

**Front**

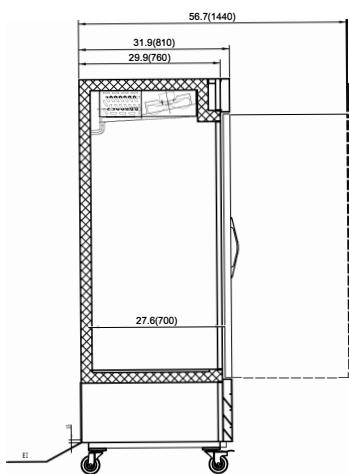

**Side**

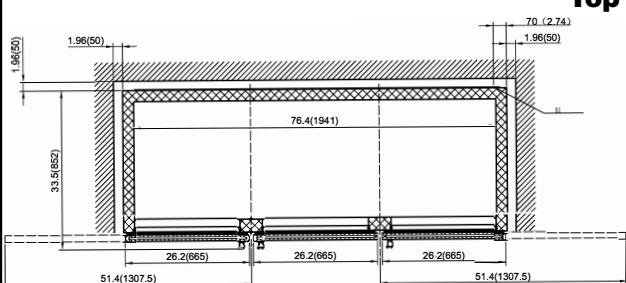

**Top**

## Electric

**Supply voltage:** 115-230 V/1 ph/60 Hz  
**Electrical power, max:** 1.08 kW  
**Plug type:** USA NEMA L14-20P

## Capacity:

**Gross capacity:** 72 cu.feet

## Key Information:

<b>Number and type of grids (included):</b>	12 - Vinyl-Coated steel
<b>Warranty:</b>	3 / 5 years
<b>Door hinges:</b>	1 Left+2 Right
<b>External dimensions, Width:</b>	81 " (2057 mm)
<b>External dimensions, Depth:</b>	31 7/8" (810 mm)
<b>External dimensions, Height:</b>	83 11/16" (2126 mm)
<b>Number and type of doors:</b>	3 Glass
<b>Internal Dimensions (depth):</b>	27 1/2" (698.5 mm)
<b>Internal Dimensions (height):</b>	52 3/8" (1330.96 mm)
<b>Internal Dimensions (width):</b>	76 3/8" (1940.56 mm)
<b>Shipping height:</b>	85 13/16" (2180 mm)
<b>Shipping weight:</b>	774 lbs (351 kg)
<b>Shipping volume:</b>	142.86 ft <sup>3</sup> (4.05 m <sup>3</sup> )
<b>Type of external material:</b>	Black Prepainted Steel
<b>Type of internal material:</b>	White Prepainted Aluminium
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

**Condenser type:** Fin & tube  
**Operating temperature min.:** -10.01 °F  
**Compressor power:** 1 ½ hp  
**Operating temperature max.:** 0 °F  
**Defrost type:** Auto Defrost

## Sustainability

**Current consumption:** 9 Amps  
**Refrigerant type:** R290  
**Refrigerant weight:** 150 g

**EI** = Electrical connection