


COMMERCIAL

Refrigerated bases 2-Drawer Chef Base Refrigerator 50" Long

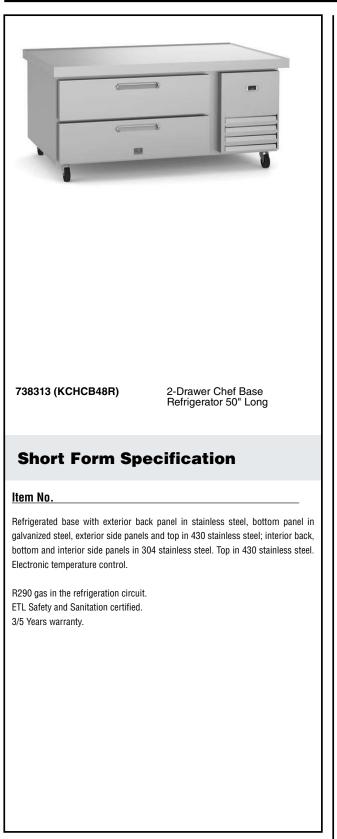

EM #
IODEL #
AME #
IS #
IA #

Main Features

- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Reccomended maximum temperature on worktop surface is 572°F.
- Insulation of the top guaranteed thanks to the Integrated ceramic fiber heat shield.

Construction

• Pre-wired heavy duty power cord.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.

APPROVAL:


Part of



Refrigerated bases 2-Drawer Chef Base Refrigerator 50" Long



Supply voltage: 738313 (KCHCB48R) Electrical power, max: Total Watts: Plug type:	115 V/1 ph/60 Hz 0.2 kW 0.2 kW USA NEMA 5-15P
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Gross capacity: Net weight: Shipping width: Shipping depth: Shipping height: Shipping weight: Shipping volume:	50 " (1270 mm) 31 7/8" (810 mm) 26 " (660 mm) 234 lbs (106 kg) 51 3/16" (1300 mm) 32 7/8" (835 mm) 28 3/8" (720 mm) 260 lbs (118 kg) 27.6 ft ³ (0.78 m ³)
Refrigeration Data	
Refrigerant weight:	0.198 lbs (90 g)
Sustainability	
Current consumption: Refrigerant type:	2.1 Amps R290

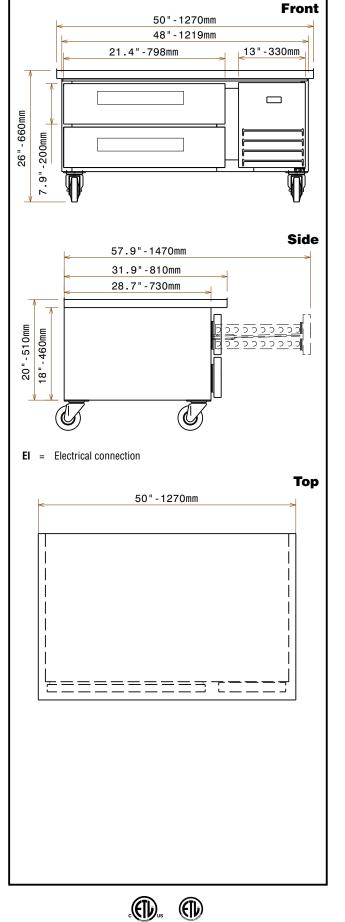

Intertek

Intertek

Refrigerated bases 2-Drawer Chef Base Refrigerator 50" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.