



COMMERCIAL

Refrigeration Equipment 2-Half Glass Door Full Height Refrigerator 27" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738317 (KCHRI27R2HGDR) 2-Half Glass Door Full Height Refrigerator 27" Long

Short Form Specification

Item No. _____

2-half glass door refrigerator with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

Main Features

- External digital temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Heavy duty Vinyl coated steel shelves.

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Lockable door.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.

Sustainability


- Interior LED light to save energy and for best internal visibility.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

Optional Accessories


- 1 ADJUSTABLE FOOT PNC 206445
- Shelf clips (4-pack) PNC 880611
- Shelf for 27 reach in (glass door) PNC 880618

APPROVAL: _____

Front

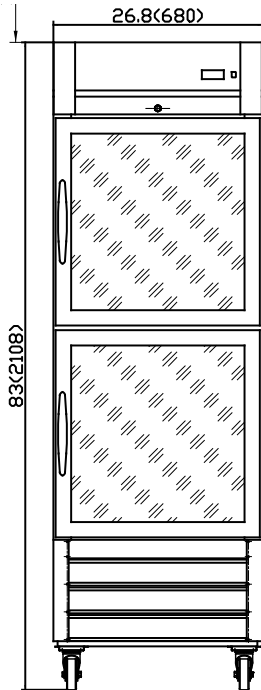

Side

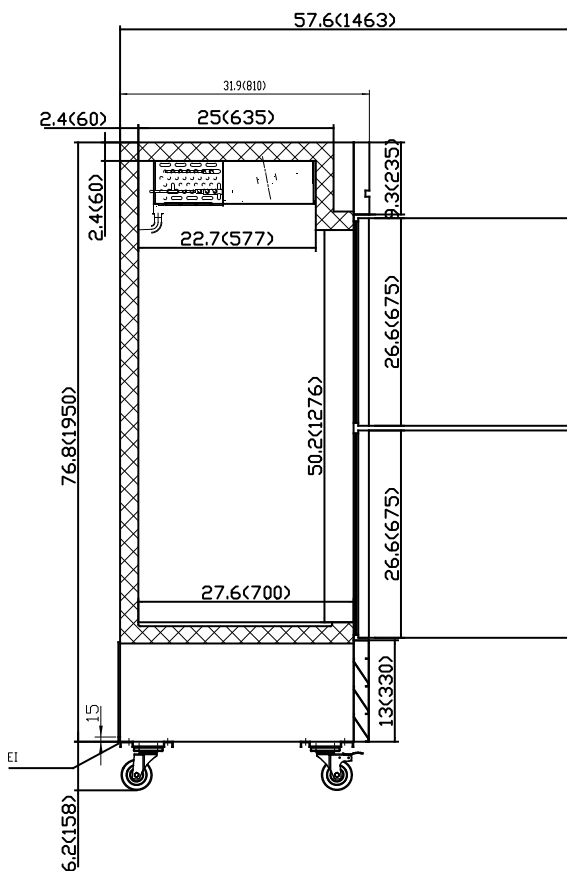

EI = Electrical connection

Electric

Supply voltage:	738317 (KCHRI27R2HGDR)	115 V/1 ph/60 Hz
Electrical power, max:		0.36 kW
Plug type:		USA NEMA 5-15P

Key Information:

Door hinges:	Right Side
Capacity (Cu. Ft.):	23
External dimensions, Width:	26 13/16" (681 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	82 1/4" (2090 mm)
Number and type of doors:	2x1/2 Glass
Internal Dimensions (depth):	27 1/2"
Internal Dimensions (height):	50 3/16"
Internal Dimensions (width):	22 3/16"
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	331 lbs (150 kg)
Shipping volume:	49.91 ft ³ (1.41 m ³)
Number and type of grids (included):	3 - Vinyl-Coated steel
Type of external material:	430 ASI
Type of internal material:	304 AISI
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/6
Operating temperature min.:	34.34 °F
Operating temperature max.:	38.7 °F
Condenser Type:	Fin & Tube
Defrost type:	Automatic

Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290