

Refrigeration Equipment
1-Hinged Glass Door Full Height Ice Cube Merchandiser Freezer 26.75" Long



738321
(KCHGICM23FB) 1-Hinged Glass Door Full Height Ice Cube
Merchandiser Freezer 26.75" Long

Short Form Specification

Item No.

1-glass door freezer with exterior back, bottom, and top panels in galvanized steel, exterior side panels in painted steel; interior back, side, top in painted aluminum, and interior bottom panel in 304 stainless steel. Electronic control.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- External digital temperature display.
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Decorative illuminated header, customizable for enhanced branding capability
- Integrated interior wall spacers, for consistent airflow performance
- On/off switch controls interior LED lights
- Removable rubber bumper guards for airflow spacing and shock absorption

Construction

- Painted black steel exterior, for durable and sleek modern finish
- Self closing doors.
- White aluminum interior, bright and clean polished look for elevated presentation
- Lockable door.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- 60 mm insulation for energy saving.


APPROVAL: _____

Part of




Kelvinator Commercial
www.kelvinatorcommercial.com

Front

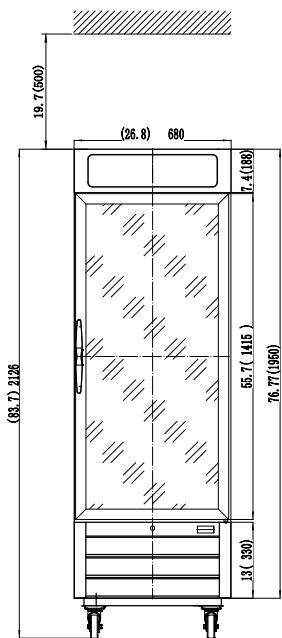


Side

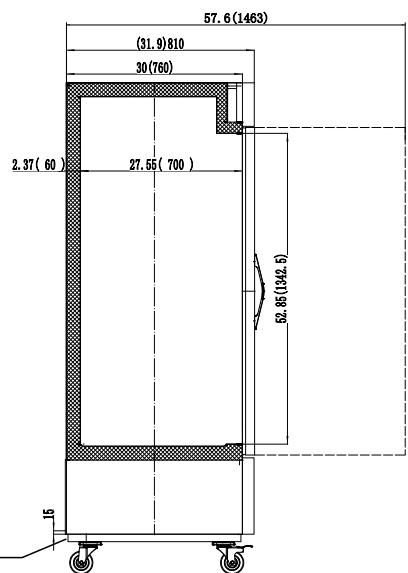

El = Electrical connection

Top

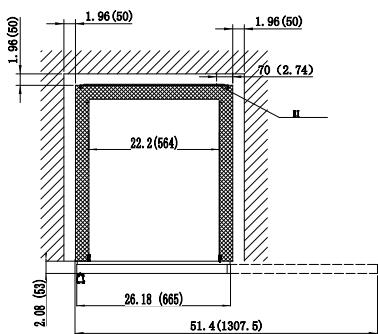

Electric

Supply voltage: 115 V/1 ph/60 Hz
Electrical power, max: 0.96 kW
Plug type: NEMA 5-15

Capacity:

Gross capacity: 21.3 cu.feet

Key Information:

Warranty: 3 / 5 years
Capacity: 21.316 cu.ft.
External dimensions, Width: 26 3/4" (680 mm)
External dimensions, Depth: 31 7/8" (810 mm)
External dimensions, Height: 83 11/16" (2126 mm)
Internal Dimensions (depth): 27 1/2" / (698.5 mm)
Internal Dimensions (height): 52 3/8" / (1330.96 mm)
Internal Dimensions (width): 22 3/16" / (563.88 mm)
Shipping height: 85 13/16" (2180 mm)
Shipping weight: 342 lbs (155 kg)
Shipping volume: 49.05 ft³ (1.39 m³)
Type of external material: Black Prepainted Steel
Type of internal material: White Prepainted Aluminium
Approvals: ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type: Fin & tube
Operating temperature min.: 17.6 °F
Compressor power: 1 hp
Operating temperature max.: 23 °F
Defrost type: Automatic

Sustainability

Current consumption: 8 Amps
Refrigerant type: R290
GWP Index: 3
Refrigerant weight: 110 g

