

COMMERCIAL

Refrigeration Equipment 2-Hinged Glass Door Full Height Ice Cube Merchandiser Freezer 54 " Long



738322 (KCHGICM49FB)

2-Hinged Glass Door Full Height Ice Cube Merchandiser Freezer 54 " Long

Short Form Specification

Item No.

2-glass door freezer with exterior back, bottom, and top panels in galvanized steel, exterior side panels in painted steel; interior back, side, top in painted aluminum, and interior bottom panel in 304 stainless steel. Electronic control.

R290 gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5Years warranty

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- External digital temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

Construction

- Lockable door.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.


APPROVAL:



Kelvinator Commercial www.kelvinatorcommercial.com



Refrigeration Equipment 2-Hinged Glass Door Full Height Ice Cube Merchandiser Freezer 54" Long

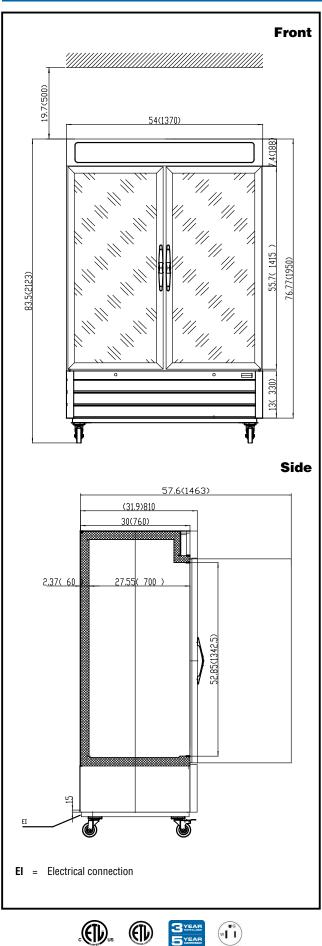

Electric

Supply voltage: 738322 (KCHGICM49FB) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 1.08 kW NEMA 5-15
Capacity:	
Gross capacity:	47.2 cu.feet
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material: Warranty: Approvals	53 15/16" (1370 mm) 31 7/8" (810 mm) 83 11/16" (2126 mm) 27 1/2" / (698.5 mm) 52 3/8" / (1330.96 mm) 49 3/8" / (1254.76 mm) 85 13/16" (2180 mm) 580 lbs (263 kg) 96.06 ft ³ (2.72 m ³) Black Prepainted Steel White Prepainted Aluminium 3 / 5 years ETL C&USETL SANITATION
Refrigeration Data	
Compressor power: Operating temperature min.:	1 1/4 hp 17.6 °F

	,
Operating temperature min.:	17.6 °F
Operating temperature max.:	23 °F
Condenser type:	Fin & tube
Defrost type:	Automatic

9 Amps R290 3

150 g

Sustainability

Current consumption:	
Refrigerant type:	
GWP Index:	
Refrigerant weight:	

Refrigeration Equipment 2-Hinged Glass Door Full Height Ice Cube Merchandiser Freezer 54 "Long The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.

15A 125V NEMA 5-15P

Intertek

Intertek