

**Refrigeration Equipment  
2-Hinged Glass Door Full Height Ice  
Cube Merchandiser Freezer 54  
" Long**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738322 (KCHGICM49FB)

2-Hinged Glass Door Full  
Height Ice Cube  
Merchandiser Freezer 54  
" Long

**Short Form Specification**

Item No. \_\_\_\_\_

2-glass door freezer with exterior back, bottom, and top panels in galvanized steel, exterior side panels in painted steel; interior back, side, top in painted aluminum, and interior bottom panel in 304 stainless steel. Electronic control.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5Years warranty

**Main Features**

- External digital temperature display.
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Decorative illuminated header, customizable for enhanced branding capability
- Integrated interior wall spacers, for consistent airflow performance
- On/off switch controls interior LED lights
- Removable rubber bumper guards for airflow spacing and shock absorption


**Construction**

- Painted black steel exterior, for durable and sleek modern finish
- Self closing doors.
- White aluminum interior, bright and clean polished look for elevated presentation
- Lockable door.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.

**Sustainability**

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- 60 mm insulation for energy saving.

APPROVAL: \_\_\_\_\_

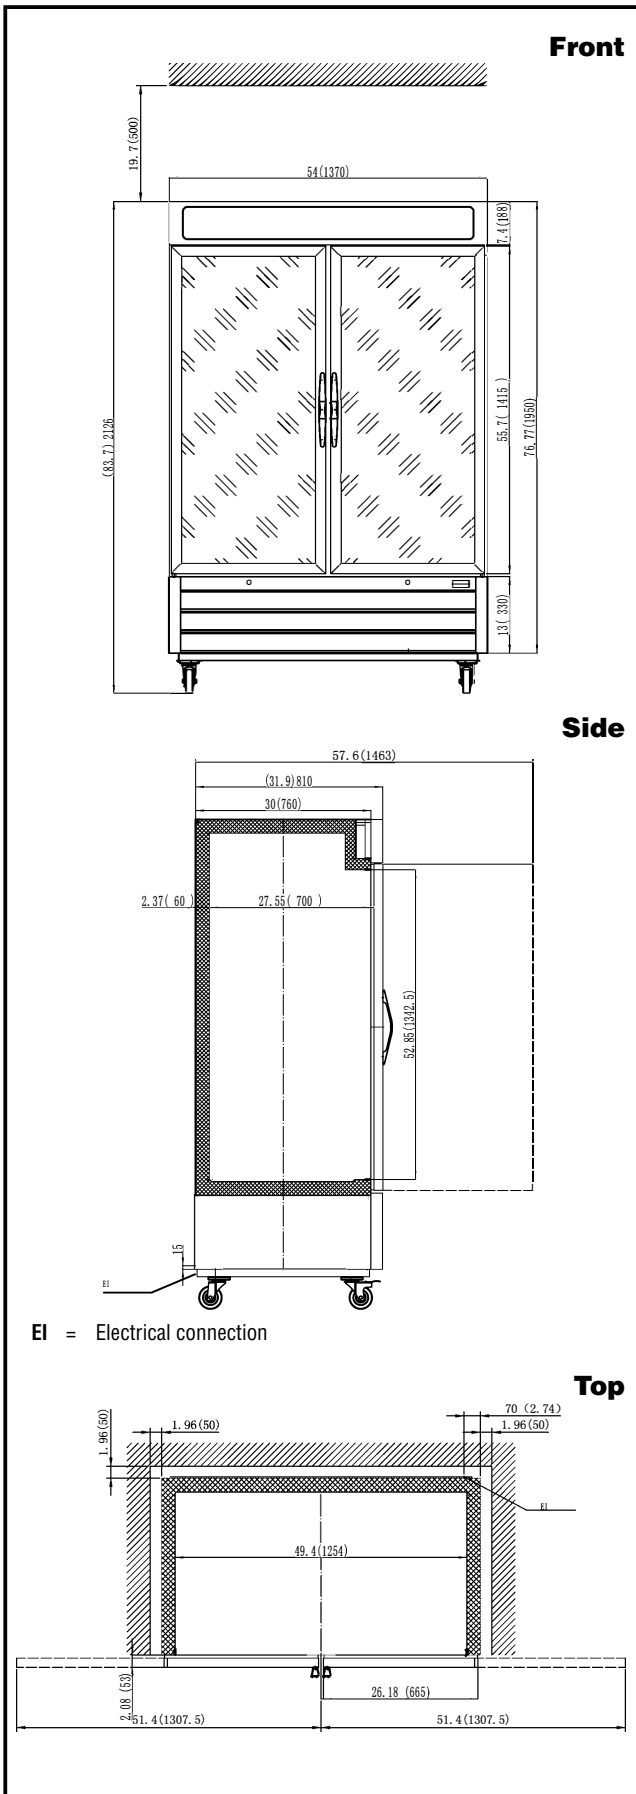

## Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	1.08 kW
Plug type:	NEMA 5-15

## Capacity:

Gross capacity:	47.2 cu.feet
-----------------	--------------

## Key Information:

Warranty:	3 / 5 years
External dimensions, Width:	53 15/16" (1370 mm)
External dimensions, Depth:	31 7/8" (810 mm)
External dimensions, Height:	83 11/16" (2126 mm)
Internal Dimensions (depth):	27 1/2" (698.5 mm)
Internal Dimensions (height):	52 3/8" / (1330.96 mm)
Internal Dimensions (width):	49 3/8" / (1254.76 mm)
Shipping height:	85 13/16" (2180 mm)
Shipping weight:	580 lbs (263 kg)
Shipping volume:	96.06 ft <sup>3</sup> (2.72 m <sup>3</sup> )
Type of external material:	Black Prepainted Steel
Type of internal material:	White Prepainted Aluminium
Approvals	ETL C&US;ETL SANITATION

## Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	17.6 °F
Compressor power:	1 1/4 hp
Operating temperature max.:	23 °F
Defrost type:	Automatic

## Sustainability

Current consumption:	9 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	150 g